
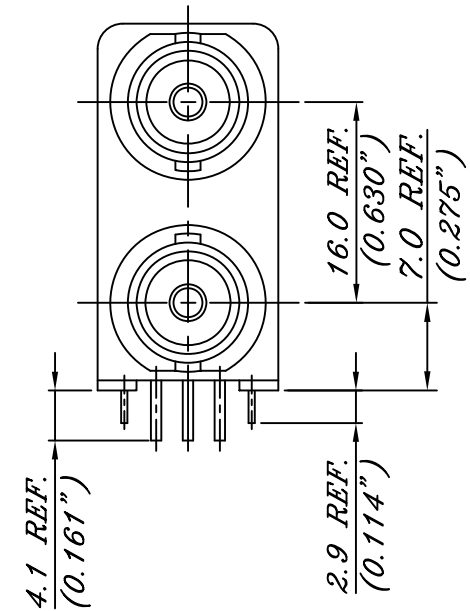
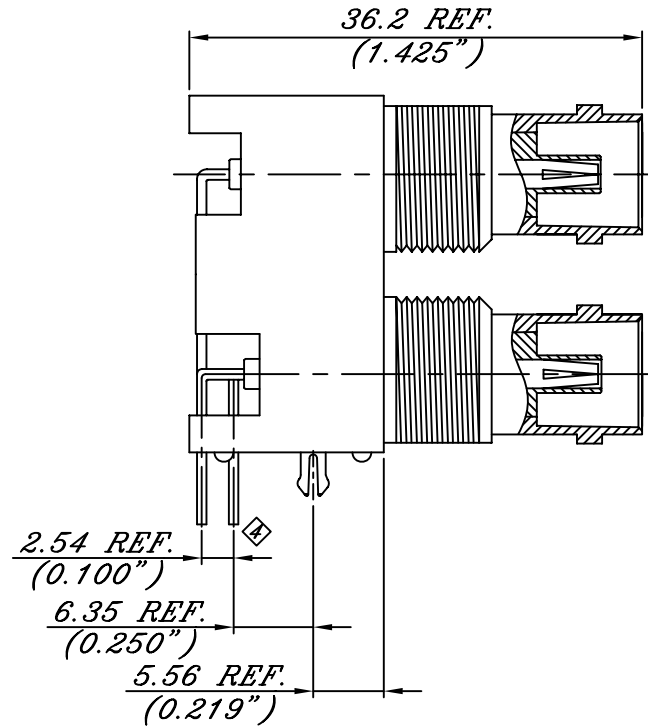
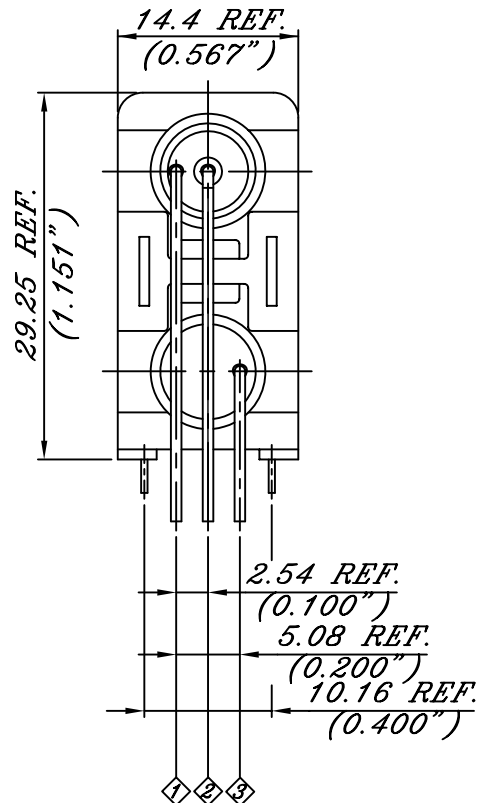


SPECIFICATIONS:

MECHANICAL CHARACTERISTICS:
MATING/UNMATING-500 CYCLES.

ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE-75 OHMS.
FREQUENCY RANGE-0~1 GHz
OPERATING VOLTAGE-500 VOLTS RMS.
CONTACT RESISTANCE-3.0 MILLIOHMS MAX.(GOLD)
DIELECTRIC WITHSTANDING VOLTAGE- 1500 VOLTS RMS.
INSULATION RESISTANCE-5000 MEGOHMS MIN.

ENVIRONMENTAL CHARACTERISTICS:
TEMPERATURE RANGE- -65°C TO +165°C.
THERMAL SHOCK-MIL-STD-202,METHOD 107,COND.B.
PHYSICAL SHOCK-MIL-STD-202,METHOD 204,COND.B.

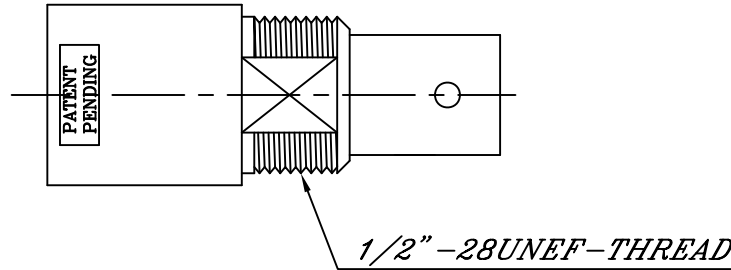

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BNCB1-JRXFM-75-LF

SERIES

LEADFREE

75 OHM


FULL METAL

NON POST

DIP 90°

JACK

DESCRIPTION: DUAL PORTS BNC R/A PCB MOUNT RECEPTACLE (IMPEDANCE 75 Ω)

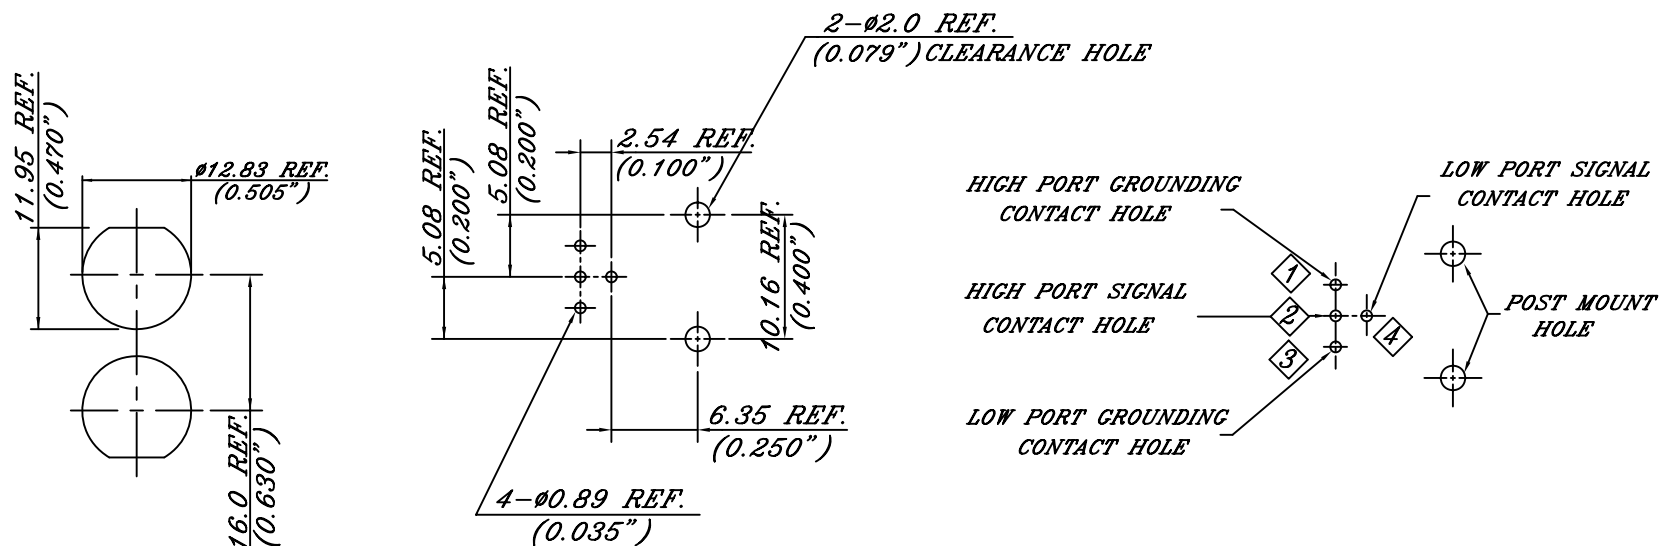

PANEL CUTOUT

RECOMMEND P.C.B LAYOUT

RECOMMENED P.C.B LAYOUT

ITEM	DESCRIPTION	MATERIAL & TERATMENT	REMARK
1	HOUSING	PBT+30%G.F	
2	CONN. BODY	NICKEL PLATING OVER ZINC ALLOY.	
3	CENTER CONTACT	PHOSPHORUS BRONZE WITH GOLD PLATING AT CONTACT AREA TIN PLATING AT TAIL & NICKEL PLATING OVERALL.	
4	INSULATOR	POLYPROPYLENE UL 94HB.	
5	GROUNDING TERMINAL	COPPER PLATED STEEL WITH TIN PLATING $\triangle$	
6	MOUNTING HOOK	TIN PLATING OVER BRASS.	

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION $\rightarrow$

照片框

ORDER INFORMATION

BNCB1-JRXFM-75-LF

SERIES

LEADFREE

75 OHM

FULL METAL

NON POST

DIP 90°

JACK

DESCRIPTION: DUAL PORTS BNC R/A PCB MOUNT RECEPTACLE (IMPEDANCE 75 Ω)