


Specification:

1. Usage: camera or monitor side
2. Connector for camera/monitor: BNC Male pigtail
3. Connector for the wires: screw terminal
4. Wire Required
UTP Wire Cable: 24 AWG solid copper twisted pair wire, Cat.5 or better
5. UTP Cable Transmit Video Distance: Cat.5 Color / 300 Meters
6. Frequency response: DC to 6.5 MHz
7. Attenuation: 75 ohm to 100 ohm about 0.4 dB
8. Impedance: Coax Cable - 75 ohm, UTP Cable - 100 ohm
9. Coax Cable: Unbalanced, 75 ohm
10. UTP Cable: Balanced, 100 ohm
11. Environment required : Operating temp. 0 to 65° C
12. Storage temp : -22 to 85° C

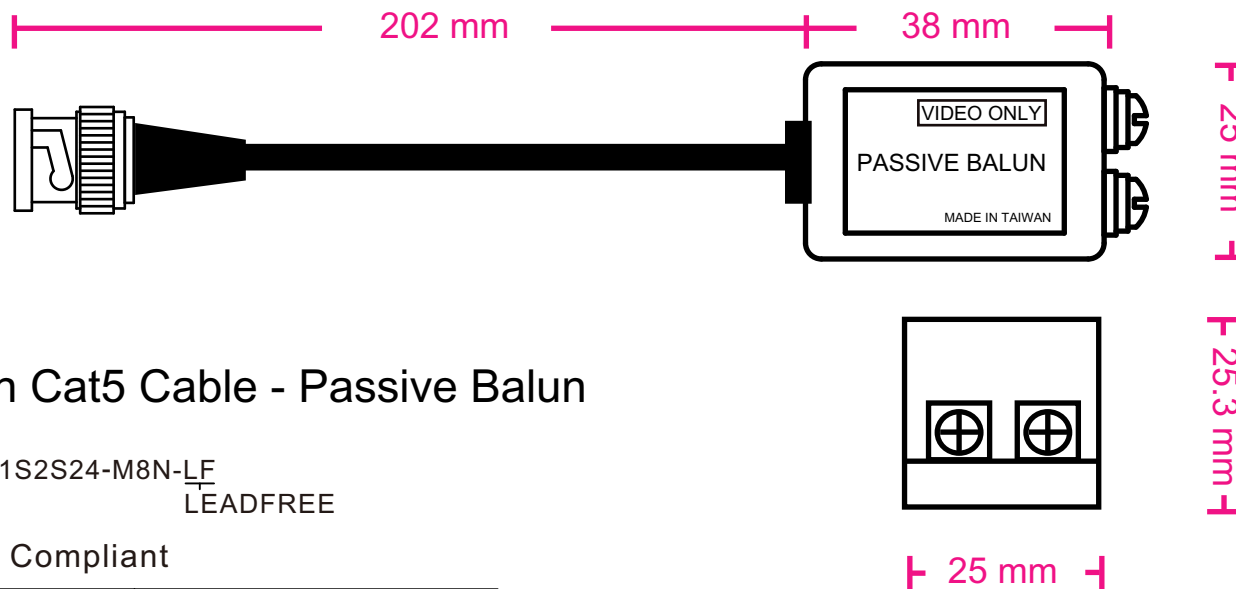

Video Through Cat5 Cable - Passive Balun

BNCYT-1S2S24-M8N-LF
LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. BNCYT-1S2S24-M8N

DWG NO. BNCYT-1S2S24-M8N

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG

DESCRIPTION:

AREA

BNC male pigtail to screw terminal

REVISIONS

DATE

煜倫股份有限公司