





1.8ømm PC Board Crimp Terminal

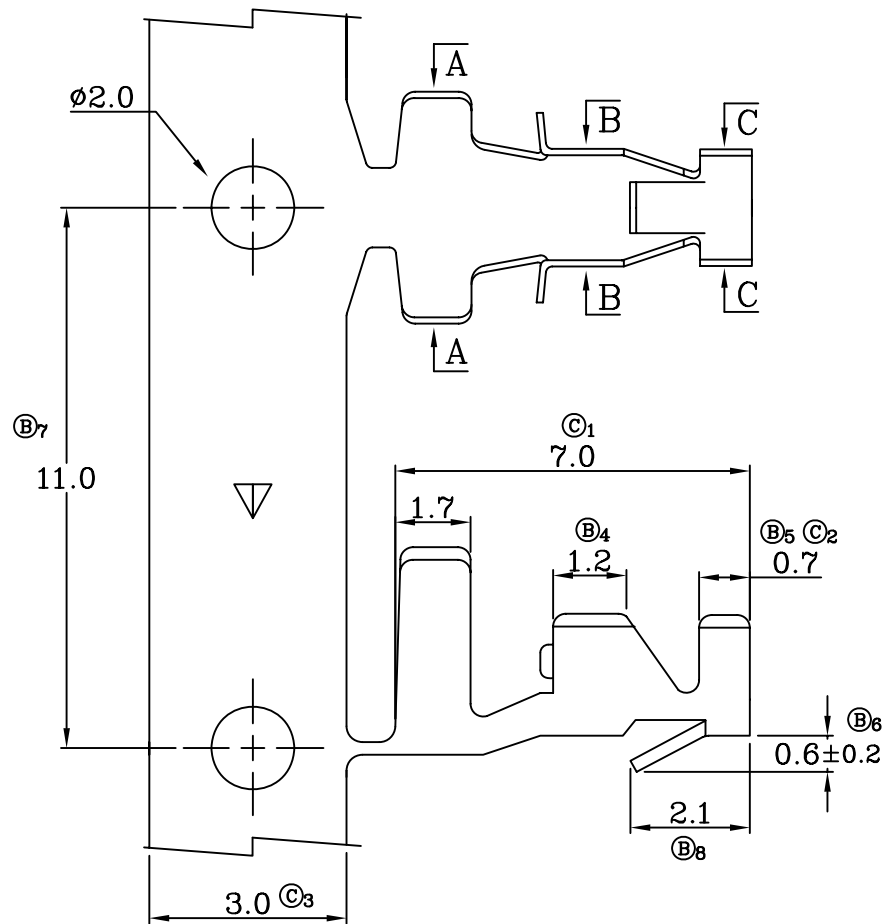


Section A-A



Section B-B



Section C-C



P.C.B. LAYOUT

Rev.	變更內容
A-B	Ⓑ ₁ 4.7±0.3 變為 4.8±0.3
	Ⓑ ₂ 2.2±0.3 變為 2.4±0.3
	Ⓑ ₃ 2.3±0.3 變為 2.6±0.3
	Ⓑ ₄ 1.3±0.25 變為 1.2±0.25
	Ⓑ ₅ 0.75±0.1 變為 0.7±0.1
	Ⓑ ₆ 0.5±0.2 變為 0.6±0.2
	Ⓑ ₇ 11.2±0.1 變為 11.0±0.25
	Ⓑ ₈ 新增尺寸 2.1±0.25
B-C	Ⓒ ₁ 7.0±0.1 變為 7.0±0.25
	Ⓒ ₁ 0.7±0.1 變為 0.7±0.25
	Ⓒ ₁ 3.0±0.1 變為 3.0±0.25

Specifications & Ordering Information:

Part No	Thickness	Material	Wire Range	Insulation O.D.	Finish	Qty/reel
BT-D18-16	0.2	Brass	AWG #16-20	3.1-2.55 mm	Pre. Tin-Plated	5,000 PCS

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BT-D18-16-LF

SERIES

LEADFREE

16~20AWG

PCB HOLE 1.8mm

DESCRIPTION: