
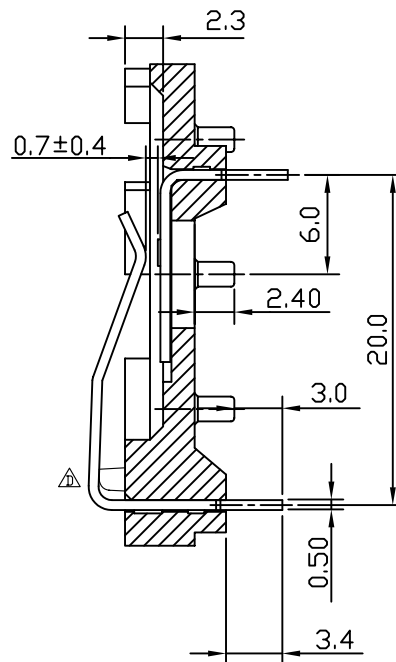
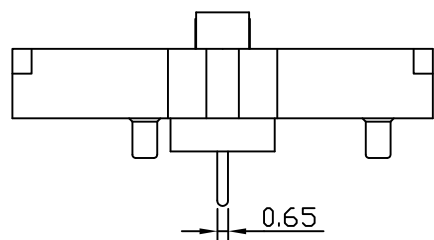


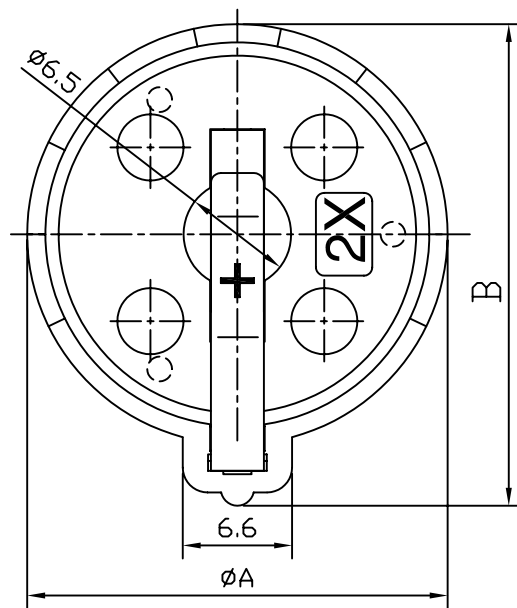

NOTES

1. MATERIALS:

HOUSING-PBT 30%GF UL94V-0.


"+"CONTACT-PHOSPHOR BRONZE, T=0.5mm.

"-"CONTACT-BRASS, T=0.5mm.

2. FLASH: 0.25mm MAX.

3. CAMBER: 0.13mm MAX. DEFORMATION: NA.

WARP: 0.13mm MAX. TWIST: NA.

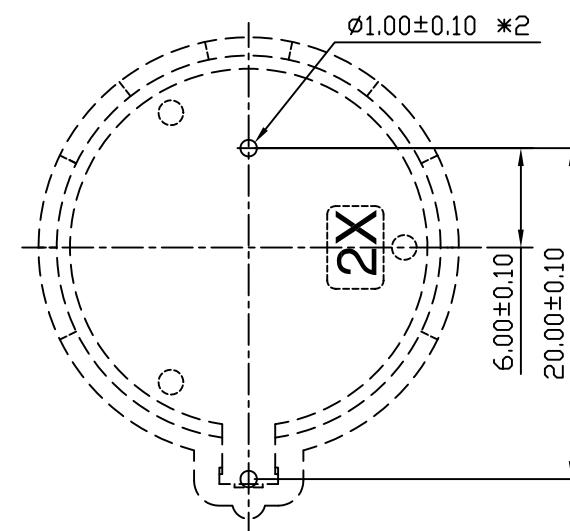

RECOMMEND PCB LAYOUT COMPONENT SIDE

PART NO	øA	B
BTH-D-20	22.8	27.8
BTH-D-23	25.4	29.0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BTH-D-xx-LF
SERIES | LEADFREE
20:FOR2032
23:FOR2325
DIP 180°

DESCRIPTION: BATTERY HOLDER ASS'Y