
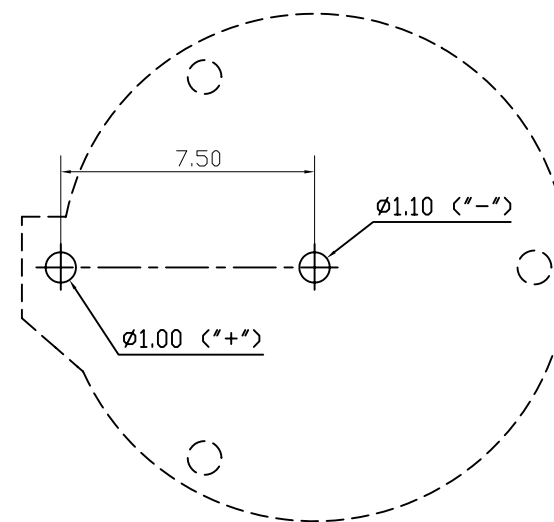
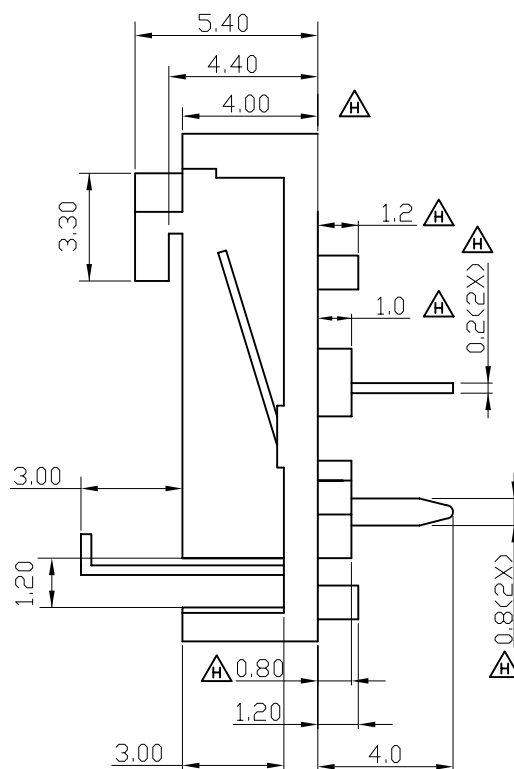


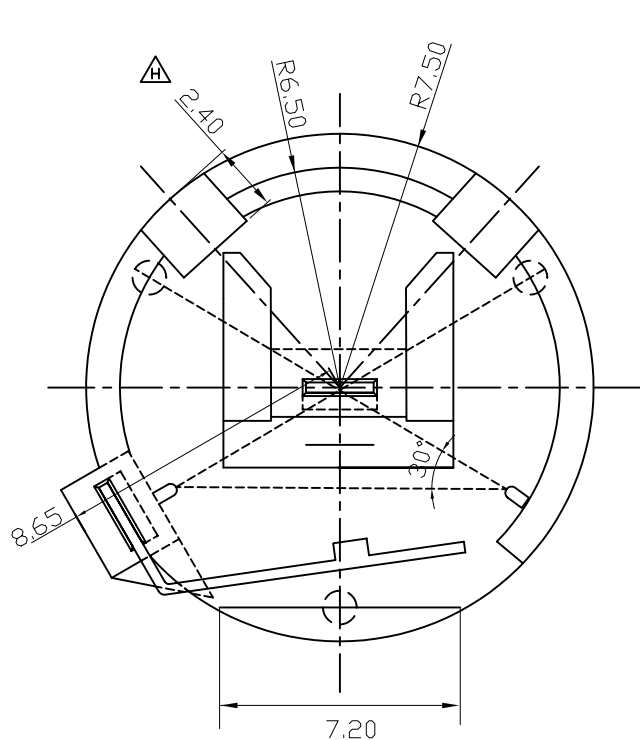

PCB LAYOUT

NOTE:

1.MATERIAL:HOUSING-PBT+30%G.F. UL94V-0

TERMINAL-PHOSPHOR BRONZE

2.THIS TYPE JUST USED BATERRY'S DIM:

D=Ø12.50mm T=2.45mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BTH-D54-12-LF
SERIES LEADFREE
CR1225
HIGH 5.4mm
DIP 180°

DESCRIPTION: Battery Holder Dip Ass,y for CR1225