
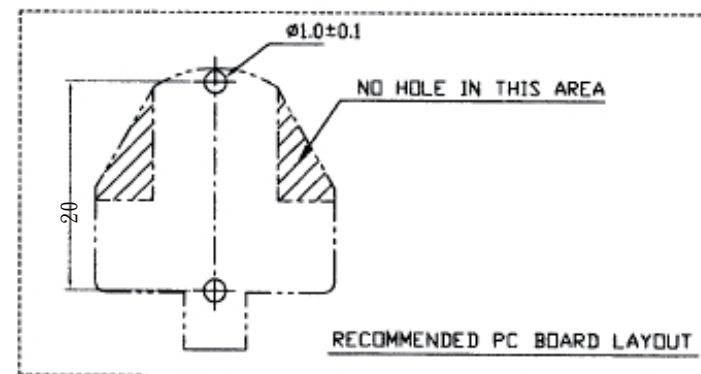
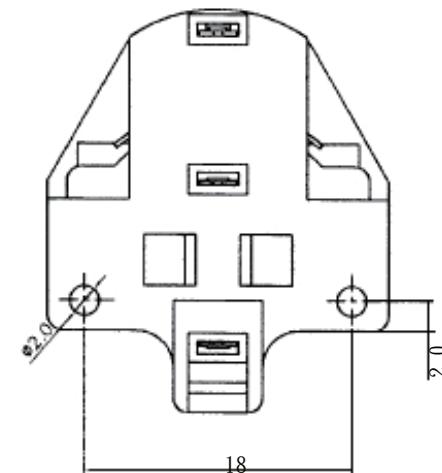
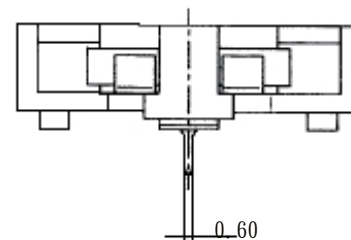


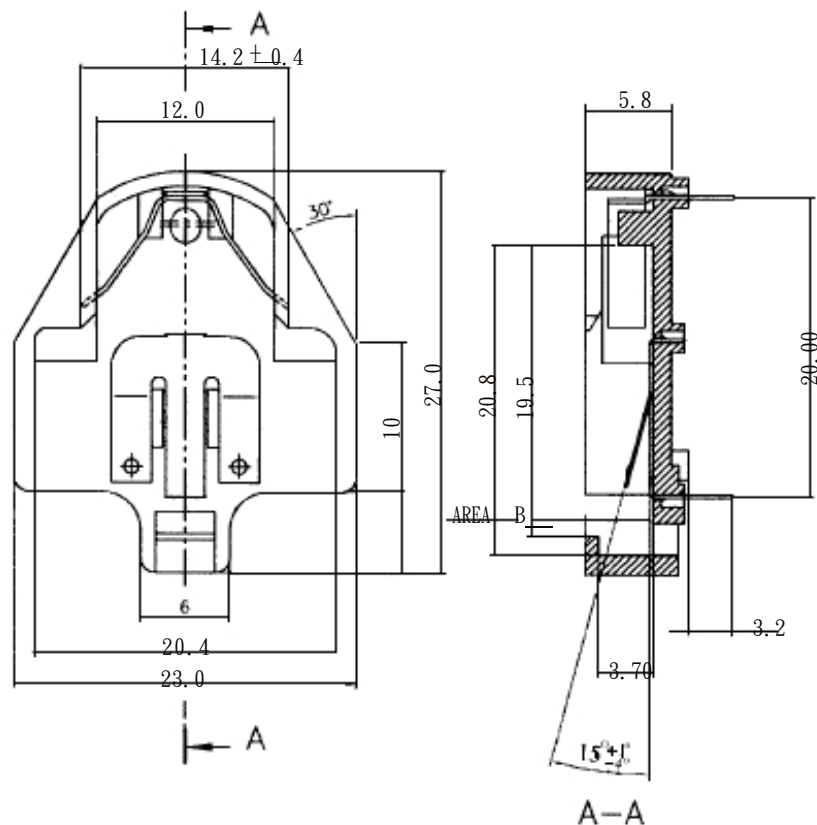

NOTE

1. MATERIALS: HOUSING PBT UL94V-0.
CONTACT PHOSPHOR BEONZE
2. PLATING:
 - 1) TIN/LEAD 90/10 100u" MIN, OVER Ni 50u" MIN
 - 2) NICKEL 80u" MIN.
3. FLASH, AREA B: NA. OTHERS 0.20mm MAX.
4. CAMBER: 0.05mm/cm MAX, DEFORMATION: NA,
WARPAGE: 0.05mm/cm MAX, TWIST: NA.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

BTH-D70-20-LF

SERIES
DIP 180°
HIGH 7.0mm
FOR CR2032
LEADFREE

DESCRIPTION: