
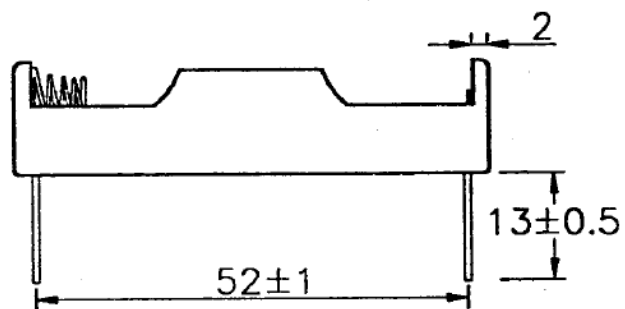



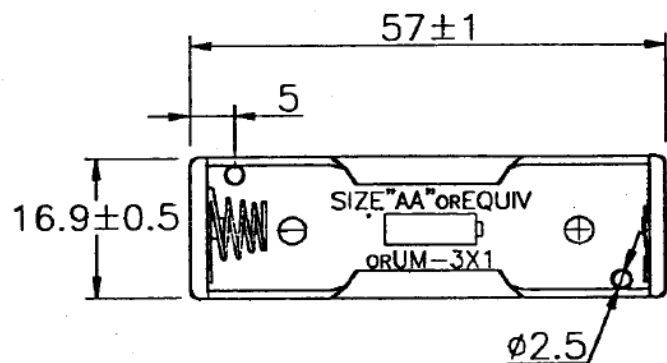

SPECIFICATION

- (1) PIN: $\varnothing 0.8 \times 24 \text{MM}$
- (2) MATERIAL: P.P. RESIN, BLACK COLOR
- (3) SPRING: 0.6MM 65C SPRING WIRE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PROJECTION



ORDER INFORMATION

BTH-DP-1AA-LF
SERIES | LEADFREE
1AA TYPE
POST
DIP 180°

DESCRIPTION: