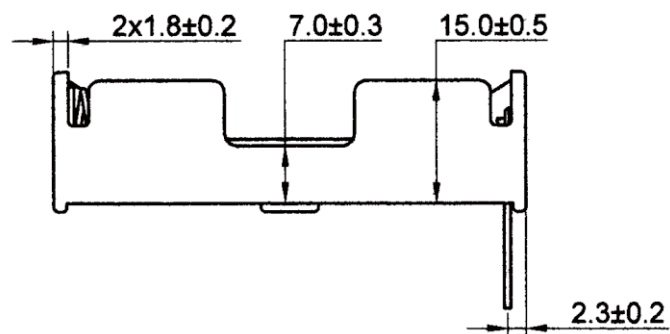
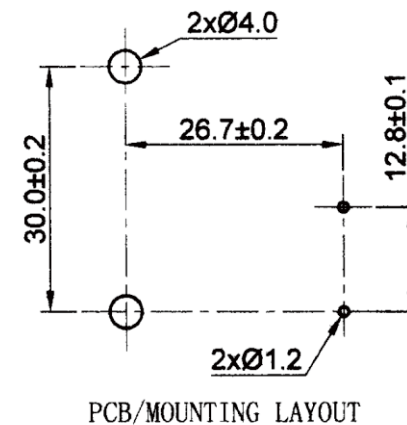
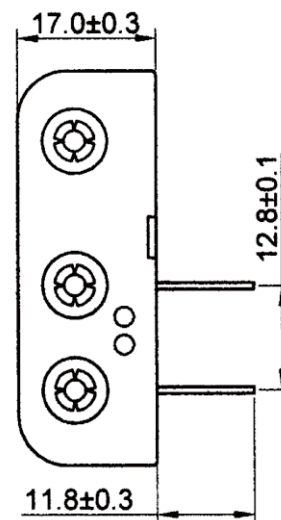
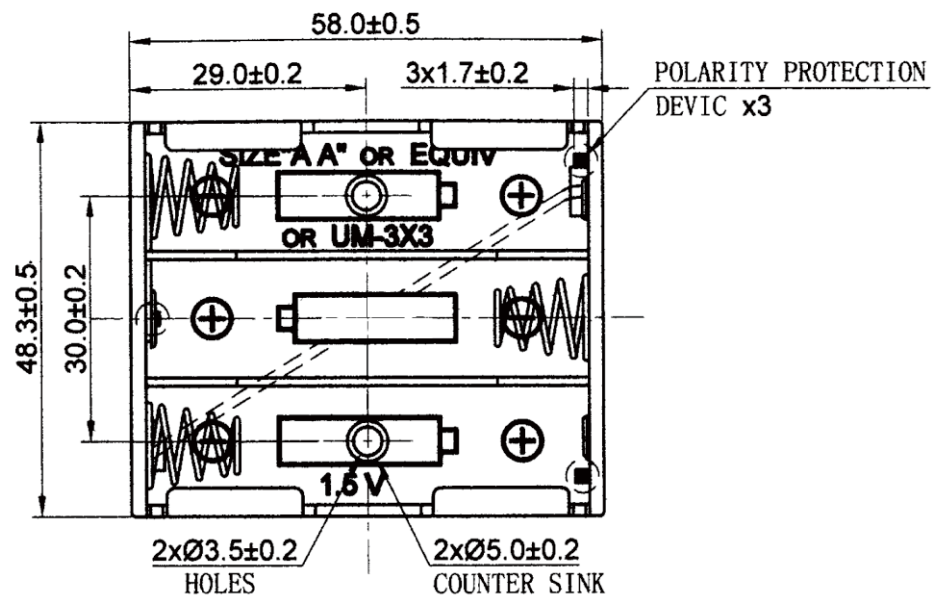


SPECIFICATION

- (1) WITH PIN: $\varnothing 0.8 \times 24$ MM, BRASS NICKEL PLATED
- (2) HOLDER MATERIAL: P.P. RESIN, BLACK COLOR
- (3) SPRING MATERIAL: $\varnothing 0.7$ MM 65C SPRING STEEL NICKEL PLATED
- (4) RIVET MATERIAL: BRASS NICKEL PLATED
- (5) RoHS COMPLIANT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION Φ

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

BTH-DP-3AA-LF
SERIES | LEADFREE
3AA TYPE
POST
DIP 180°

DESCRIPTION: