
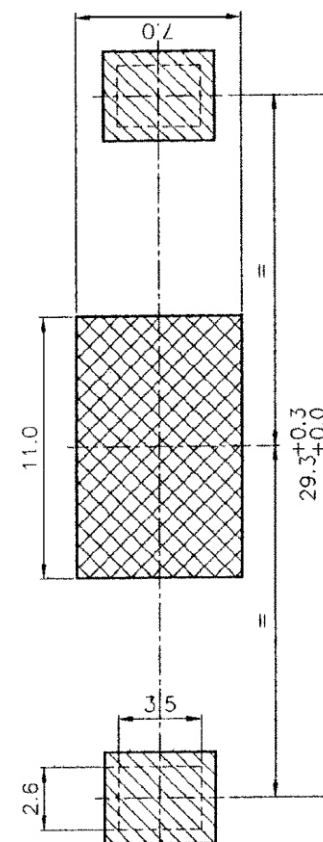
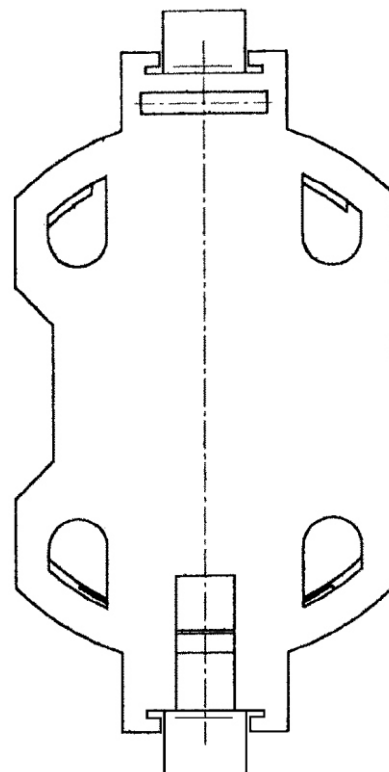
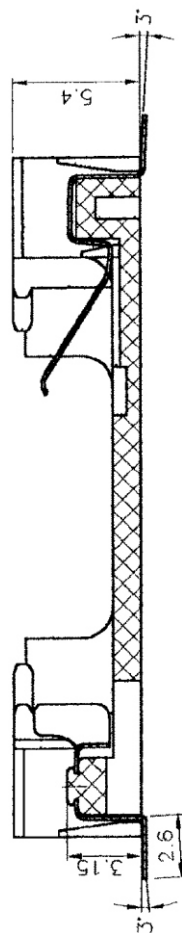


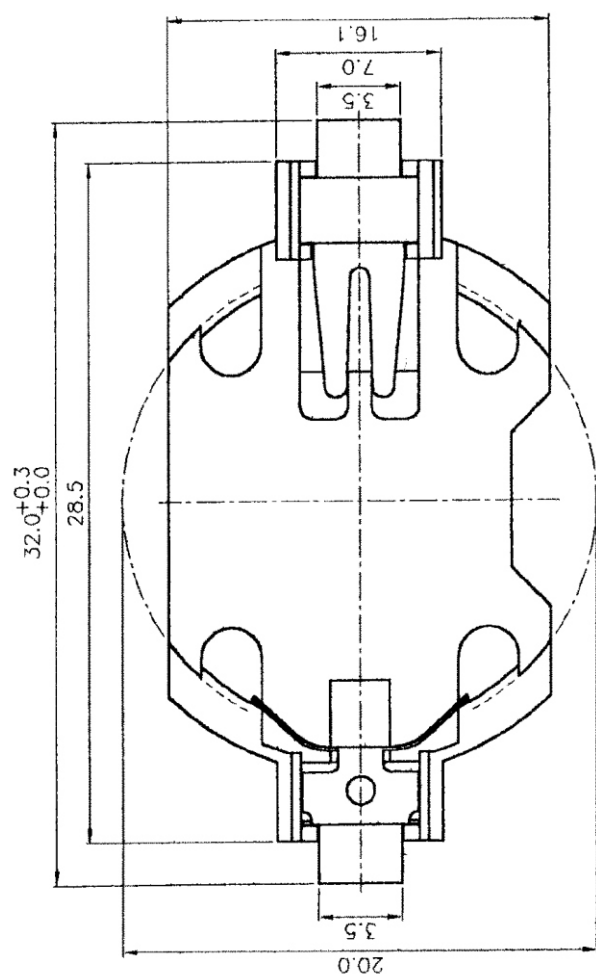

NOTES:

- 1.RATING : DC 3V, 120mA
- 2.MATERIAL:
HOUSING -MODIFIED POLYAMIDE 6T
ARLEN UL94V-0
CONTACT -STAINLESS STEEL 301

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±


PPOJECTION

照片框


ORDER INFORMATION

BTH-V56R-20-LF
SERIES | LEADFREE
CR 2032
REEL
HIGH 5.6mm
180°SMT

DESCRIPTION:

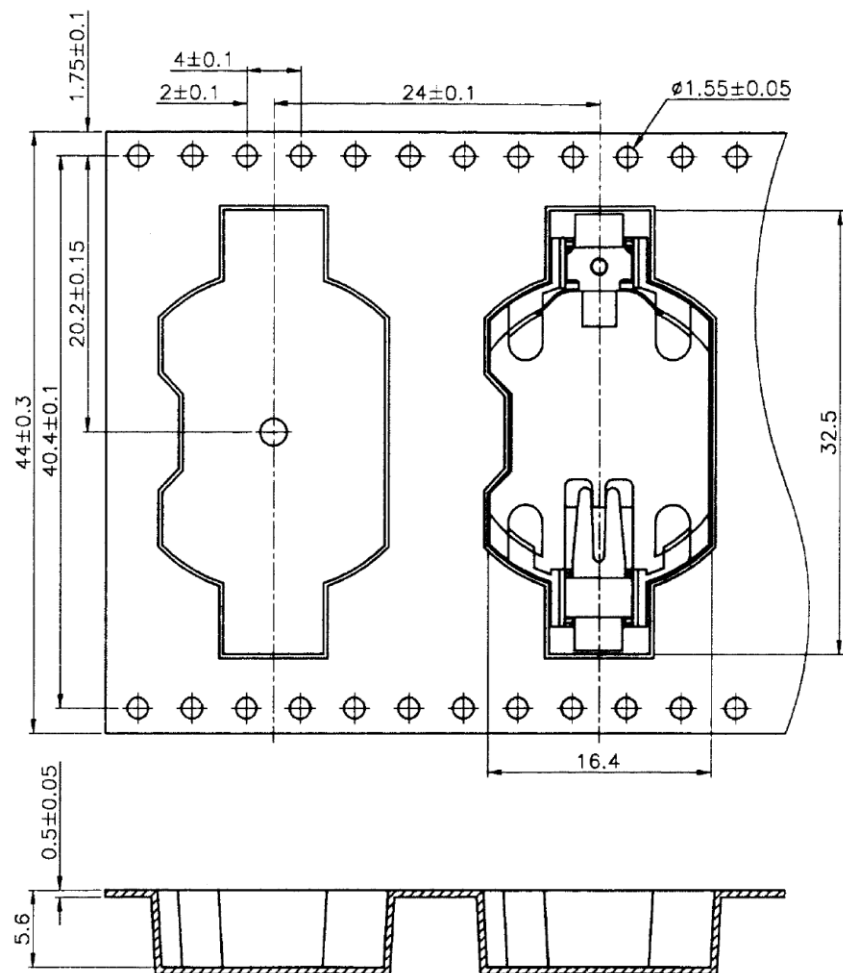

Unless other specified, tolerance is ± 0.2 mm
 Scale: 2 : 1

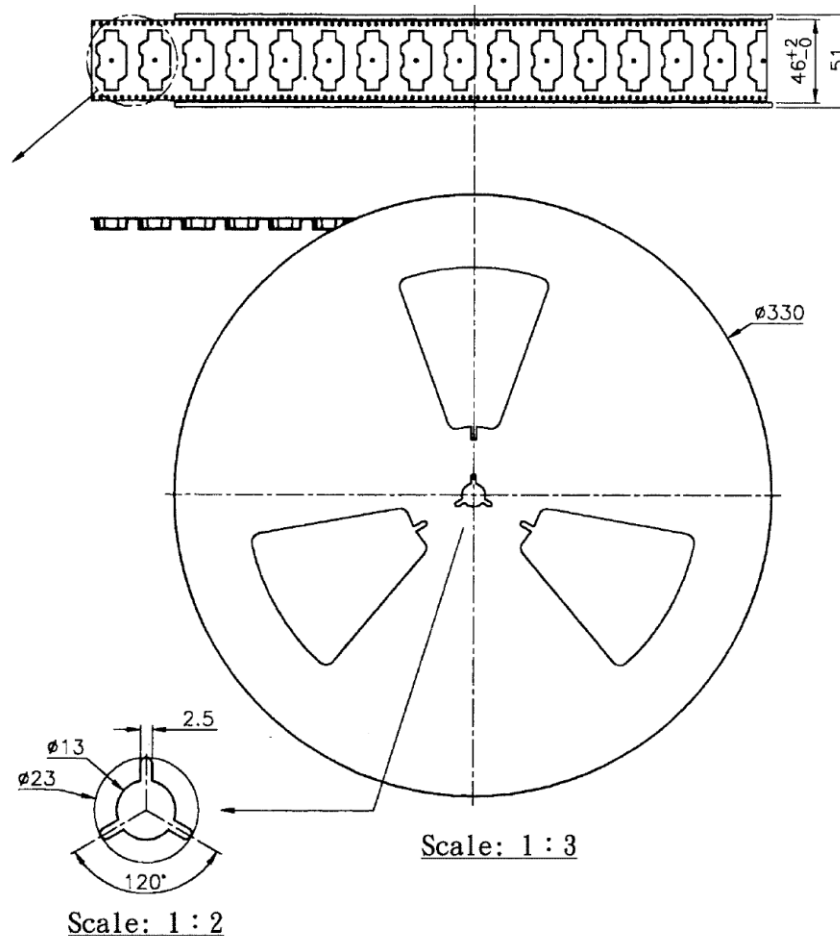

Scale: 1 : 3

2032 500pcs packed in a tapping reel.

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
 X, $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

BTH-V56R-20-LF
 SERIES REEL HIGH 5.6mm 180°SMT
 LEADFREE
 CR 2032

DESCRIPTION: