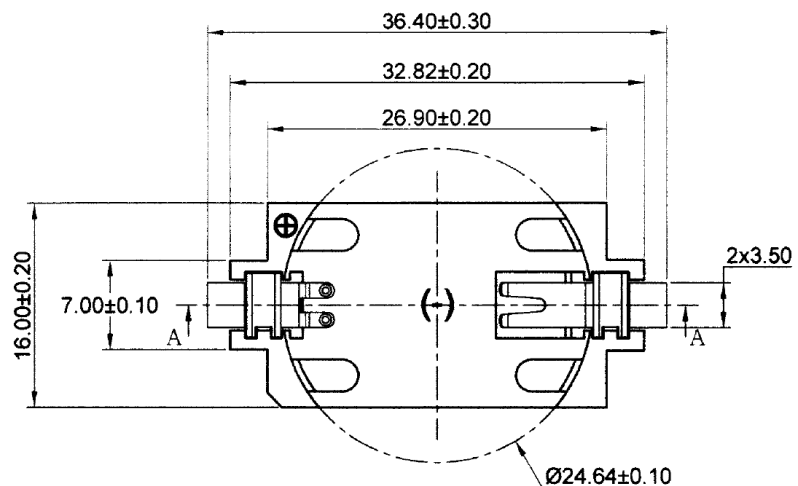


PCB MOUNTING LAYOUT

SPECIFICATION

HOUSING MATERIAL: LCP+30%GF UL 94V0 WHITE COLOR
 CONTACT MATERIAL: PHOSPHOR BRONZE 0.15MM THICKNESS
 GOLD 1U" PLATED OVER Ni 50U" MIN
 CURRENT RATING: 2A (AC/DC)
 VOLTAGE RATING: 500V (AC/DC)
 CONTACT RESISTANCE: 30 MILLIOHMS
 INSULATION RESISTANCE: 500 MEGAOHMS
 TEMPERATURE RANGE: -55℃ TO +85℃
 HUMIDITY: 40℃ AND 90~95% RH FOR 96 HOURS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

BTH-V75-24-LF
 SERIES | LEADFREE
 CR 2450
 HIGH 7.5mm
 180°SMT

DESCRIPTION: