



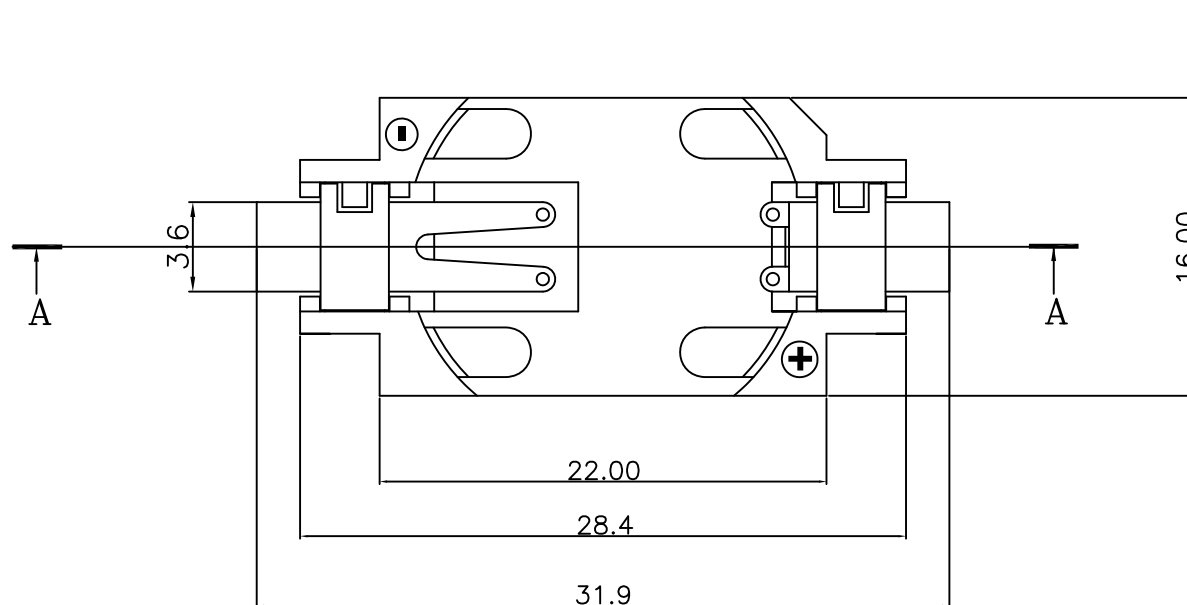


B X 4(NOTES 2)

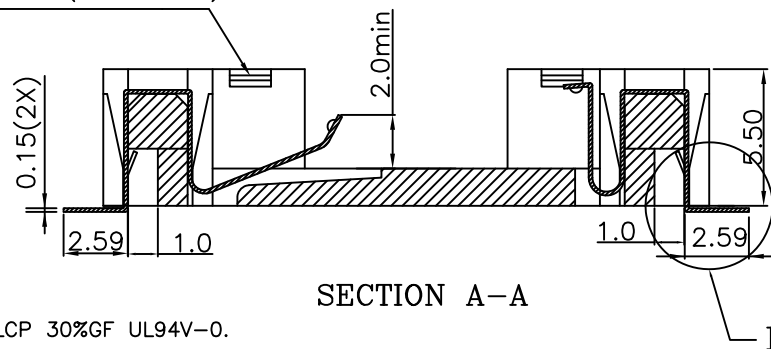


SECTION A-A

NOTES

1. MATERIALS: HOUSING-LCP 30%GF UL94V-0.
CONTACT-PHOSPHOR BRONZE C5191R-H.

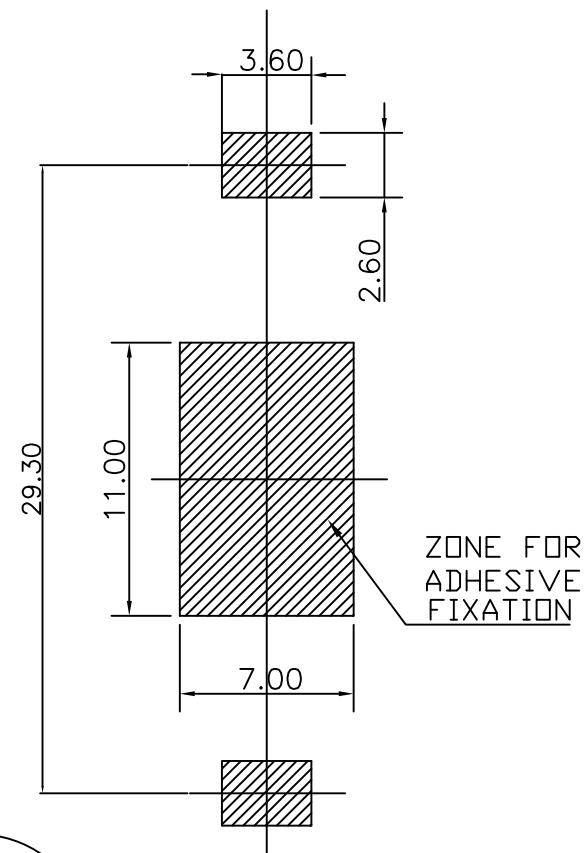

PCB LAYOUT



VIEW B

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 3°


PPOJECTION



ORDER INFORMATION

BTH-VR-20-LF
SERIES | LEADFREE
CR 2032
REEL
180°SMT

DESCRIPTION:

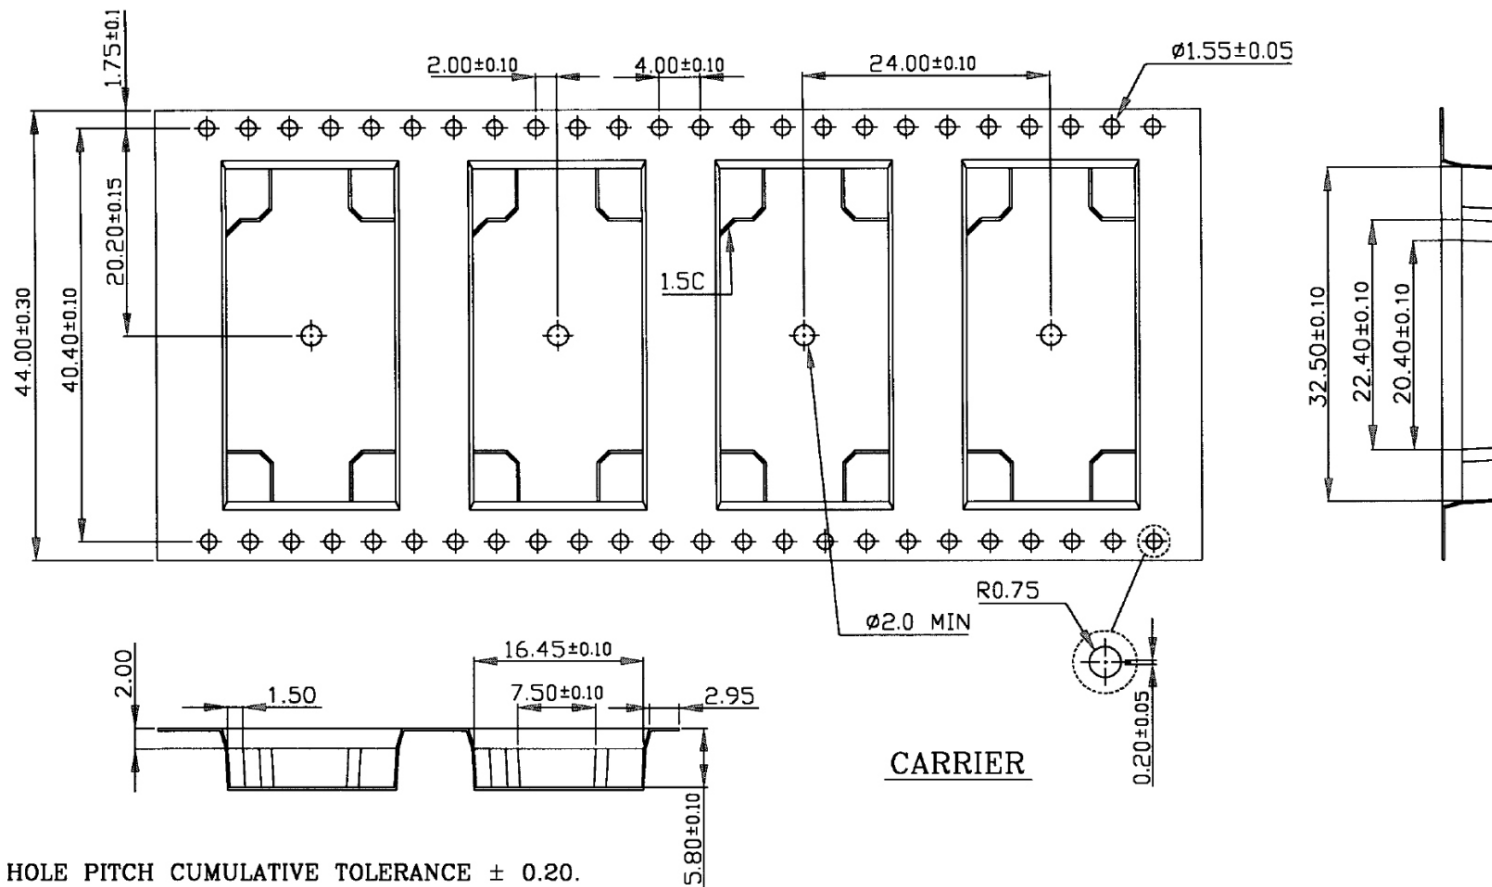

NOTE:

- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.20 .
- 2.CARRIER CAMBER IS WITHIN 1mm in 100mm.
- 3.MATERIAL:BLACK CONDUCTIVE POLYSTYRENE ALLOY
(UP-5000)100% RECYCLABLE.
- 4.ALL DIMENSIONS MEET EIA-418-3 REQUIREMENTS.
- 5.THICKNESS:0.36 $\pm$ 0.05mm.
- 6.PACKING LENGTH per 22" REEL:38.5 METERS.
- 7.COMPONENT LOAD PER 13"REEL: 500 PCS.
- 8.PEEL FORCE (300mm/min): 8mm: 30~100g
12~56mm: 30~100g

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

BTH-VR-20-LF
SERIES | LEADFREE
CR 2032
REEL
180°SMT

DESCRIPTION: