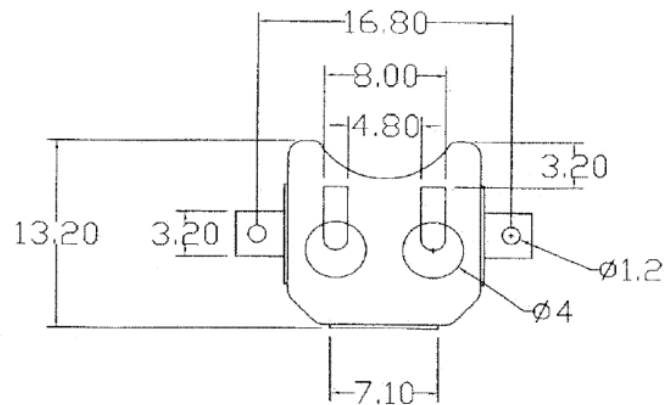


Pat Layout

PART NAME: BATTERY CLIP.

MATERIAL: "PHOSPHOR BRONZE" 0.25mm THICK, NICKEL PLATED.

GENERAL TOLERANCE: +/- 0.2mm.

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

ORDER INFORMATION

BTH-W32R-12-LF
SERIES REEL LEADFREE
CR1220
HIGH 3.2mm
90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION:

DEVICE TYPE:CR1220SMD(PV-68-A1)





CUSTOMER :

DWG NO :CM0704

MATERIAL :PS0.35黑色

DATE :102.01.24

ITEM	W	A0	B0	K0	K1	P	E	F	D	D1	P0	P2
DIM	24 ^{+0.3} _{-0.3}	20.3 ^{+0.1} _{-0.1}	13.5 ^{+0.1} _{-0.1}	3.5 ^{+0.1} _{-0.1}	2.6 ^{+0.1} _{-0.1}	24 ^{+0.1} _{-0.1}	1.75 ^{+0.1} _{-0.1}	11.5 ^{+0.1} _{-0.1}	1.5 ^{+0.1} _{-0.0}	0 ^{+0.25} _{-0.0}	4.0 ^{+0.1} _{-0.1}	2.0 ^{+0.1} _{-0.1}

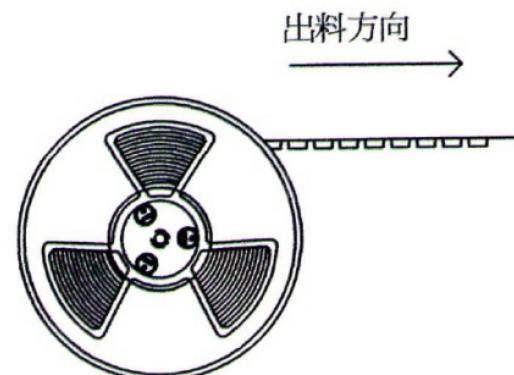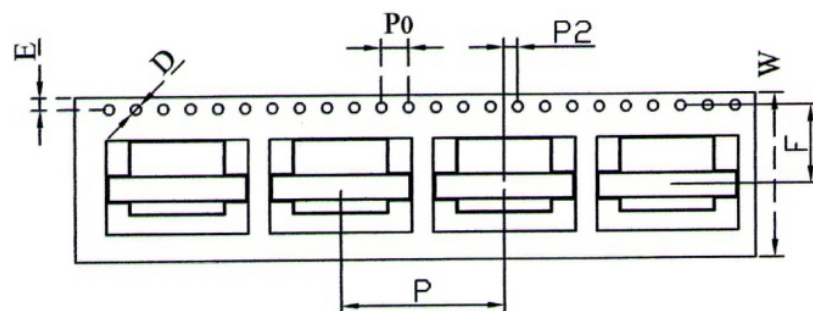

NOTE:

- 1.10 sprocket hole pitch cumulative tolerance ± 0.2
- 2.Carrier camber is 1mm in 100mm
- 3.A0 and B0 measured on a plane 0.3mm above the bottom of the pocket
- 4.K0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier
- 5.All dimensions meet EIA-481-2 requirements
6. 22" 1R= 57M 2250PCS 13"1R= 19M 750PCS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

BTH-W32R-12-LF
SERIES REEL LEADFREE
CR1220
HIGH 3.2mm
90°SMT

DESCRIPTION: