


PART NO.	APPROX. LENGTH	APPROX. WIDTH	MAX BUNDLE DIA	MIN. LOOP TENSILE STRENGTH kgs(Lbs.)
CBT-25-080	80(3.15")	2.5(0.10")	17(0.67")	8(18)
CBT-25-090	90(3.54")		21(0.83")	
CBT-25-098	98(3.86")		22(0.87")	
CBT-25-100	100(4.00")		23(0.91")	
CBT-25-120	120(4.72")		30(1.18")	
CBT-25-142	142(5.59")		36(1.42")	
CBT-25-160	160(6.30")		42(1.66")	
CBT-25-181	181(7.13")		49(1.92")	
CBT-25-203	203(8.00")		56(2.21")	
CBT-36-102	102(4.00")	3.6(0.14")	22(0.87")	18(40)
CBT-36-122	122(4.80")		29(1.14")	
CBT-36-142	142(5.59")		34(1.34")	
CBT-36-163	163(6.41")		40(1.57")	
CBT-36-185	185(7.28")		47(1.85")	
CBT-36-203	203(8.00")		55(2.17")	
CBT-36-232	232(9.13")		63(2.48")	
CBT-36-249	249(9.84")		63(2.48")	
CBT-36-263	263(10.35")		73(2.87")	
CBT-36-295	295(11.61")		83(3.27")	
CBT-36-331	331(13.00")	96(3.78")		
CBT-36-370	370(14.57")		108(4.25")	
CBT-48-115	115(4.53")	4.8(0.19")	29(1.15")	23(50)
CBT-48-140	140(4.50")		34(1.34")	
CBT-48-162	162(6.38")		42(1.66")	
CBT-48-188	188(7.40")		49(1.93")	
CBT-48-201	201(8.00")		53(2.08")	
CBT-48-216	216(8.50")		58(2.28")	
CBT-48-242	242(9.53")		66(2.60")	
CBT-48-266	266(10.47")		72(2.84")	
CBT-48-292	292(11.50")		82(3.23")	
CBT-48-330	330(13.00")		93(3.66")	
CBT-48-368	368(14.49")		106(4.17")	
CBT-48-410	410(16.14")		122(4.80")	
CBT-48-450	450(17.72")	135(5.31")		

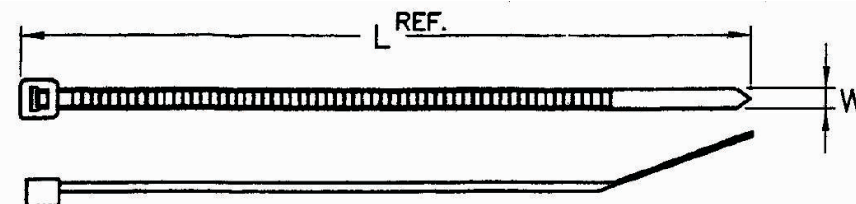

CBT-76-148	148(5.83")	7.6(0.30")	36(1.42")	54(120)
CBT-76-182	182(7.17")		46(1.81")	
CBT-76-215	215(8.46")		59(2.32")	
CBT-76-254	254(10.00")		71(2.80")	
CBT-76-293	293(11.54")		84(3.30")	
CBT-76-332	332(13.00")		95(3.74")	
CBT-76-368	368(14.49")		109(4.29")	
CBT-76-420	420(16.54")		124(4.88")	
CBT-76-470	470(18.50")		140(5.51")	
CBT-76-520	520(20.47")		156(6.14")	
CBT-90-178	178(7.00")	9.0(0.35")	45(1.76")	
CBT-90-229	229(9.00")		61(2.40")	
CBT-90-280	280(11.00")		77(3.03")	
CBT-90-329	329(13.00")		93(3.66")	
CBT-90-382	382(15.00")		110(4.33")	
CBT-90-458	458(18.00")		135(5.32")	
CBT-90-530	530(20.87")		155(6.10")	
CBT-90-655	655(25.79")		194(7.64")	
CBT-90-780	780(30.71")		234(9.21")	
CBT-90-815	815(32.00")		247(9.72")	

CBT-xx-xxx-LF
LEADFREE
RoHS Compliant

 煜倫股份有限公司	PART NO. CBT-xx-xxx		RoHS Compliant									
	DWG NO. CBT-xx-xxx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:							
	FILE NO.		DRAWING BY									
	UNIT / mm	SCALE 1:1	PROJECTION 			AREA	REVISIONS	HK	DATE			