


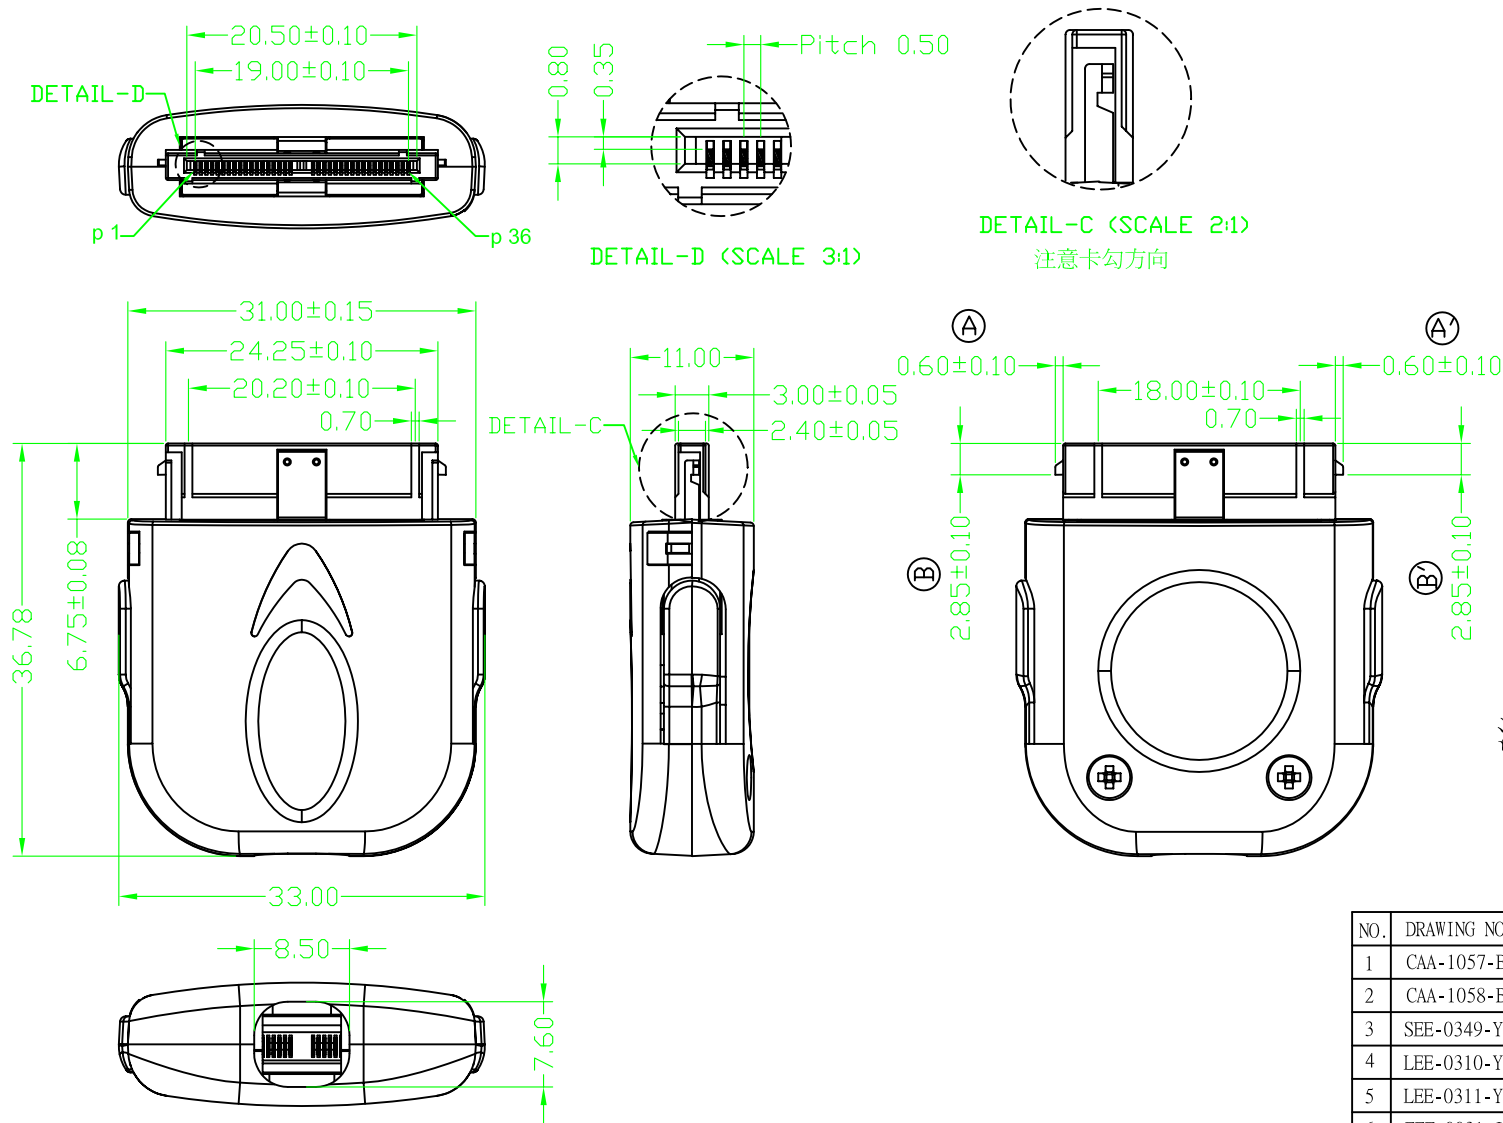

NOTE:

MATERIAL:

UPPER COVER-ABS

BOTTOM COVER-ABS

SHIELD-SUS301/T=0.15mm

HOUSING -PA66+30%G.F.

LATCH-SUS 301/T=0.50mm

TERMINAL-JIS C5210/T=0.20mm

TERMINAL PLATING:

50~80U" Ni UNDER PLATE ALL OVER.

80~120U" Sn IN TAIL AREA.

Min 8U"GOLD PLATED IN CONTACT AREA

ELECTRICAL

CURRENT RATING:0.5A

DIELECTRIC WITHSTANDING VOLTAGE:300VAC

INSULATION RESISTANCE:100MΩ /1000VDC

CONTACT RESISTANCE:80mΩ

ENVIRONMENTAL

OPERATING TEMPERATURE:-10°C TO 60°C

STORAGE TEMPERATURE:-30°C TO 60°C

注: |A-A| ≤ 0.08

|B-B| ≤ 0.10

NO.	DRAWING NO.	NAME	MATERIAL	COLOR	QTY
1	CAA-1057-BKA	DELL X50 36P Upper Cover	ABS	BLACK	1PCS
2	CAA-1058-BKA	DELL X50 36P Bottom Cover	ABS	BLACK	1PCS
3	SEE-0349-Y*A	DELL X50 36P SHIELD	SUS301		2PCS
4	LEE-0310-Y*A	ML 24P LATCH-R	SUS301		1PCS
5	LEE-0311-Y*A	ML 24P LATCH-L	SUS301		1PCS
6	EEF-0031-J*A	TPF2.0X6ABK尖尾螺絲	中碳鋼		2PCS
7	SADL-X50*01M	DELL X50 36P Housing Assembly			1SET

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

CDMA-PA-36-LF

SERIES

LEADFREE

36 WAY

ASSEMBLY

MALE

DESCRIPTION: