


WIRE RANGE mm ²	產品編號 ITEM NO.	MOQ REQUIRED	F	L	C	W	t	COLOR 顏色		
								FRENCH	GERMAN	DIN
26AWG 0.14mm ²	CET-0106-xx		6.00 ±0.40	10.50 ±1.50	0.80 ±0.14	1.90 ±0.20	0.15 ±0.05	BROWN 咖啡色	GREY 灰色	GREY 灰色
	CET-0108-xx		8.00 ±0.40	12.50 ±1.50						
24AWG 0.25mm ²	CET-0206-xx		6.00 ±0.40	10.50 ±1.50	0.80 ±0.14	1.90 ±0.20	0.15 ±0.05	VIOLET 紫色	LIGHT BLUE 淺藍色	YELLOW 黃色
	CET-0208-xx		8.00 ±0.40	12.50 ±1.50						
22AWG 0.34mm ²	CET-0306-xx		6.00 ±0.40	10.50 ±1.50	0.80 ±0.14	1.90 ±0.20	0.15 ±0.05	PINK 粉紅色	TURQUOISE 淺綠藍色	TURQUOISE 淺綠藍色
	CET-0308-xx		8.00 ±0.40	12.50 ±1.50						
	CET-0310-xx		10.00 ±0.40	14.50 ±1.50						
	CET-0312-xx		12.00 ±0.40	16.50 ±1.50						
20AWG 0.5mm ²	CET-0505-xx		5.00 ±0.40	11.00 ±1.50	1.00 ^{+0.14} _{-0.00}	2.60 ±0.20	0.15 ±0.05	WHITE 白色	ORANGE 橘色	WHITE 白色
	CET-0506-xx		6.00 ±0.40	12.00 ±1.50						
	CET-0508-xx		8.00 ±0.40	14.00 ±1.50						
	CET-0510-xx		10.00 ±0.40	16.00 ±1.50						
	CET-0512-xx		12.00 ±0.40	18.00 ±1.50						
18AWG 0.75mm ²	CET-0706-xx		6.00 ±0.40	12.00 ±1.50	1.20 ^{+0.14} _{-0.00}	2.80 ±0.20	0.15 ±0.05	SKY BLUE 天藍色	WHITE 白色	GREY 灰色
	CET-0706L-xx	☆	6.00 ±0.40	12.00 ±1.50		3.00 ±0.20				
	CET-0708-xx		8.00 ±0.40	14.00 ±1.50		2.80 ±0.20				
	CET-0708L-xx	☆	8.00 ±0.40	14.00 ±1.50		3.00 ±0.20				
	CET-0710-xx		10.00 ±0.40	16.00 ±1.50		2.80 ±0.20				
	CET-0710L-xx	☆	10.00 ±0.40	16.00 ±1.50		3.00 ±0.20				
	CET-0712-xx		12.00 ±0.60	18.00 ±1.50		2.80 ±0.20				
	CET-0712L-xx	☆	12.00 ±0.60	18.00 ±1.50		3.00 ±0.20				
	CET-0718-xx		18.00 ±0.60	24.00 ±1.50		2.80 ±0.20				
	CET-0718L-xx	☆	18.00 ±0.60	24.00 ±1.50		3.00 ±0.20				

NOTE:

1. TEMPERATURE RANGE : -40 °C UP TO + 105 °C
2. MAXIMUM ELECTRICAL RATING:600 VOLTS
3. TERMINAL MATERIAL : COPPER TUBE
4. PLATING : ELECTRO TIN PLATED
5. INSULATION MATERIAL : NYLON

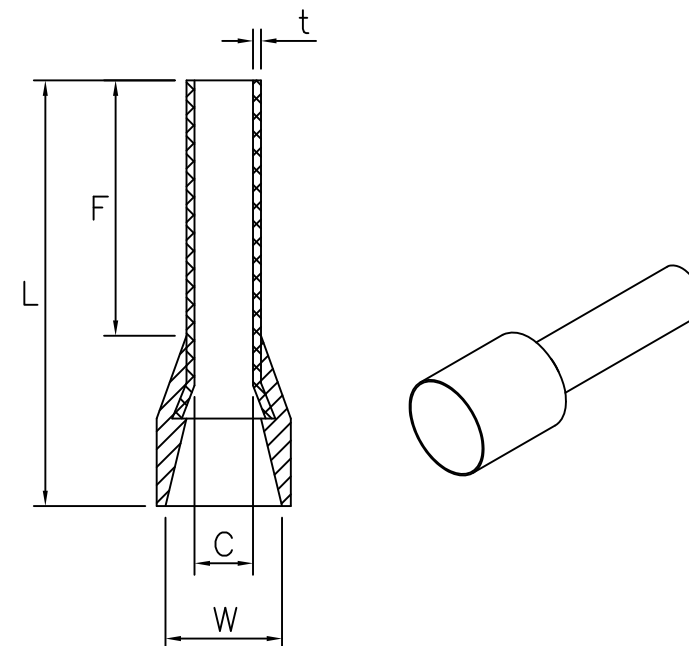

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

CET-xxvy-xx-LF

SERIES

LEADFREE

WIRE RANGE

01:0.14mm²

15:1.5mm²

F LONG

06:6.00

18:18.00

BR:BROWN / GY:GREY / PP:VIOLET

LB:LIGHT BLUE / YL:YELLOW / PK:PINK

LG:TURQUOISE / WH:WHITE / OR:ORANGE


BL:SKY BLUE / RD:RED / BK:BLACK

DESCRIPTION: NYLON INSULATED CORD-END TERMINALS

WIRE RANGE mm ²	產品編號 ITEM NO.	MOQ REQUIRED	F	L	C	W	t	COLOR 顏色		
								FRENCH	GERMAN	DIN
18AWG 1.0mm ²	CET-1006-xx		6.00 ±0.40	12.00 ±1.50	1.40 ^{+0.14} _{-0.00}	3.00 ±0.20	0.15 ±0.05	RED 紅色	YELLOW 黃色	RED 紅色
	CET-1006L-xx	☆	6.00 ±0.40	12.00 ±1.50		3.30 ±0.20				
	CET-1008-xx		8.00 ±0.40	14.00 ±1.50		3.00 ±0.20				
	CET-1008L-xx	☆	8.00 ±0.40	14.00 ±1.50		3.30 ±0.20				
	CET-1010-xx		10.00 ±0.40	16.00 ±1.50		3.00 ±0.20				
	CET-1010L-xx	☆	10.00 ±0.40	16.00 ±1.50		3.30 ±0.20				
	CET-1012-xx		12.00 ±0.60	18.00 ±1.50		3.00 ±0.20				
	CET-1012L-xx	☆	12.00 ±0.60	18.00 ±1.50		3.30 ±0.20				
	CET-1018-xx		18.00 ±0.60	24.00 ±1.50		3.00 ±0.20				
	CET-1018L-xx	☆	18.00 ±0.60	24.00 ±1.50		3.30 ±0.20				
16AWG 1.5mm ²	CET-1506-xx		6.00 ±0.40	12.00 ±1.50	1.70 ^{+0.25} _{-0.00}	3.50 ±0.20	0.15 ±0.05	BLACK 黑色	RED 紅色	BLACK 黑色
	CET-1508-xx		8.00 ±0.40	14.00 ±1.50		3.50 ±0.20				
	CET-1508L-xx	☆	8.00 ±0.40	14.00 ±1.50		3.80 ±0.20				
	CET-1510-xx		10.00 ±0.40	16.00 ±1.50		3.50 ±0.20				
	CET-1510L-xx	☆	10.00 ±0.40	16.00 ±1.50		3.80 ±0.20				
	CET-1512-xx		12.00 ±0.60	18.00 ±1.50		3.50 ±0.20				
	CET-1512L-xx	☆	12.00 ±0.60	18.00 ±1.50		3.80 ±0.20				
	CET-1515-xx		15.00 ±0.60	21.00 ±1.50		3.50 ±0.20				
	CET-1515L-xx	☆	15.00 ±0.60	21.00 ±1.50		3.80 ±0.20				
	CET-1518-xx		18.00 ±0.60	24.00 ±2.00		3.50 ±0.20				
	CET-1518L-xx	☆	18.00 ±0.60	24.00 ±2.00		3.80 ±0.20				

NOTE:

1. TEMPERATURE RANGE : -40 °C UP TO + 105 °C
2. MAXIMUM ELECTRICAL RATING:600 VOLTS
3. TERMINAL MATERIAL : COPPER TUBE
4. PLATING : ELECTRO TIN PLATED
5. INSULATION MATERIAL : NYLON

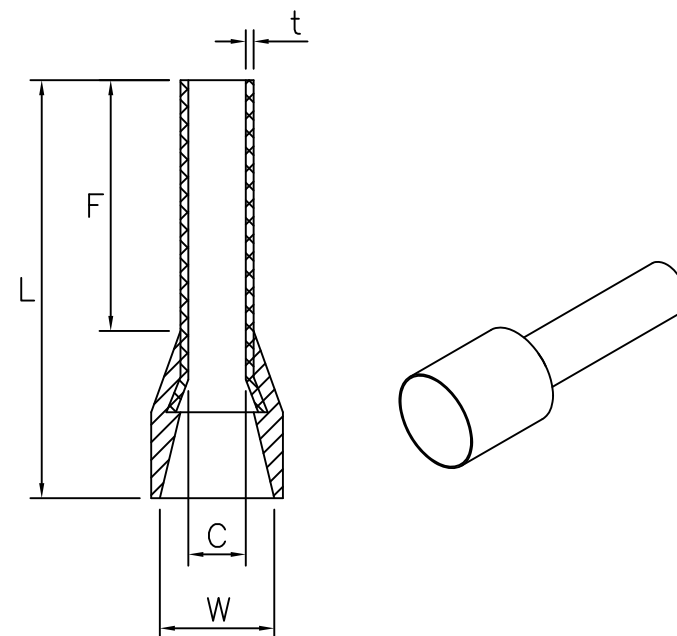

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

CET-xxvy-xx-LF

SERIES

LEADFREE

WIRE RANGE
01:0.14mm²
15:1.5mm²

F LONG
06:6.00
18:18.00

BR:BROWN / GY:GREY / PP:VIOLET
LB:LIGHT BLUE / YL:YELLOW / PK:PINK
LG:TURQUOISE / WH:WHITE / OR:ORANGE
BL:SKY BLUE / RD:RED / BK:BLACK

DESCRIPTION: NYLON INSULATED CORD-END TERMINALS