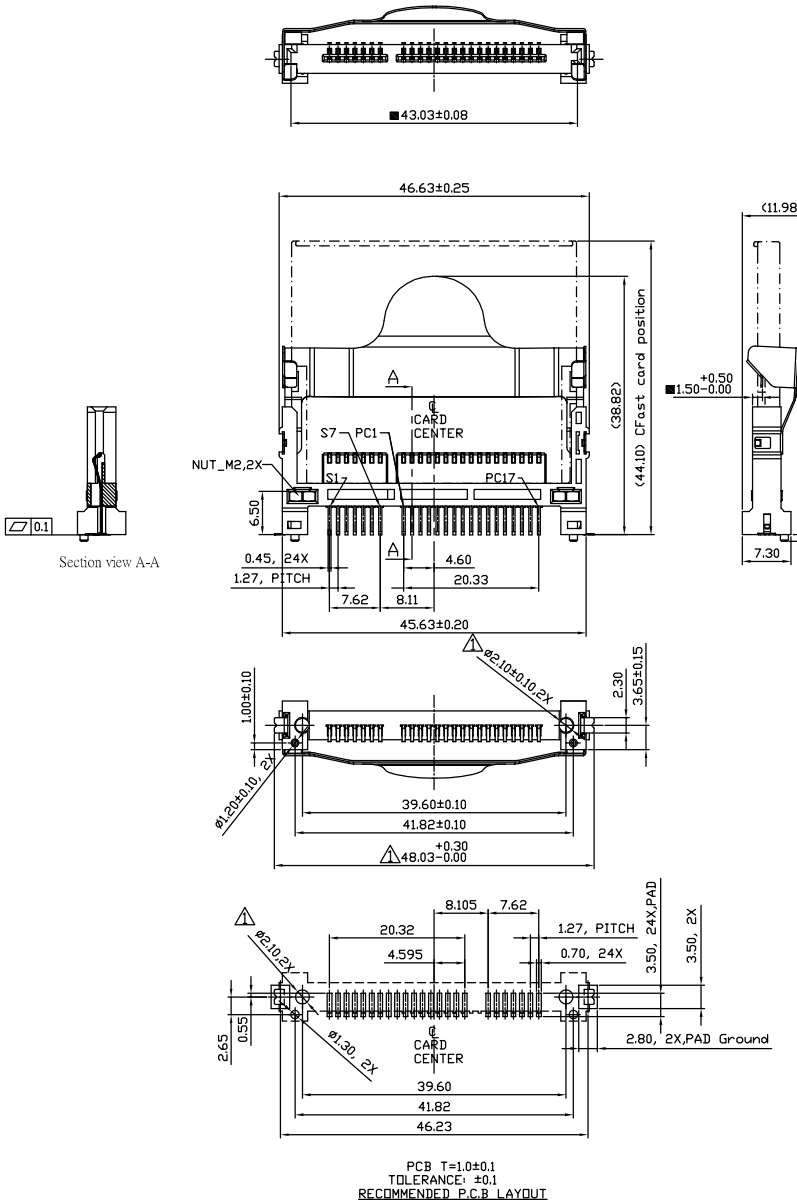

NOTES: 1. MATERIAL:

1-1 Housing： Engineering plastic，LCP with G.F reinforced，black per UL 94V-0 rate.

1-2 Terminal： Phosphor Bronze，per JIS 5210 ，0.2t

1-3 Spring : Stainless steel sheet SUS301 0.25t.

2. PLATING:

2-1 CONTACTS: 0.762 μm (30 μ") gold plating in contact area.and 2.54 μm (100 μ") min. matte Tin in soldering zone, over entire contact underplated with1.27 μm (50 μ") min. Nickel over all.

2-2 Solder zone: 2.54 μm (100 μ") matte Tin, 1.27 μm (50 μ") min. Nickel underplating over all.

3. RoHS compliant produsts.

4. OPERATING TEMPERATURE: -40˚C~+85˚C

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
		.XX ±
		.XXX ±
DATE		ANG ±
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

CFA-PV41BE001LM-24-LF

- SERIES
- MALE
- 180°SMT
- POST TO POST 41.82mm
- EAR
- B TYPE
- NORMAL
- METAL LOCK
- 24WAY
- LEADFREE

DESCRIPTION: Cfast host_Stand Off with Lock