


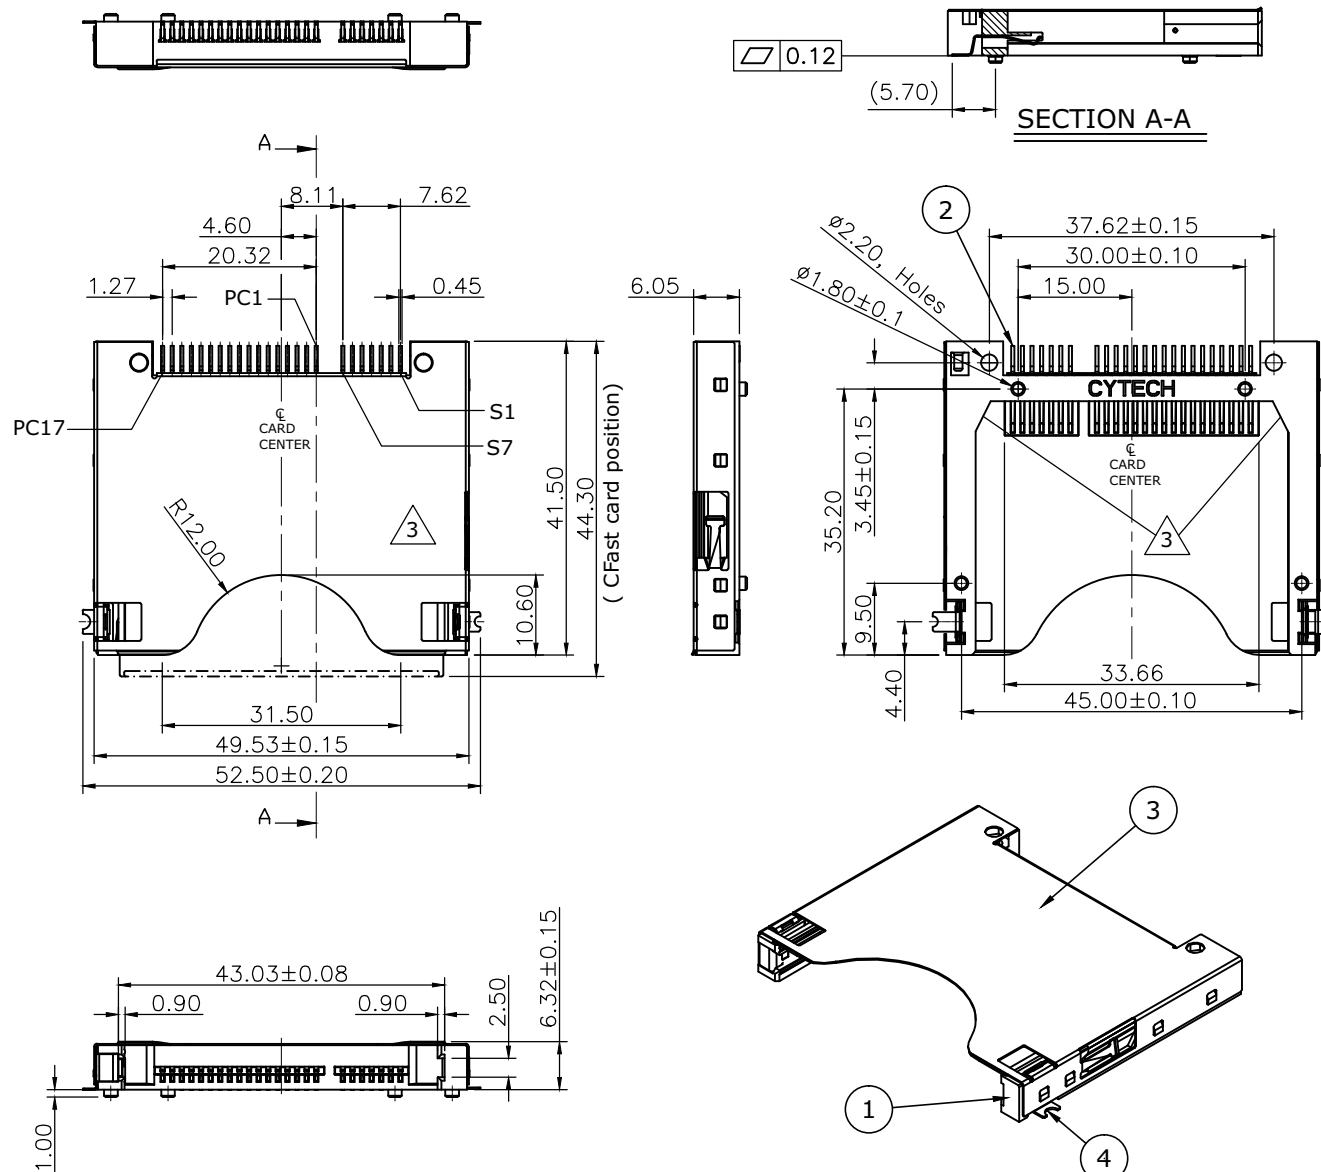

SPECIFICATION:

1. ELECTRICAL

- 1.1 Current Rating: 1.5A
- 1.2 Voltage Rating: 100V AC/DC
- 1.3 Contact Resistance: 30
- 1.4 Insulation Resistance: 1000M
- 1.5 Dielectric Withstanding Voltage: 500VDC

2. MECHANICAL

- 2.1 Durability: 10000 Cycle
- 2.2 Insertion Force: 28.8N max.
- 2.3 Extraction Force: 3.7~24.5N max.

3. ENVIRONMENTAL

- 3.1 Operating temperature range: -40°C~+85°C
- 3.2 Storage temperature range: -40°C~+85°C

4. SOLDER ABILITY

- 4.1 Recommended IR Reflow Temperature: 260°C

4	Hold down	Brass C2680, 0.2t, Tin Plating
3	Shell	Stainless Steel SUS304, 0.2T
2	Contact	Phosphor Bronze C5210, 0.2t, 10u" Gold
1	Housing	LCP UL94V-0 Blcak
NO.	PART NAME	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±


PPOJECTION

照片框

ORDER INFORMATION

CFA-PW30CE201-24-LF
SERIES | T | L | LEAD FREE
MALE | 24WAY | NORMAL
90°SMT | TYPE 2
POST TO POST 30.0mm | EAR
C TYPE

DESCRIPTION: CFAST HOST CONNECTOR MANU TYPE II.

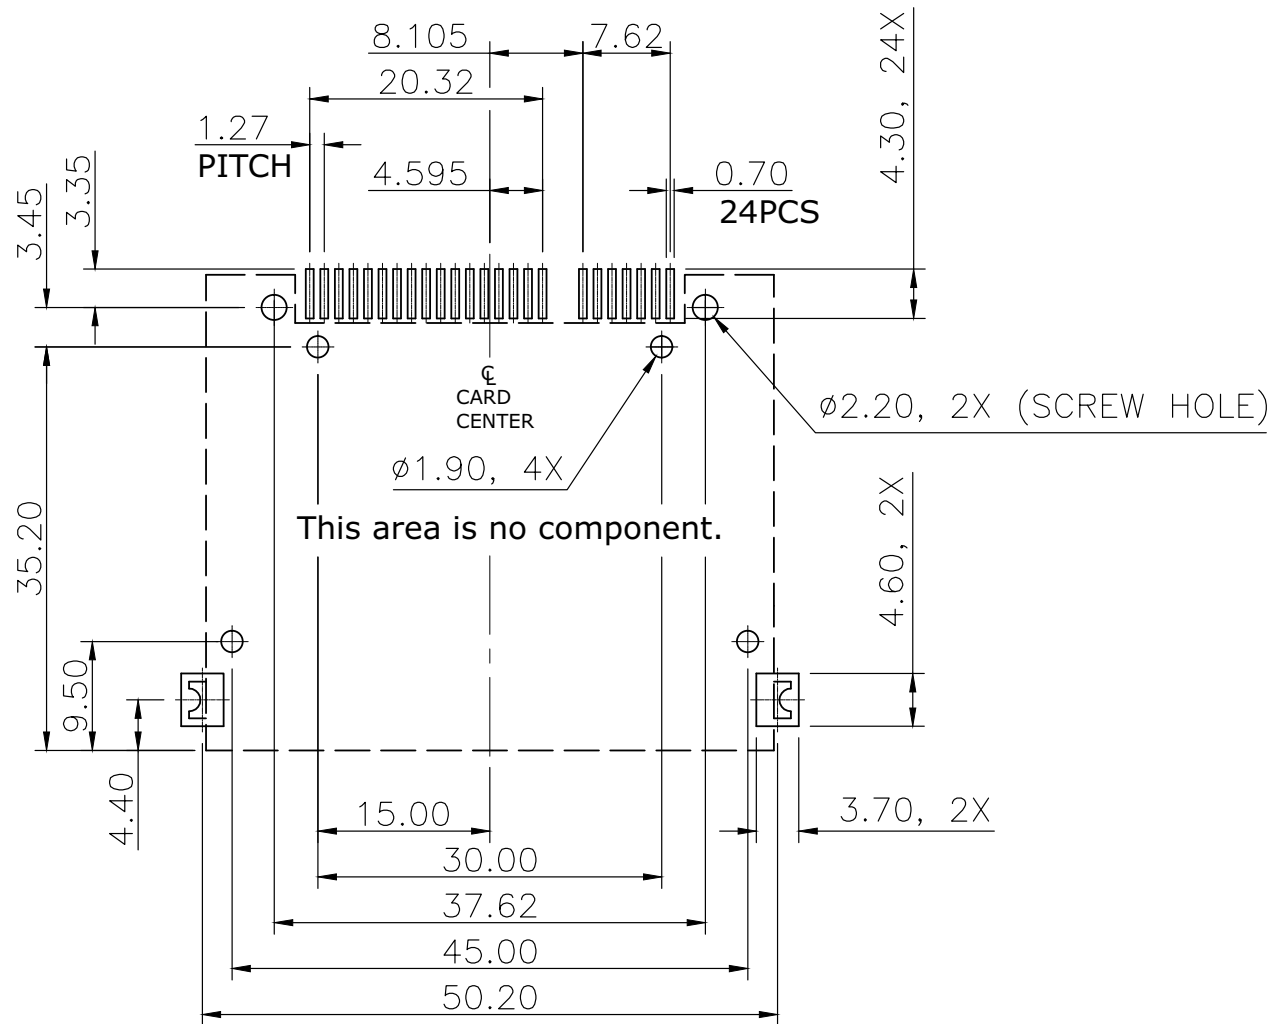

RECOMMENDED LAYOUT (TOP VIEW)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

CFA-PW30CE201-24-LF

SERIES | | | | | LEAD FREE

MALE | | | | | 24WAY

90°SMT | | | | | NORMAL

POST TO POST 30.0mm | | | | | TYPE 2

| | | | | EAR

| | | | | C TYPE

DESCRIPTION: CFAST HOST CONNECTOR MANU TYPE II.