


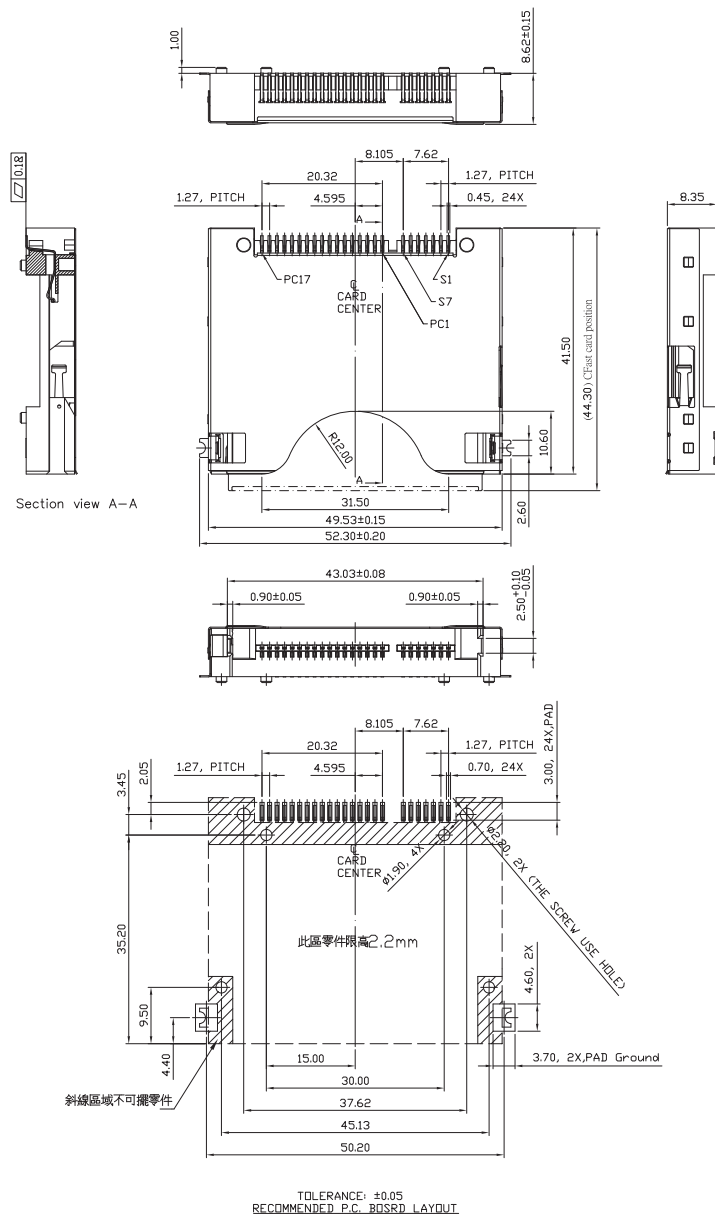

NOTES: 1. MATERIAL:


- 1-1 Housing : Engineering plastic , LCP with G.F reinforced , black per UL 94V-0 rate.
- 1-2 Terminal : Phosphor Bronze , per JIS 5210 , 0.2t
- 1-3 Metal cover : Stainless steel sheet SUS304 0.2t.

2. PLATING:

- 2-1 CONTACTS: 0.25 μ m (10 μ ") gold planting in contact area, and underplated with 1.27 μ m (50 μ ") min. Nickel over all.
- 2-2 Solder zone: 2.54 μ m (100 μ ") matte Tin 1.27 μ m (50 μ ") min. Nickel underplating over all.

3. RoHS compliant products.

4. OPERATING TEMPERATURE: -40°C~+85°C

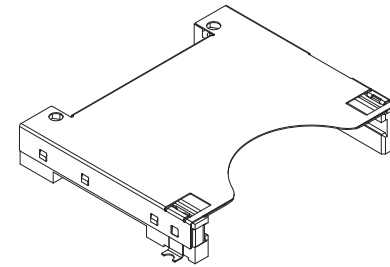

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ±

CHECKED BY GENIUS

X, ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE


.XXX ±

ANG ±

SIZE A4

PPOJECTION

ORDER INFORMATION

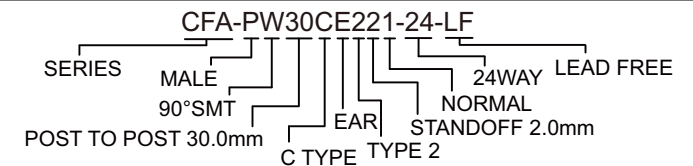

DESCRIPTION: CFAST HOST CONNECTOR MANU TYPE II, 8.35H

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com