

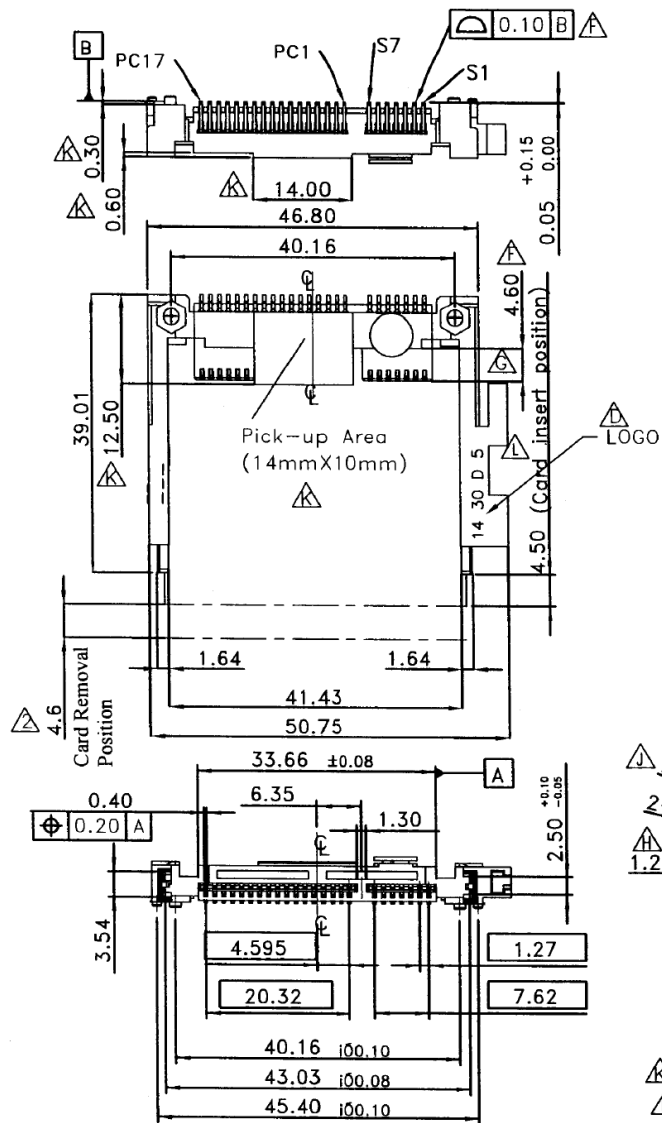


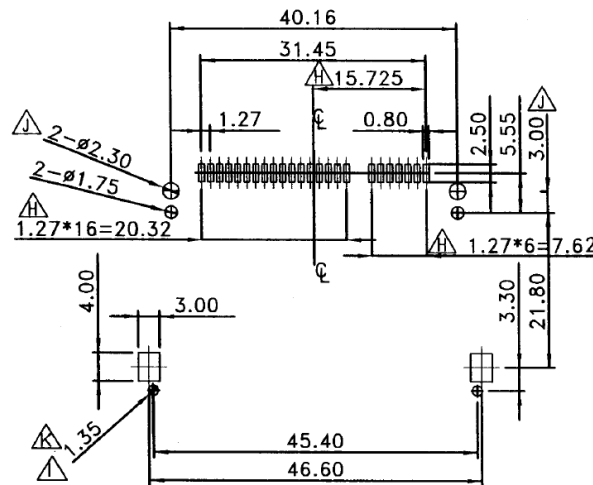

Stand-off Height	DIM-X
Stand-off 0	5.7mm
Stand-off 2.0	7.7mm

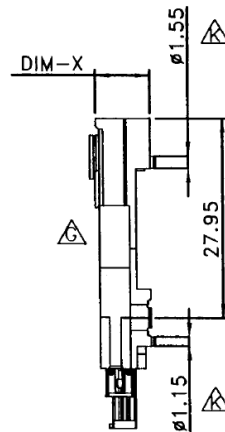

Recommended P.C.B LAYOUT
Tolerance : +/-0.05mm

SPECIFICATION

MATERIAL

Insulator: Thermal Plastic ,UL94V-0

Contacts: Copper Alloy


Shell: Steel

CONTACT PLATING

Underplate: 50u"~100u" Nickel

Contact area: 15u" Selective gold

Solder tails area: 100u"~200u" Tin (Lead Free)

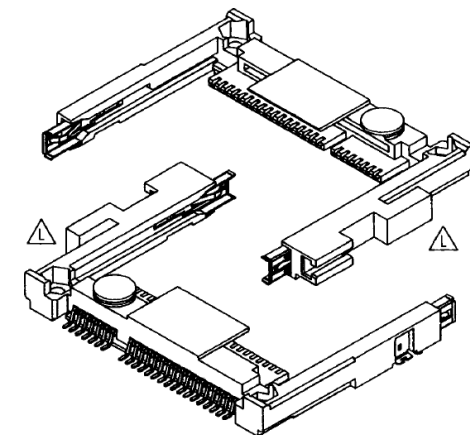

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.20

UNIT / mm

SCALE 1 : 1

.XXX ±

DATE

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

CFA-PW40CE1x1-24-LF

SERIES MALE 90°SMT POST TO POST 40.16mm C TYPE TYPE 1 24WAY NORMAL 0:STANDOFF 0.0mm 2:STANDOFF 2.0mm LEAD FREE

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com