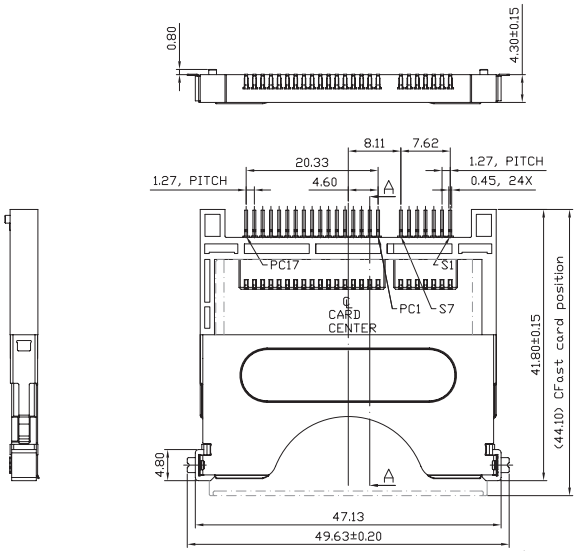



Section view A-A

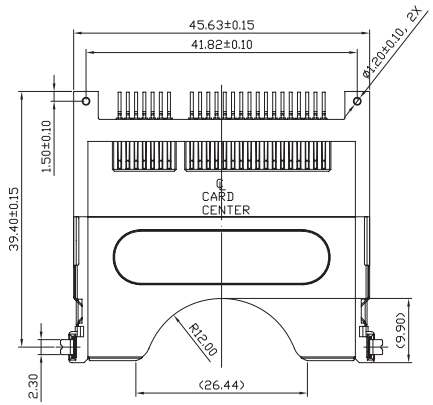

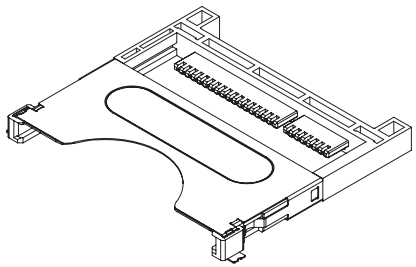

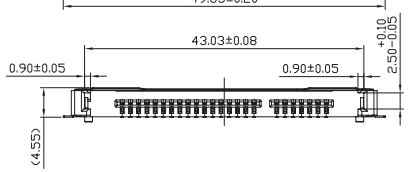

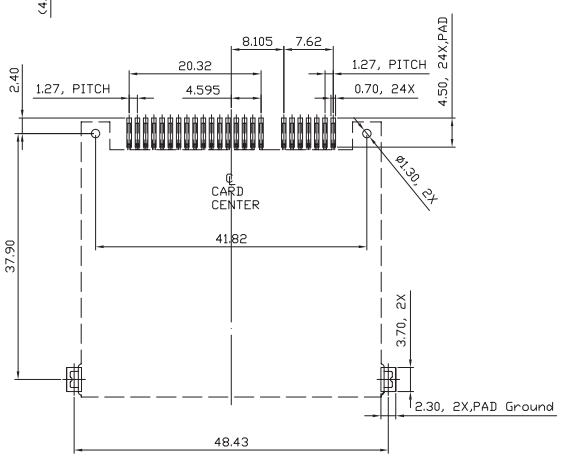

TOLERANCE: ±0.05
RECOMMENDED P.C.B LAYOUT

NOTES:

1. MATERIAL:
   - 1-1 Housing： Engineering plastic，LCP with G.F reinforced，black per UL 94V-0 rate.
   - 1-2 Terminal： Phosphor Bronze，per JIS 5210 ，0.2t
   - 1-3 Metal cover：SUS304 0.2t.
2. PLATING:
   - 2-1 CONTACTS: 0.25 μm (10 μ") gold plating in contact area,and underplated with1.27 μm (50 μ") min. Nickel over all.
   - 2-2 Solder zone: 2.54 μm (100 μ") matte Tin, 1.27 μm (50 μ") min. Nickel underplating over all.
3. RoHS compliant produsts.

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
		.XX ±
DATE		.XXX ±
		ANG ±
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

CFA-PW41AE001L-24-LF

- SERIES
- MALE
- 90°SMT
- POST TO POST 41.82mm
- EAR
- A TYPE
- LOCK
- NORMAL
- 24WAY
- LEADFREE

DESCRIPTION: Cfast host_4.3H簡易型（長腳）