


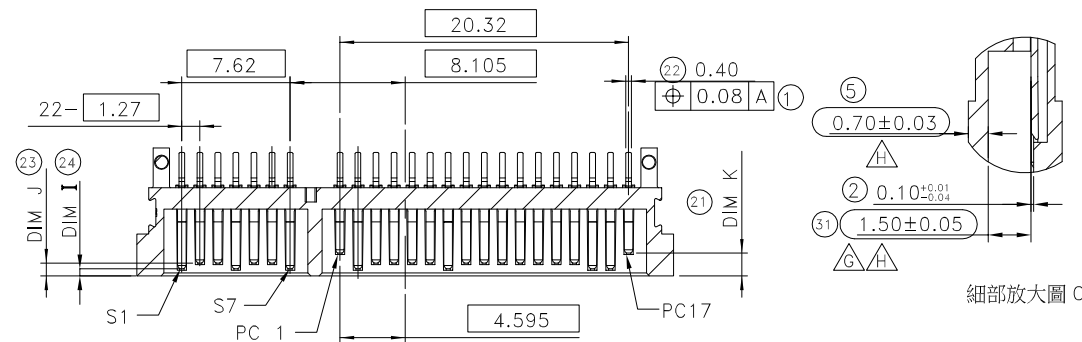
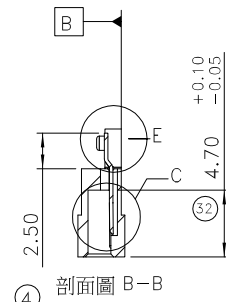


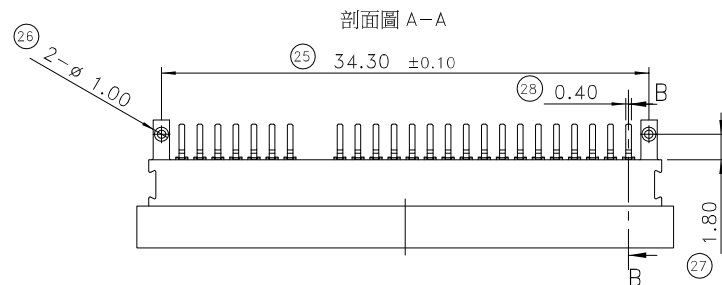

細部放大圖 C

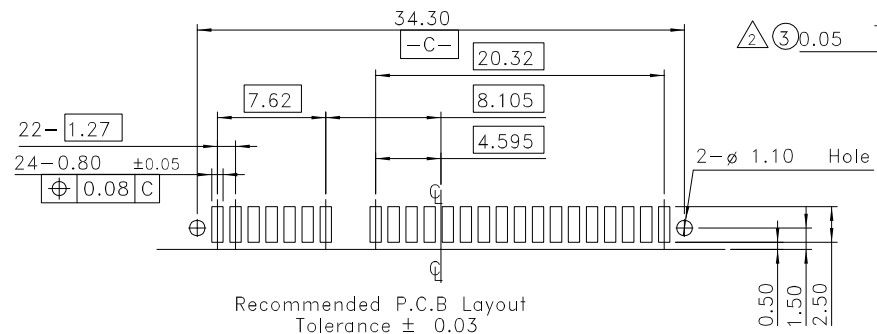

剖面圖 B-B

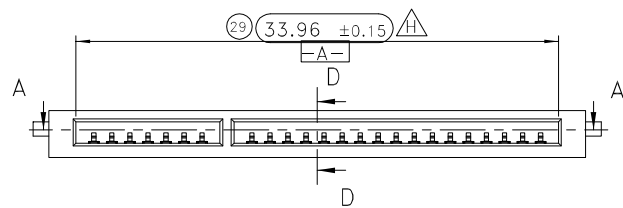


Recommended P.C.B Layout
Tolerance ± 0.03


細部放大圖 E

SPECIFICATION
MATERIAL
Insulator: Thermoplastic, rated UL94V-0
Contacts: Copper Alloy
Shell: Stainless
CONTACT PLATING
Underplate: 50u"~100u" Nickel
Contact area: 15~30u" Selective gold
Solder tails area: 100u"~200u" Tin/Lead Free

- △ CRITICAL-TO-FUNCTION (CTF) DIMENSIONS SHALL BE PLACED WITHIN AN OVAL AND SHALL BE MANUFACTURED WITH A CPK OF 1.33.
- △ REMAINING DIMENSIONS ARE STANDARD DIMENSIONS AND ARE TO MEET TOLERANCES AS SPECIFIED IN THE TOLERANCE BLOCK.



DIM #	PIN#
DIM I	0.5±0.1 S1,S4,S7,PC2,PC7,PC15,PC16
DIM J	0.9±0.1 S2,S3,S5,PC3~PC6,PC8~PC14
DIM K	1.6±0.1 PC1,PC17

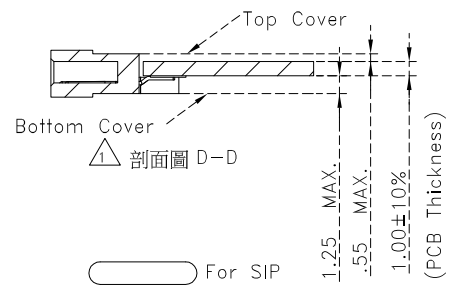

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X. ± 0.30

.XX. ± 0.20

.XXX. $\pm$

ANG $\pm 5^\circ$

PPOJECTION

照片框

ORDER INFORMATION

CFA-SWA02P11-24-LF
SERIES
FEMALE
LEADFREE
24WAY
POST HIGH 1.15mm
OFFSET 0.2mm
A TYPE
90°SMT

DESCRIPTION: CFast Card Conn.