

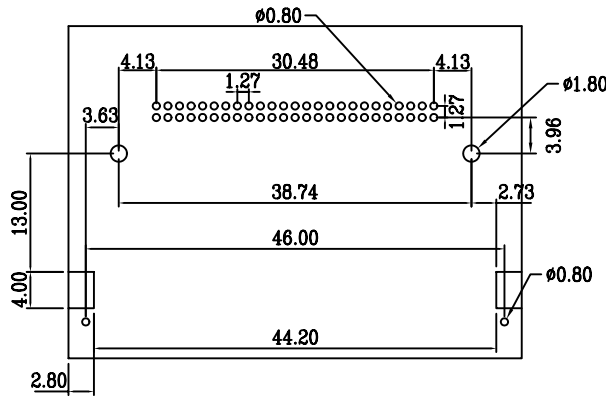
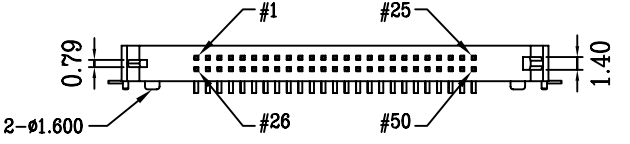
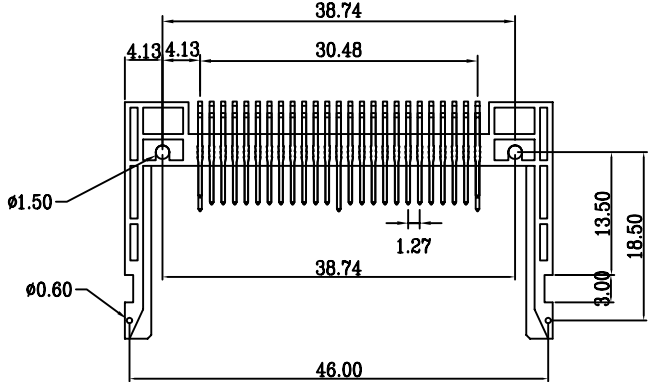

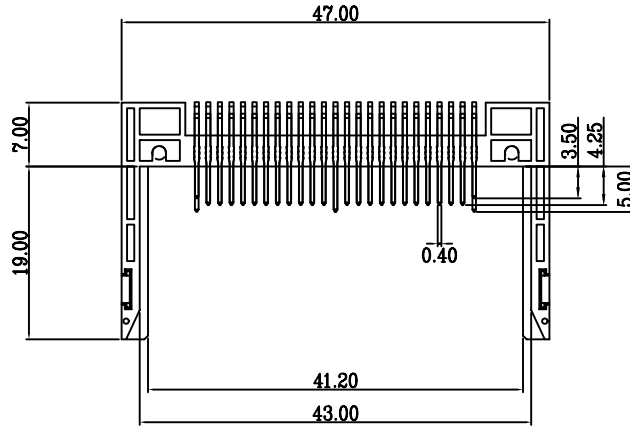


1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

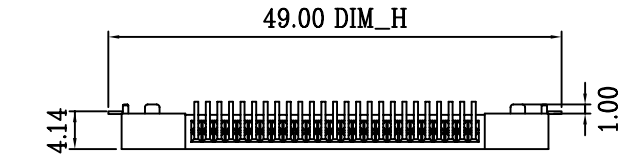

POWER	5.00mm	1,13,38,50
GENERAL	4.25mm	all other pins
DETECT	3.50mm	25,26
Pin type	Interface Dim. L	Pin No.

NOTES
MATERIAL
Insulator: Glass Reinforced LCP UL94V-0
Contacts: Brass
Mount ear: Brass;Tin/Lead plated overall
CONTACT PLATING
Contact area: Gold flash plating over 40u" Nickel
Solder tail area:100u" Tin/Lead plating over 40u" Nickel



煜倫有限公司

PART NO. CFC-PRX-50								
DWG NO. CFC-PRX-50		APPROVED BY CY	TOLERANCES ARE X ± 0.35 XX ± 0.25 XXX ± 0.05 AWG	DESCRIP TION:	COMPA FLASH CARD 50P DIP			
FILE NO.		DRAWING BY						
UNIT / mm	SCALE 1 : 1	PROJECTION 		AREA	REVISIONS	HK	DATE	