

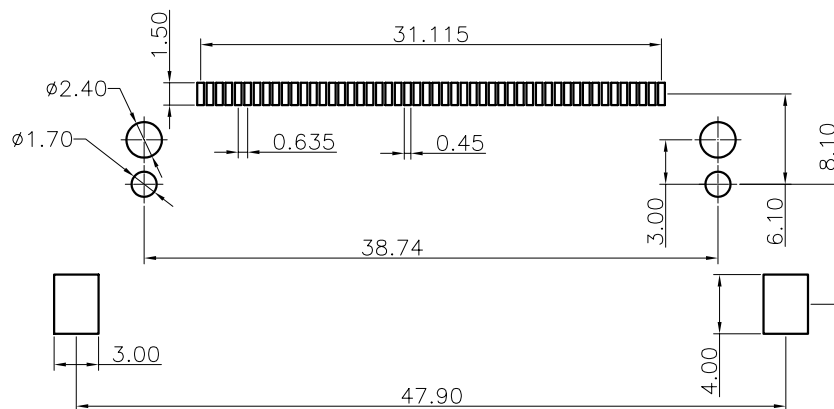
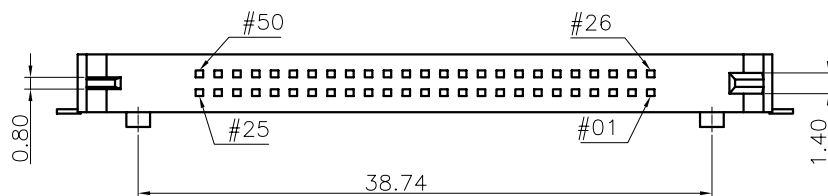
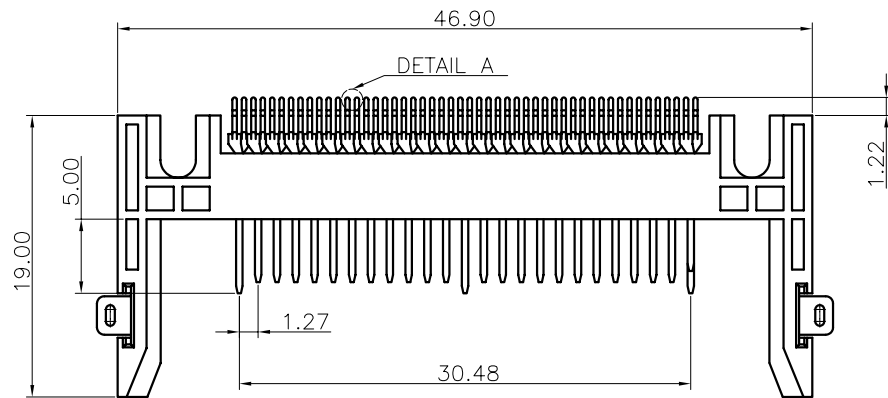




TOP VIEW
PCB LAYOUT RECOMMENDED

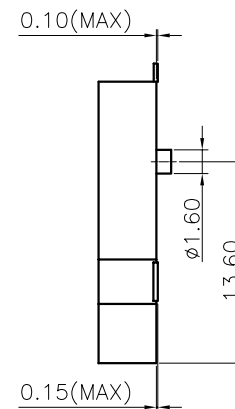

DETAIL A

PIN NUMBER	±0.10
25,26	3.50
ALL OTHER PINS	4.25
1,13,38,50	5.00

CF Card Connector, Type 4
With Screw Hole
Reverse On Board
Without Extractor
Physical:

Housing: LCP, UL 94V-0

Contact: Copper Alloy

Specifications:

Voltage Current Rating: 1A. 30V AC

Insulation Resistance: 1000M ohm min

Contact Resistance: 30m ohm max

Dielectric Withstanding Voltage:

AC 500V For 1 Minute

Temperature Rating: -55°C To +105°C

IR Reflow Soldering Temperature:

Lead Part: 220°C, 5Sec

RoHS Part: 260°C, 5Sec

CFC-PW38BE002-50-LF
LEADFREE
RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. CFC-PW38BE002-50

DWG NO. CFC-PW38BE002-50

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司