
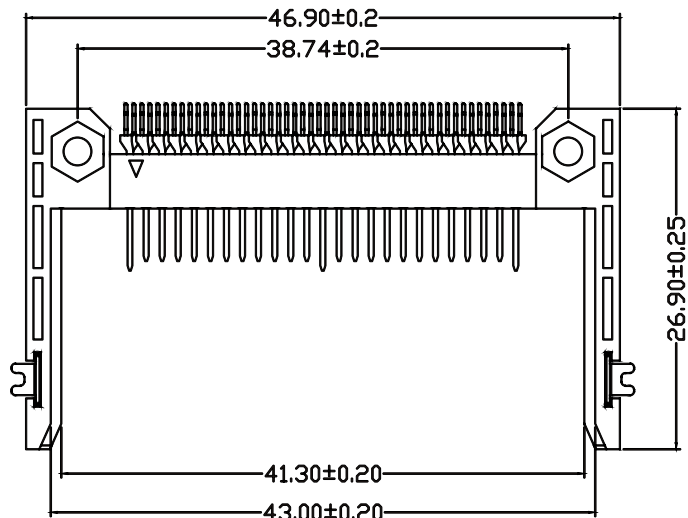


Recommended P.C.B Layout(Top Side)

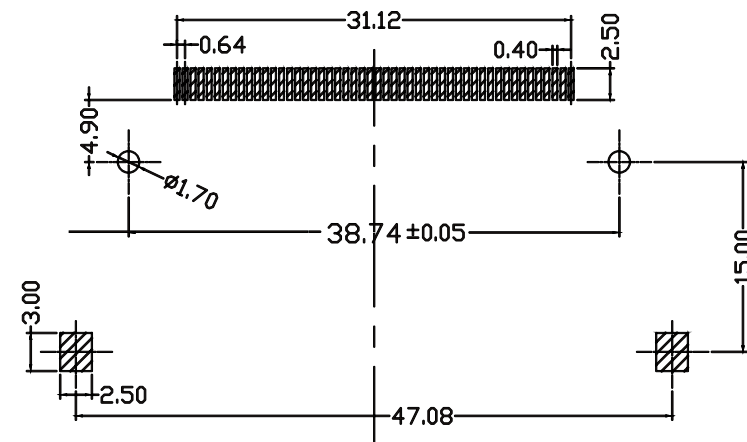

NOTES:
Current Rating: 0.5A AC,DC
Temperature Range: -20°C~+60°C
Contact Resistance: 40mΩ max
Insulation Resistance: 1000MΩ min
Withstanding Voltage: 500V AC/minute
Material: LCP UL 94V-0

		DIM.A	DIM.B
1	CF CARD 板上臂長26.9	1.35	0.70
2	CF CARD 板下臂長26.9	0.70	1.35

CFC-PW38BE00x-50-LF
1:STD 2:RVS LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. CFC-PW38BE00x-50

DWG NO. CFC-PW38BE00x-50

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X.±
.X±
.XX±
.XXX±
ANG

DESCRIPTION:

AREA

REVISIONS

DATE

煜倫股份有限公司