
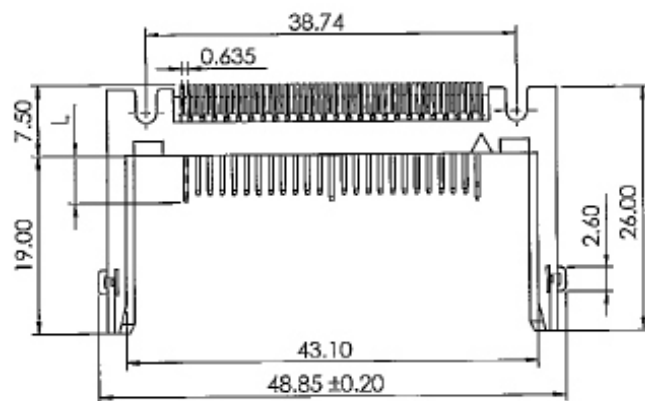
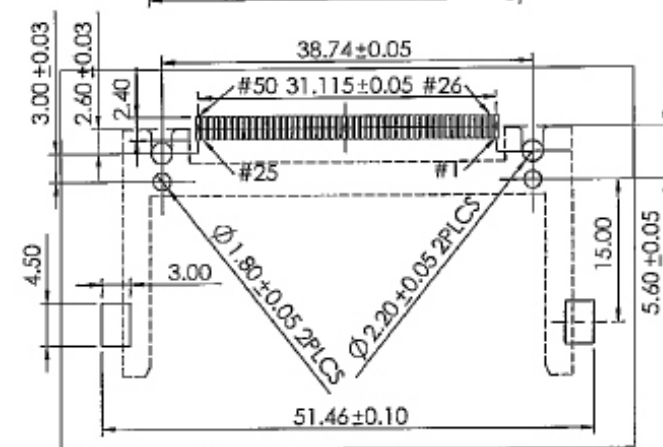
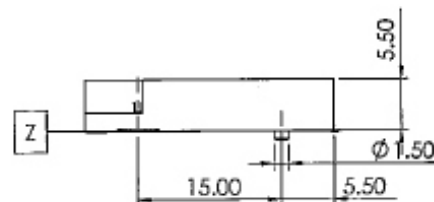


NOTES:
 1. MATERIAL :
 INSULATOR : HIGH TEMPERATURE
 THERMOPLASTIC
 FLAMMABILITY RATING : UL94V-0
 COLOR : IVORY
 CONTACT : COPPER ALLOY
 GROUND MOUNT EAR : COPPER ALLOY

2. PLATING :
 CONTACT AREA : GOLD
 UNDER PLATING : NICKEL OVERALL
 SOLDER TAIL AREA : TIN/LEAD
 GROUND MOUNT EAR AREA : TIN/LEAD

3. SOLDER TAIL TO BE WITHIN 0.05 UPWARD
 AND 0.2 DOWNWARD FROM Z-DATUM PLACE,
 AND COPLANARITY OF SOLDER TAILS TO BE
 WITHIN 0.10

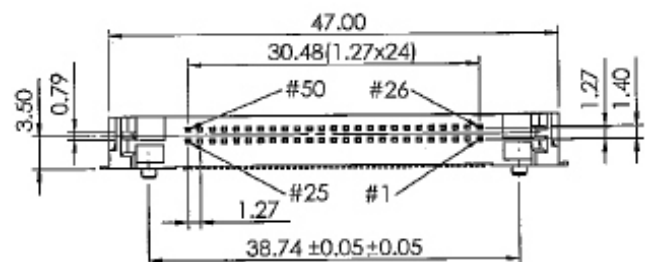

Recommended P.C.B Pattern

PIN NUMBER	DIM. L ±0.10
25, 26	3.50
ALL OTHER PINS	4.25
1, 13, 38, 50	5.00

MORETHANALL
 CONNECTORS
 ASSEMBLIES

煜倫股份有限公司

PART NO. CFC-PW38BE102-50

DWG NO. CFC-PW38BE102-50

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE