


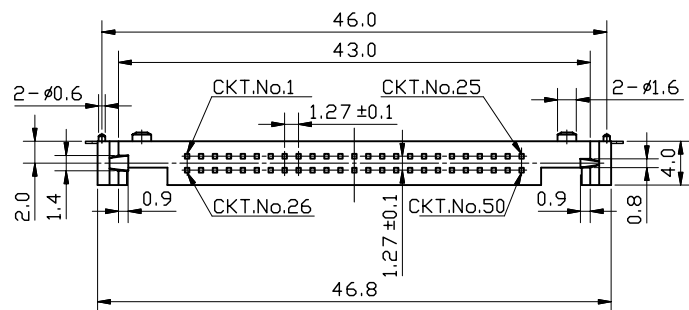


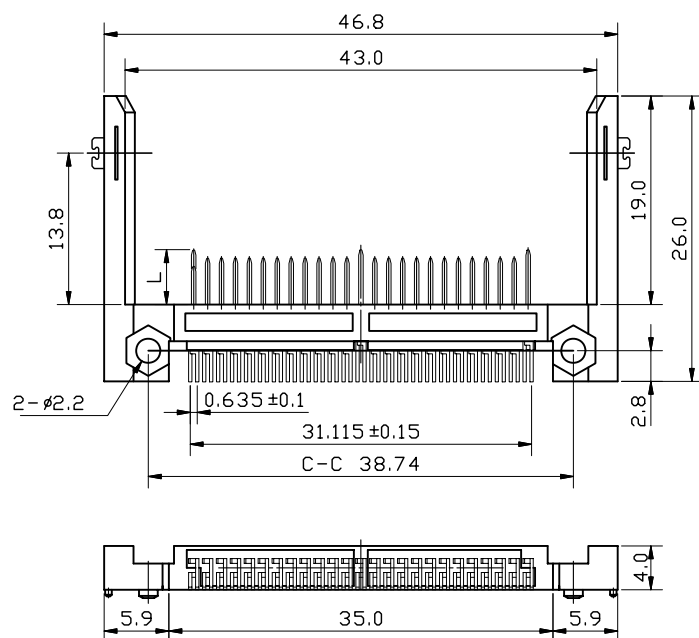

NOTES:
 MATERIAL
 Insulator:Glass Reinforced LCP UL94V-0
 Contacts:Brass Alloy
 Mount ear:Brass ; Tin plated overall
 CONTACT PLATING
 Contact area: Gold plating over 40u" Nickel
 Solder tail area:100u" tin plating over 40u" Nickel

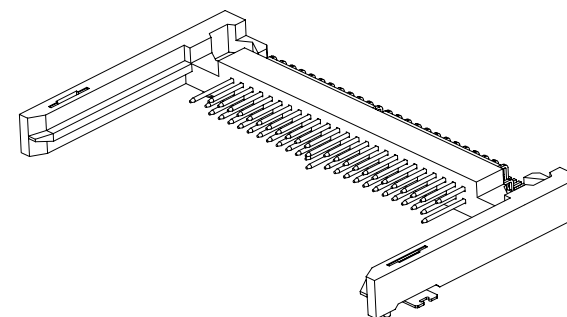

Circuit No.	Dimension L mm
1, 13, 38, 50,	5.0±0.1
2 to 12, 14 to 24, 27 to 37, 39 to 49,	4.25±0.1
25, 26,	3.5±0.1

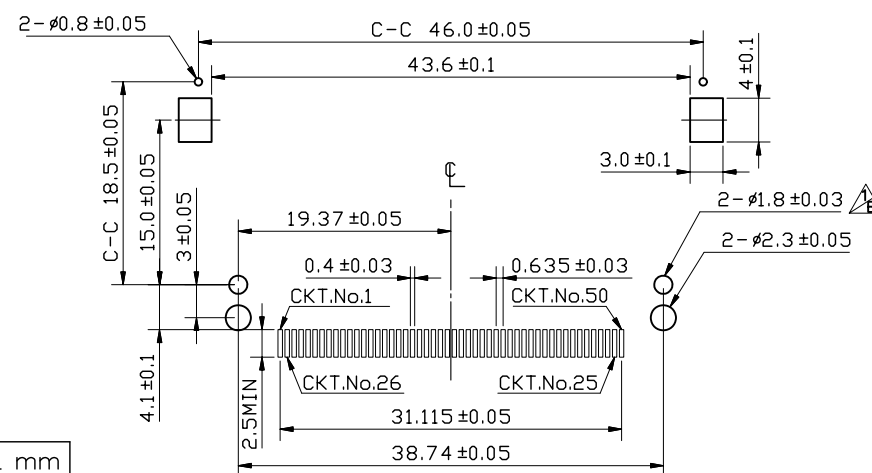

RECOMMENDED P.C.B. LAYOUT

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

CFC-PW38CE001-50-LF

SERIES LEADFREE
 50WAY
 MALE EAR
 90°SMT C TYPE
 POST TO POST 38.74mm

DESCRIPTION: CF CARD HEADER (LFS) SMT 50P TYPE I (BR)