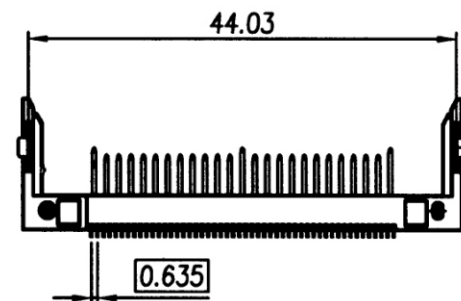

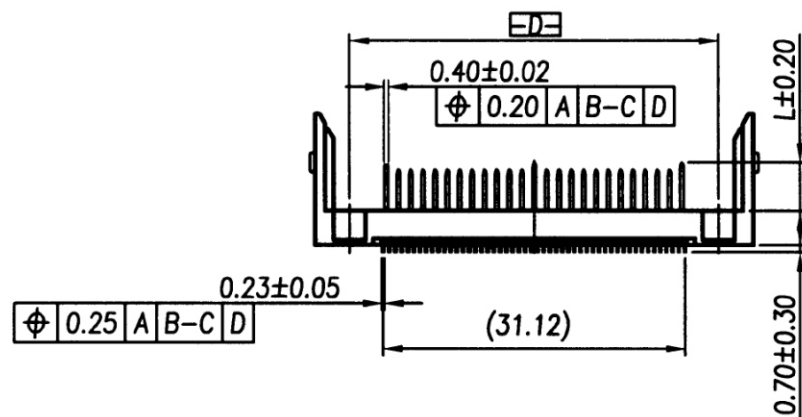
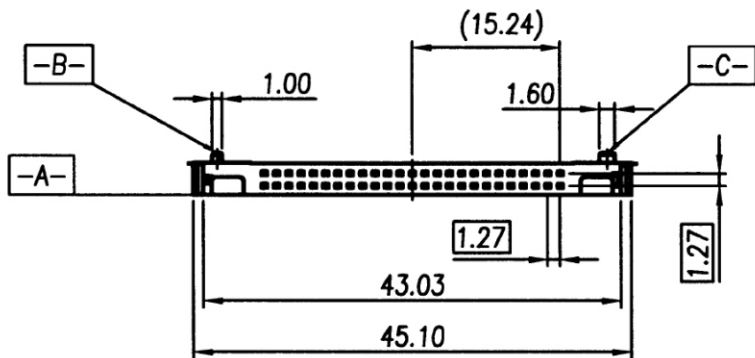


CFC-PW40AX001-50-LF
LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. CFC-PW40AX001-50

DWG NO. CFC-PW40AX001-50

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION:


AREA

REVISIONS



HK

DATE

煜倫股份有限公司

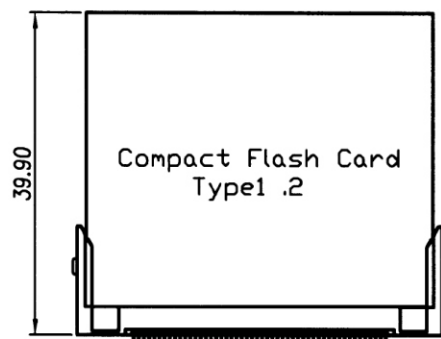

CARD INSERTION

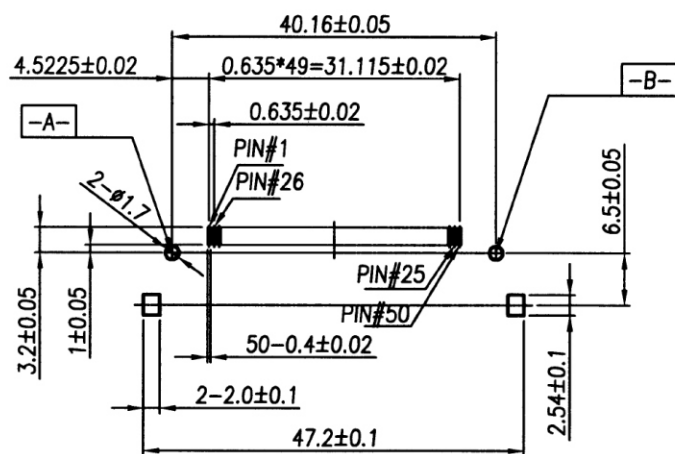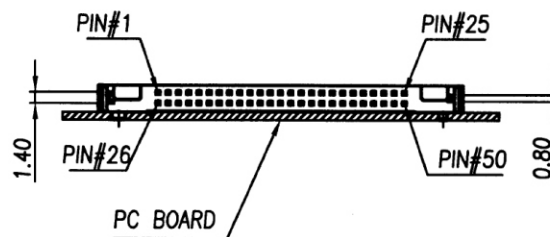

P.C.B Layout

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0

CONTACT : Copper Alloys

VOLTAGE RATING : 100VAC

CURRENT RATING : 0.5A

CONTACT RESISTANCE:40 m Ohm max.

INSULATION RESISTANCE:1000M Ohm max.

DIELECTRIC STRENGTH : 500VAC/1min

OPERATION TEMPERATURE : -40°C~85°C

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. **CFC-PW40AX001-50**

DWG NO. **CFC-PW40AX001-50**

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE