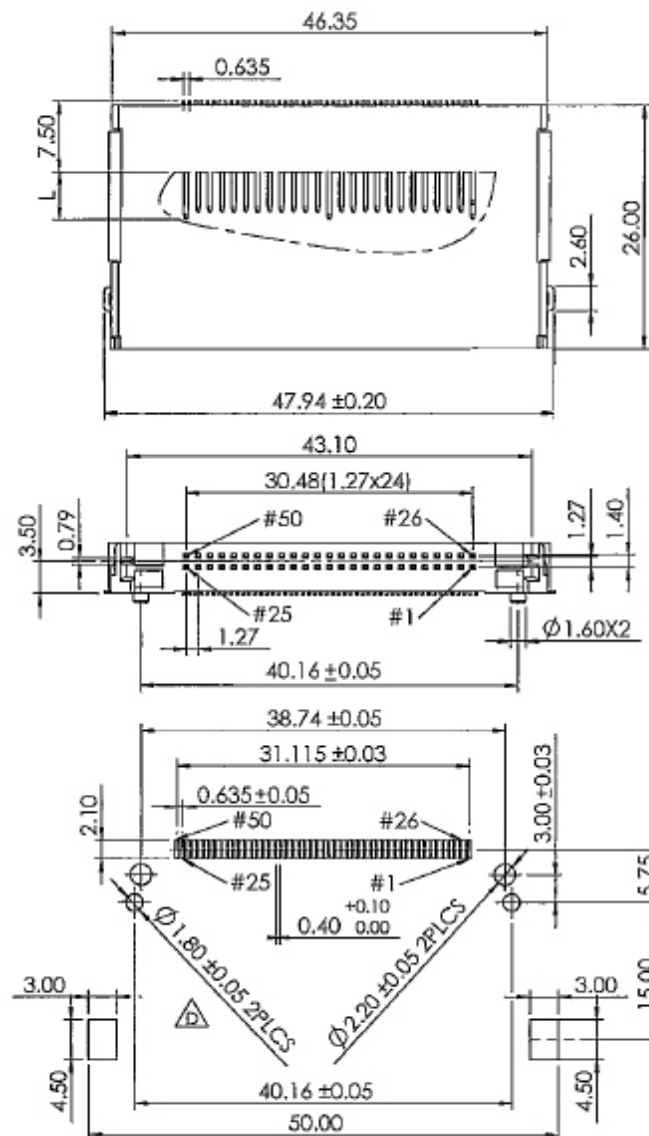


NOTES:

1. MATERIAL :

INSULATOR : HIGH TEMPERATURE
THERMOPLASTIC
FLAMMABILITY RATING : UL94V-0
COLOR : IVORY
CONTACT : COPPER ALLOY
GROUND MOUNT EAR : COPPER ALLOY

2. PLATING :

CONTACT AREA : GOLD
UNDER PLATING : NICKEL OVERALL
SOLDER TAIL AREA : TIN/LEAD
GROUND MOUNT EAR AREA : TIN/LEAD

3. SOLDER TAIL TO BE WITHIN 0.05 UPWARD
AND 0.2 DOWNWARD FROM Z-DATUM PLACE,
AND COPLANARITY OF SOLDER TAILS TO BE
WITHIN 0.12mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
X. ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

CFC-PW40BE102-50-LF
SERIES T T T T T LEADFREE
MALE T T T T T 50WAY
90°SMT T T T T T RVS
POST TO POST 40.16mm TYPE 1
EAR
B TYPE

DESCRIPTION: