

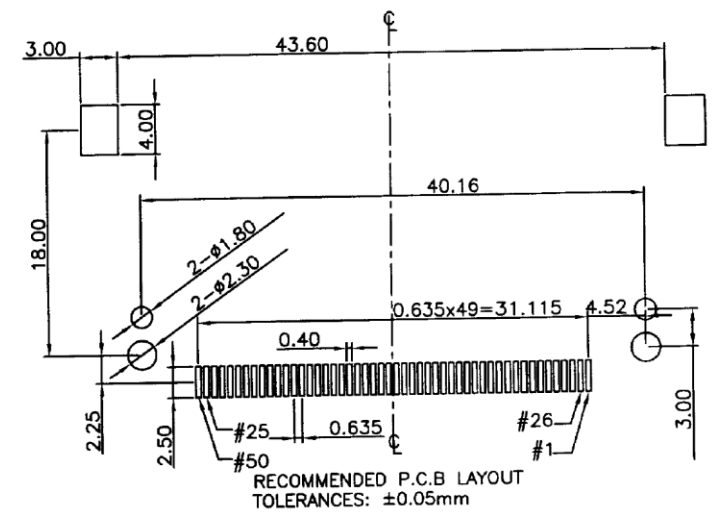


SPECIFICATION
MATERIAL
 Insulator: Thermal Plastic UL94V-0
 Contacts: Copper Alloy
 Pivot Shell: Stainless Steel
 Mount Ear: Copper Alloy
CONTACT PLATING
 Underplate: 50u"~100u" Nickel
 Contact Area: 1u"~30u" Selective Gold
 Solder Tails Area: 100u"~200u" Tin/Lead(Brighten Tin)or
 100u"~200u" Tin/Lead Free(Brighten Tin/Matte Tin)

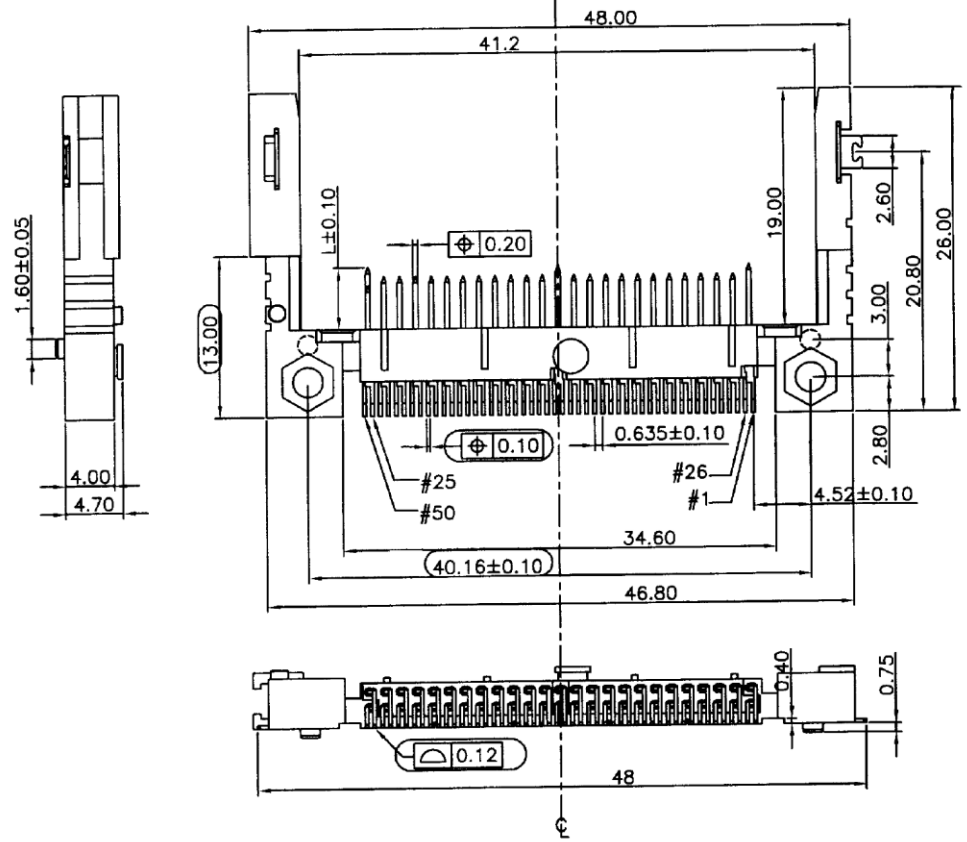

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
煜倫股份有限公司
 www.morethanall.com

DRAWING BY CY		X. ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PJECTION	



ORDER INFORMATION

CFC-PW40BE201-50-LF
 SERIES | | | | | LEADFREE
 MALE | | | | | 50WAY
 90°SMT | | | | | NORMAL
 POST TO POST 40.16mm | | | | | TYPE 2
 EAR
 B TYPE

DESCRIPTION: