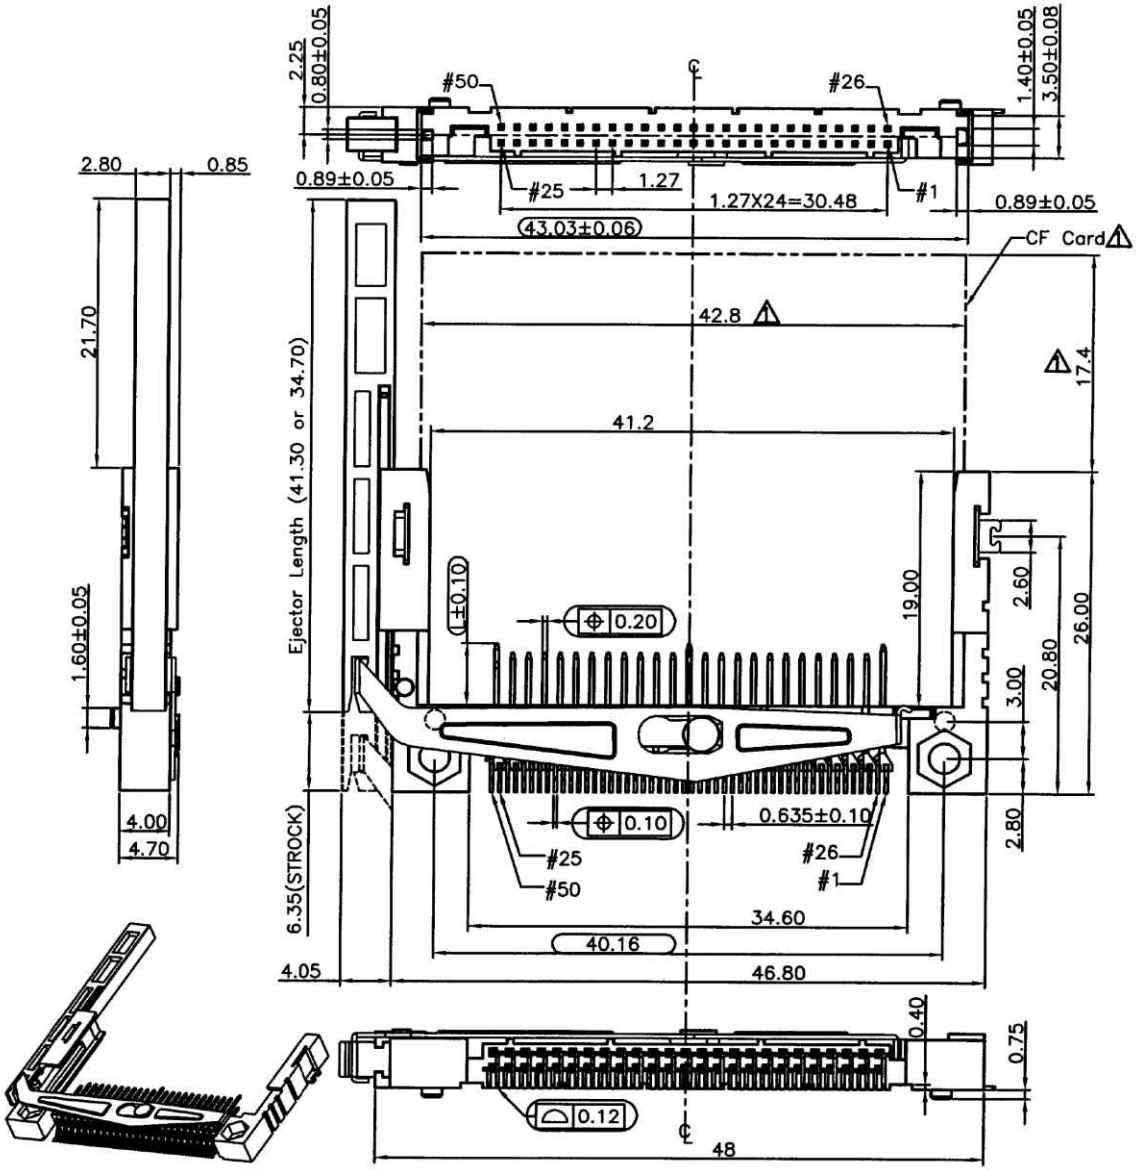

SPECIFICATION
MATERIAL
Insulator: Thermal Plastic UL94V-0
Contacts: Copper Alloy
Pivot Shell: Stainless Steel
Mount Ear: Copper Alloy
CONTACT PLATING
Underplate: 50u"~100u" Nickel
Contact Area: 1u"~30u" Selective Gold
Solder Tails Area: 100u"~200u" Tin/Lead Free(Brighten Tin/Matte Tin)

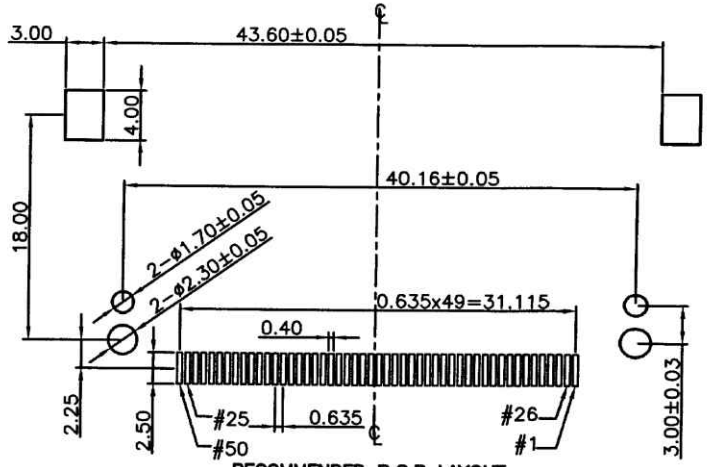

RECOMMENDED P.C.B LAYOUT
TOLERANCES: ±0.05mm

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
		.XX ±
		.XXX ±
DATE		ANG ±
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

CFC-PW40BE201RS-50-LF

SERIES
MALE
90°SMT
POST TO POST 40.16mm
B TYPE
EAR
TYPE2
NORMAL
RIGHT EJECTOR
ST
50WAY
LEADFREE

DESCRIPTION: