
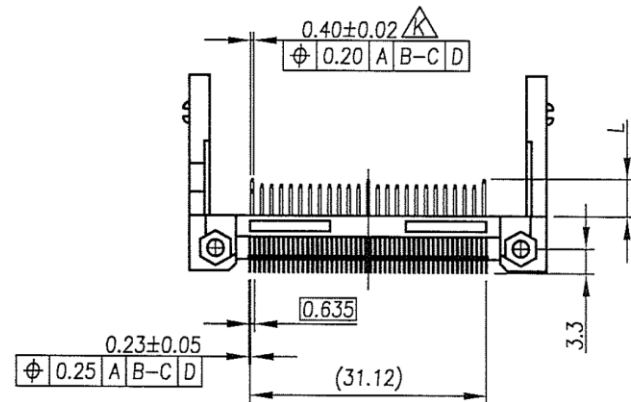
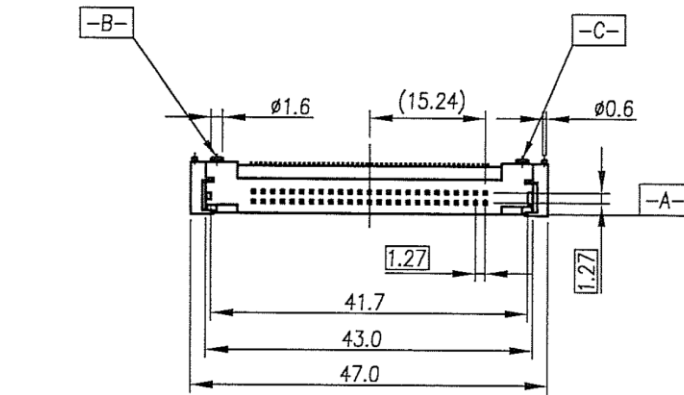


| Pin Type | Interface Dim L | Pin Type       | REV |
|----------|-----------------|----------------|-----|
| Detect   | 3.5 mm          | 25,26          | I   |
| General  | 4.25 mm         | All Other Pins | J   |
| Power    | 5.0 mm          | 1,13,38,50     | K   |

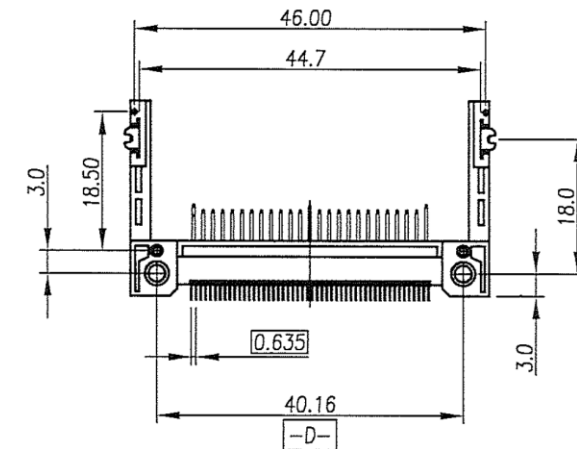

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ±


PPOJECTION

照片框

ORDER INFORMATION


CFC-PW40CE121-50-LF  
SERIES TYPE 1 50WAY  
MALE EAR C TYPE NORMAL  
90°SMT POST TO POST 40.16mm  
LEADFREE  
STANDOFF 2.0mm

DESCRIPTION:

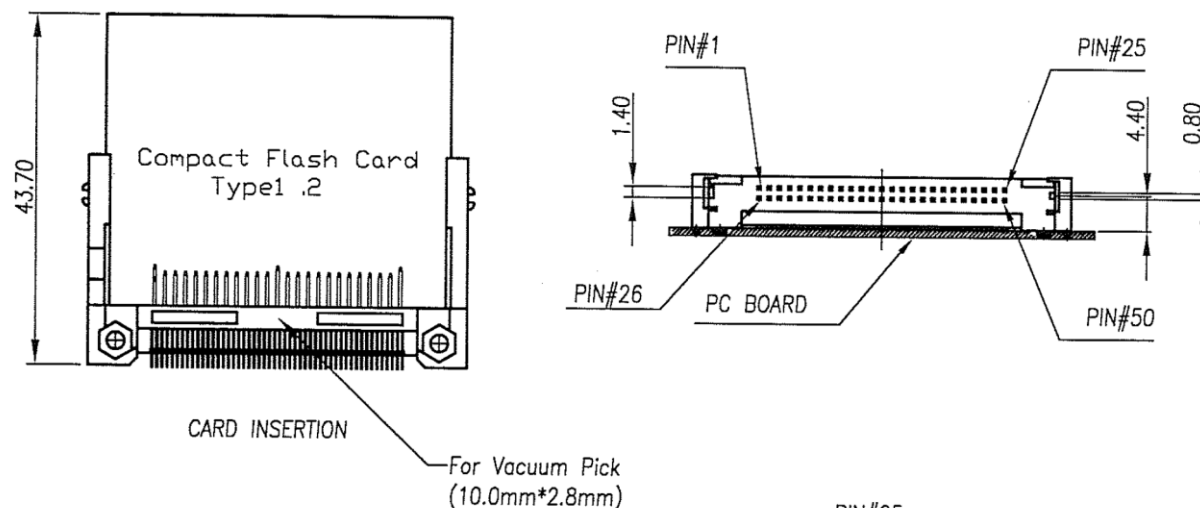

#### SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0  
 CONTACT : Copper Alloys  
 VOLTAGE RATING : 100VAC  
 CURRENT RATING : 0.5A  
 CONTACT RESISTANCE:40 mΩ max.  
 INSULATION RESISTANCE:1000M Ω max.  
 DIELECTRIC STRENGTH : 500VAC/1min  
 OPERATION TEMPERATURE : -40°C~85°C

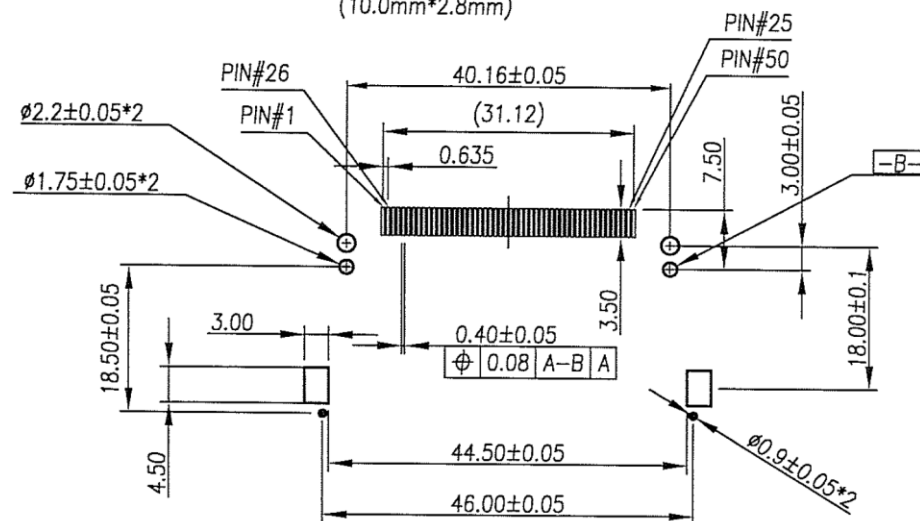

P.C.B Layout

照片框

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ± 0.10  
 ANG ±

PPOJECTION

#### ORDER INFORMATION

CFC-PW40CE121-50-LF  
 SERIES TYPE 1 50WAY LEADFREE  
 MALE EAR C TYPE NORMAL  
 90°SMT POST TO POST 40.16mm  
 STANDOFF 2.0mm

DESCRIPTION: