
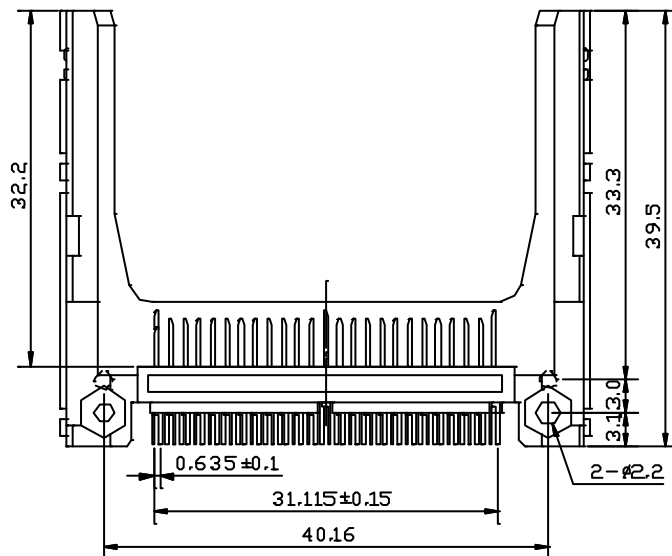
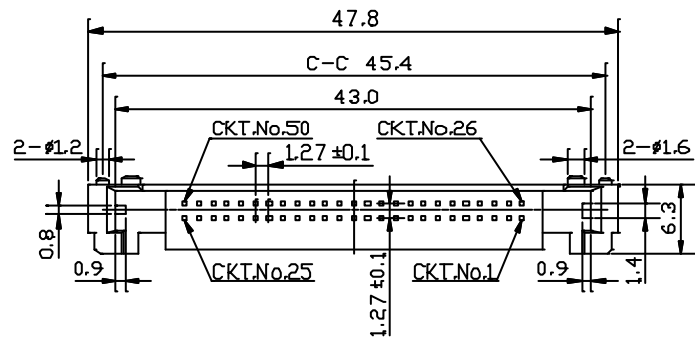


NOTES:
 MATERIAL
 Insulator: Glass Reinforced LCP UL94V-0
 Contacts: Brass Alloy
 Mount ear: Brass ; Tin plated overall
 CONTACT PLATING
 Contact area: Gold plating over 40u" Nickel
 Solder tail area: 100u" tin plating over 40u" Nickel

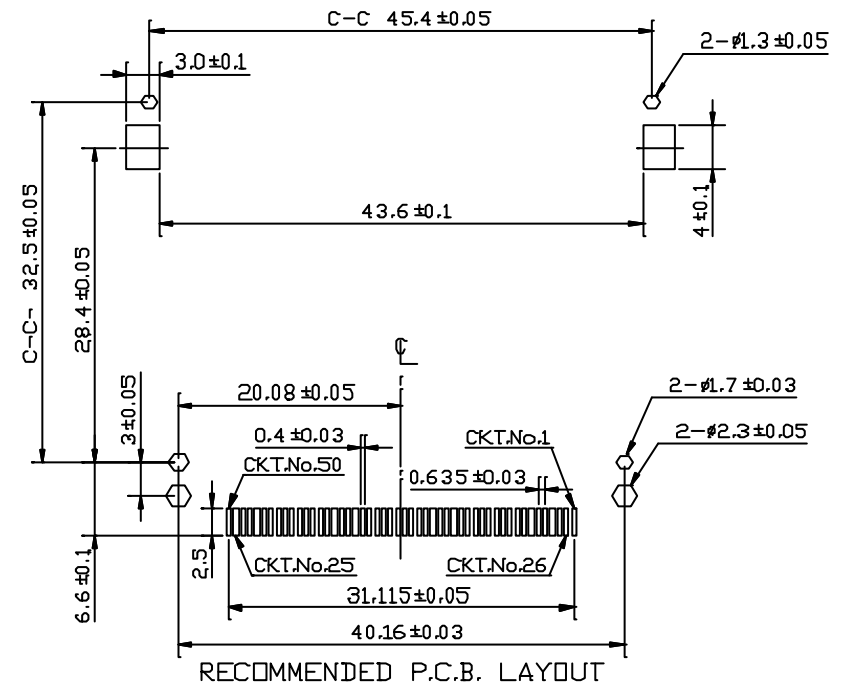

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±


DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

CFC-PW40CE201-50-LF
 SERIES MALE 90°SMT TYPE 2 EAR C TYPE POST TO POST 40.16mm
 LEADFREE 50WAY NORMAL STANDOFF 0.0mm

DESCRIPTION: CF CARD HEADER SMT 50P TYPE II (A)

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com