
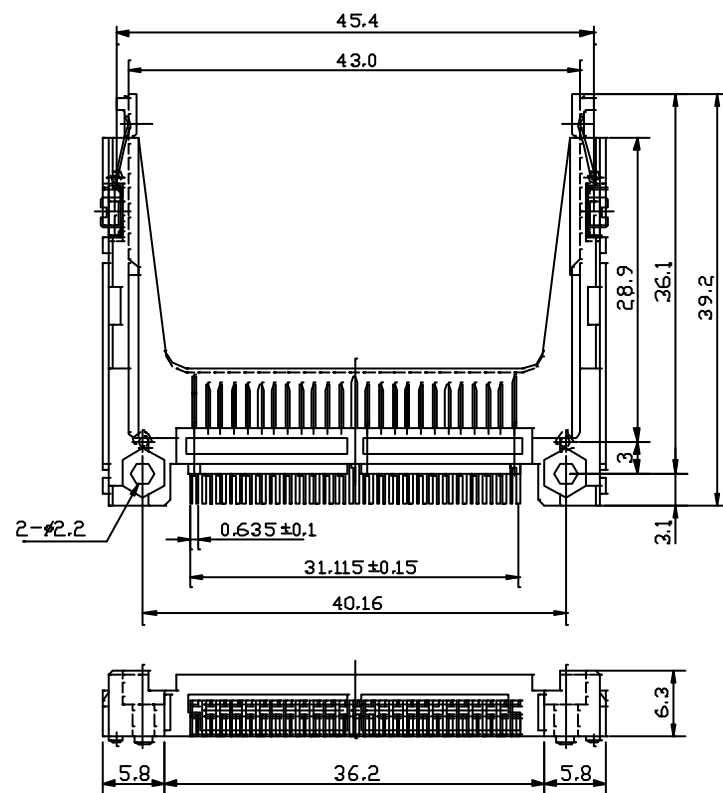


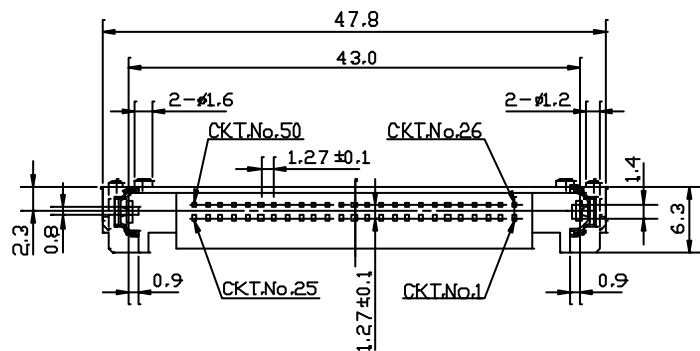

NOTES:

MATERIAL

Insulator: Glass Reinforced LCP UL94V-0


Contacts: Brass Alloy

Mount ear: Brass ; Tin plated overall

CONTACT PLATING

Contact area: Gold plating over 40u" Nickel

Solder tail area: 100u" tin plating over 40u" Nickel

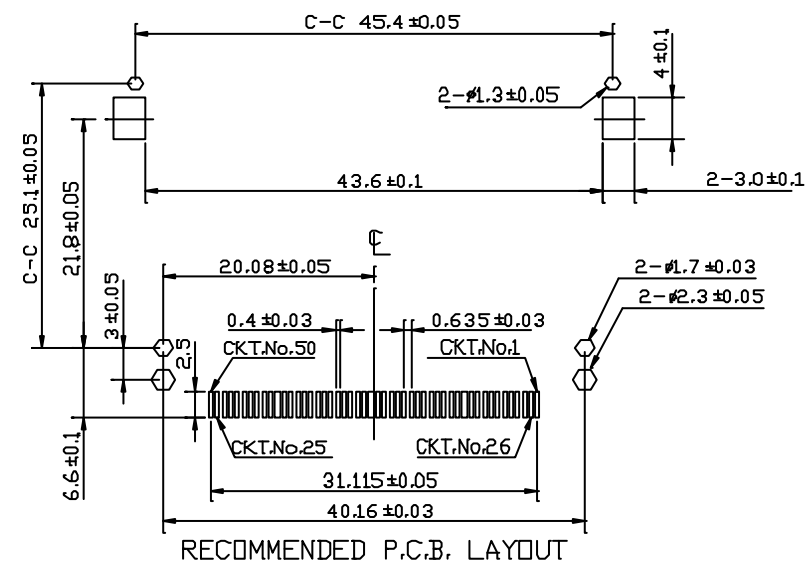

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
X. $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

CFC-PW40CE201H-50-LF
SERIES MALE 90°SMT TYPE 2 EAR C TYPE
HOOK NORMAL STANDOFF 0.0mm
LEADFREE 50WAY
POST TO POST 40.16mm

DESCRIPTION: CF CARD HEADER SMT 50P TYPE II (B0)