

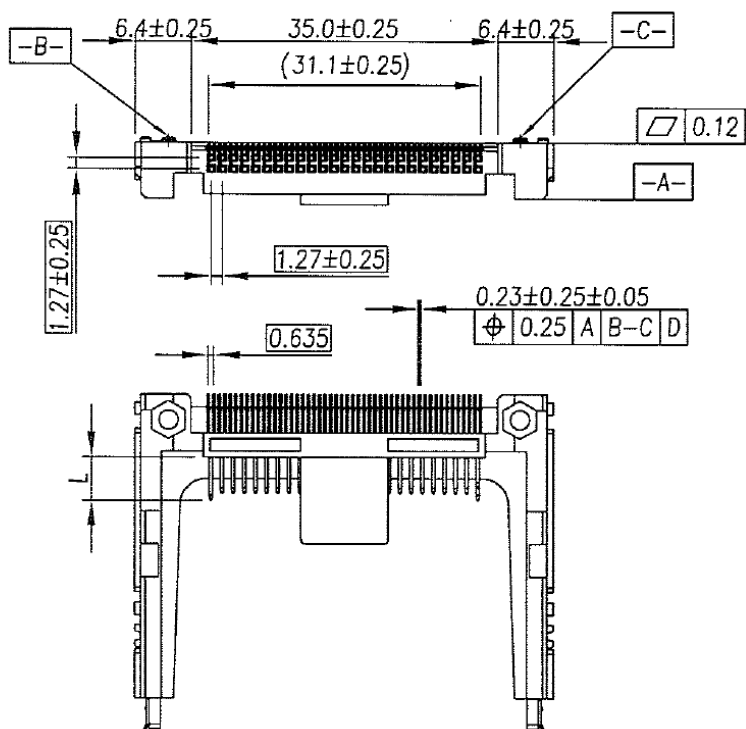
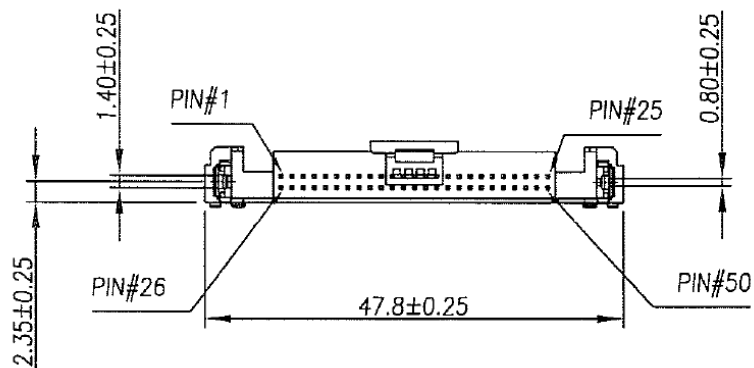


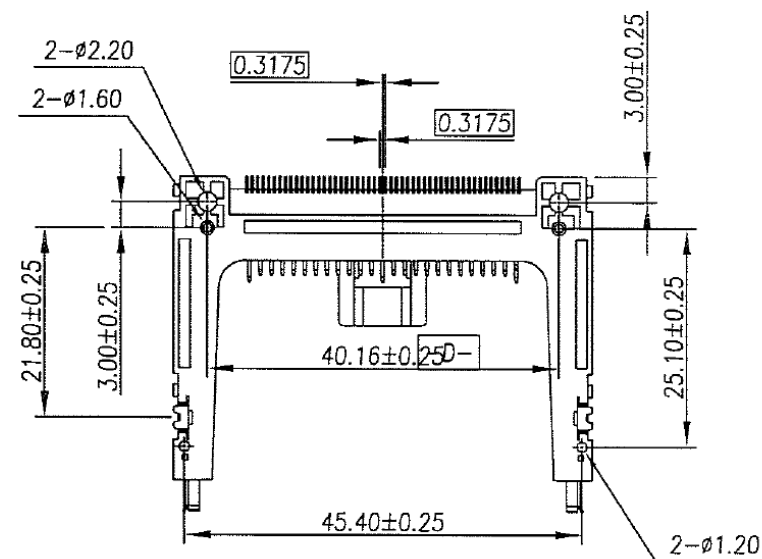

Pin Type	Interface Dim L	Pin Type	REV
Detect	3.5 mm	25,26	
General	4.25 mm	All Other Pins	
Power	5.0 mm	1,13,38,50	

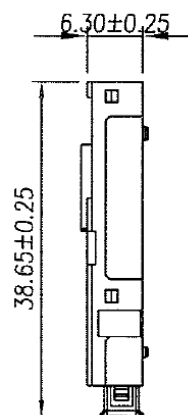

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

CFC-PW40CE201HCR-50-LF

SERIES

MALE

90°SMT

POST TO POST 40.16mm

C TYPE

EAR TYPE 2

CAP

HOOK

NORMAL

STANDOFF 0.0mm

REEL


LEADFREE

50WAY

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: CF TYPE2 50 PIN SMT NORMAL TYPE WITH CAP

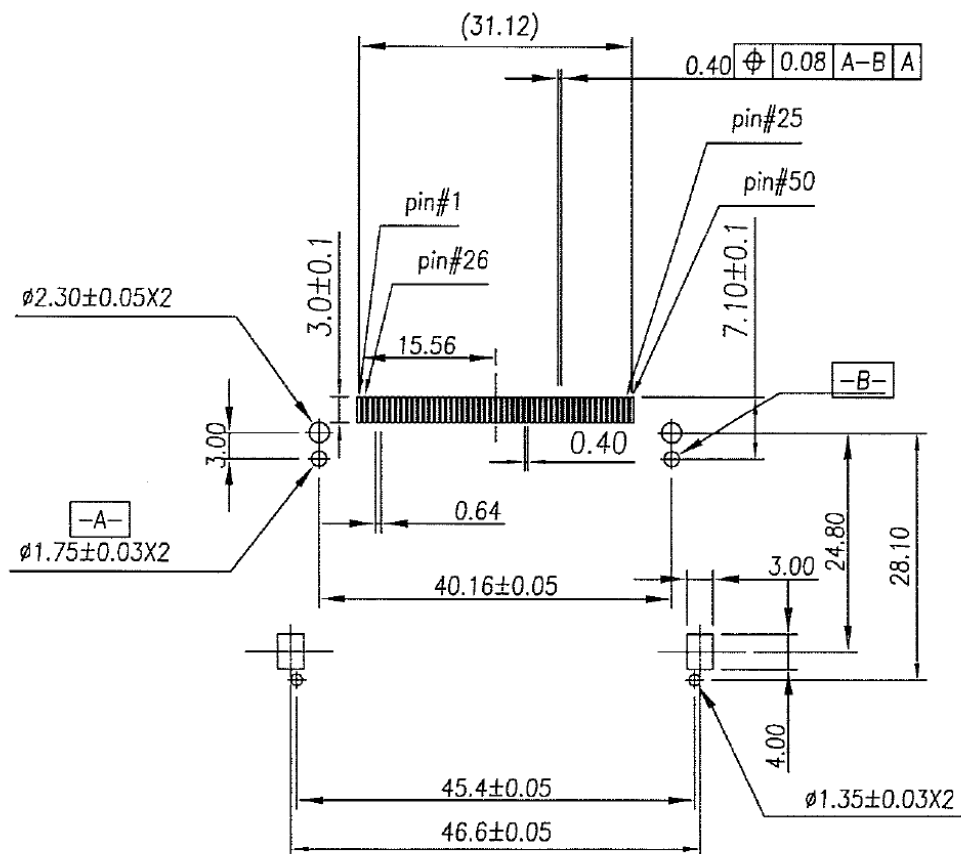

P.C.B Layout

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0
 CONTACT : Copper Alloys
 VOLTAGE RATING : 100VAC
 CURRENT RATING : 0.5A
 CONTACT RESISTANCE: 40 m Ohm max.
 INSULATION RESISTANCE: 1000M Ohm min.
 DIELECTRIC STRENGTH : 500VAC/1min
 OPERATION TEMPERATURE : -40°C~85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

照片框



ORDER INFORMATION

CFC-PW40CE201HCR-50-LF


SERIES MALE 90°SMT POST TO POST 40.16mm C TYPE EAR TYPE 2 CAP HOOK NORMAL REEL STANDOFF 0.0mm LEADFREE 50WAY

DESCRIPTION: CF TYPE2 50 PIN SMT NORMAL TYPE WITH CAP

- 1-1. 成品置於COMPONENTS區,成品需朝同一方向置放
- 1-2. 端子朝向CARRIER TAPE 底部
- 1-1. PUT CF CARD CONN. IN COMPONENT AREA, CHAMFER OF CF CARD CONN. IS THE SAME DIRECTION TO CARRIER TAPE.
- 1-2. CONTACT ARE TOWARDS TO THE BOTTOM OF CARRIER TAPE.

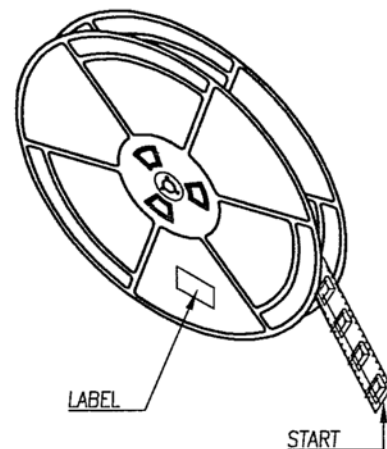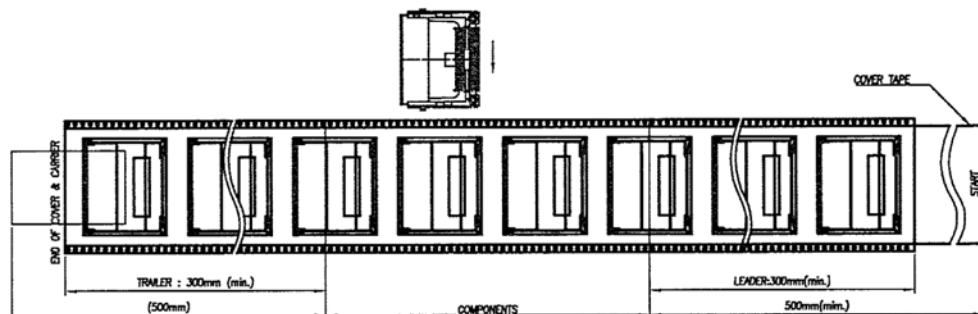


- 2-1. CARRIER & COVER黏合(或熱壓合) CARRIER末端(END)以膠帶固定於HUB的小的那一端).COVER朝向REEL的外側
- 2-2. LABEL貼於REEL外側 (靠起點位置)
- 2-3. CARRIER不足一捲長度時(見包裝細表)不可重疊接合使用
- 2-4. COVER TAPE 不可重疊搭接使用
- 2-5. 以透明膠帶將START(起始點)固定住
- 2-1. ADHERE OR HEAT COVER & CARRIER TAPE PUT THE END OF CARRIER ON THE "HUB'S" GATE, FIX WITH TRANSPARENT TAPE.
- 2-2. STICK LABEL ON OUTSIDE OF REEL, NEAR THE POSITION OF START SIDE OF COVER.
- 2-3. IF THE LENGH OF CARRIER ISN'T LONG ENOUGH CONNECT TO USE AS PACKING LIST, COVER TAPE IS ALSO IN THE SAME CONDITION.
- 2-4. FIX THE COVER TAPE OF STARD WITH TRANSPARENT TAPE.

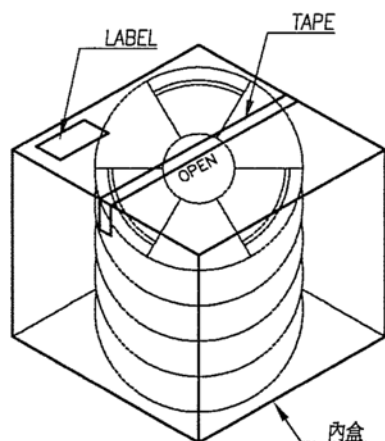

- 3-1. REEL之LABEL一致朝上.
- 3-2. 先置入一片EPE於內箱底部.
- 3-3. 將REEL平置於防水袋內, 袋內放入2包乾燥劑, 再置於內盒中.
- 3-4. 再置入一片EPE於REEL頂部.
- 3-5. 以TAPE封合, 並貼上成品包裝標籤
- 3-1. PUT THE LABEL OF REEL UP.
- 3-2. PUT 1 PIECE OF EPE INTO BOTTOM OF BOX. THE LABEL OF REEL UP.
- 3-3. PUT 4 REELS AND 2 BAGS SILICA GEL INTO PE BAG. THEN PUT DOWN IN BOX, AFTER PE BAG WAS CLOSED.
- 3-4. PUT 1 PIECE OF EPE ON TOP OF P.E. BAG
- 3-5. CLOSE BOX AND SEAL WITH TAPE. STICK THE PRODUCT LABEL ON TOP SIDE OF BOX.

- 4-1. 每2個內盒置於一個外箱中.
- 4-2. 以TAPE封合, 並貼上成品包裝標籤
- 4-1. PUT INTO 2 BOXES IN ONE CARTON.
- 4-2. SEAL WITH TAPE AND STICK PRODUCT LABEL ON LEFT SIDE.

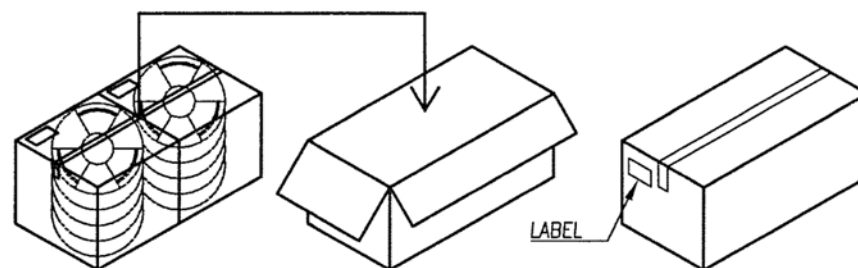

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

CFC-PW40CE201HCR-50-LF

SERIES

MALE

90°SMT

POST TO POST 40.16mm

C TYPE

EAR TYPE 2

CAP

HOOK

NORMAL

STANDOFF 0.0mm

REEL

LEADFREE
50WAY

DESCRIPTION: CF TYPE2 50 PIN SMT NORMAL TYPE WITH CAP

包裝材料明細 (每一外箱用量) PACKING LIST (FOR ONE CARTON B. O. M)			
材料名稱 MATERIAL NAME	材料料號 PART NO.	淨重 (KG) NET WEIGHT	用量 Q' TY
包裝帶 (CARRIER)	1-1015-050003		2.00
包裝帶 (COVER)	1-1404-072000		0.30
包裝盤 (REEL)	1-1301-072000		8
防水袋 (PE BAG)	1-0503-001000		2
紙箱 (BOX)	1-0101-520040		2
外箱 (CARTON)	1-0102-524040		1
EPE 氣泡布 (EPE)	1-1501-011000		4
乾燥劑 (SILICE GEL)	1-1201-000000		4
標籤紙 (LABEL)	1-1100-000001		11

備註: 1.CARRIER=25M COVER=200M

適用產品料號 PRODUCT P/N.	包裝容量 PACKING LIST			重量 WEIGHT	
	承裝量/每盤 PCS/REEL	盤數/每小箱 REELS/ INNER CARTON	小箱數/每大箱 INNER CARTON/ OUTSIDE CARTON	每個淨重 (KG) NET WEIGHT	每箱毛重 WEIGHT
CFC-PW40CE201HCR-50	90	4	2		

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PROJECTION

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

CFC-PW40CE201HCR-50-LF

SERIES

MALE

90°SMT

POST TO POST 40.16mm

C TYPE

EAR TYPE 2

CAP

HOOK

NORMAL

REEL

STANDOFF 0.0mm

LEADFREE

50WAY

DESCRIPTION: CF TYPE2 50 PIN SMT NORMAL TYPE WITH CAP