




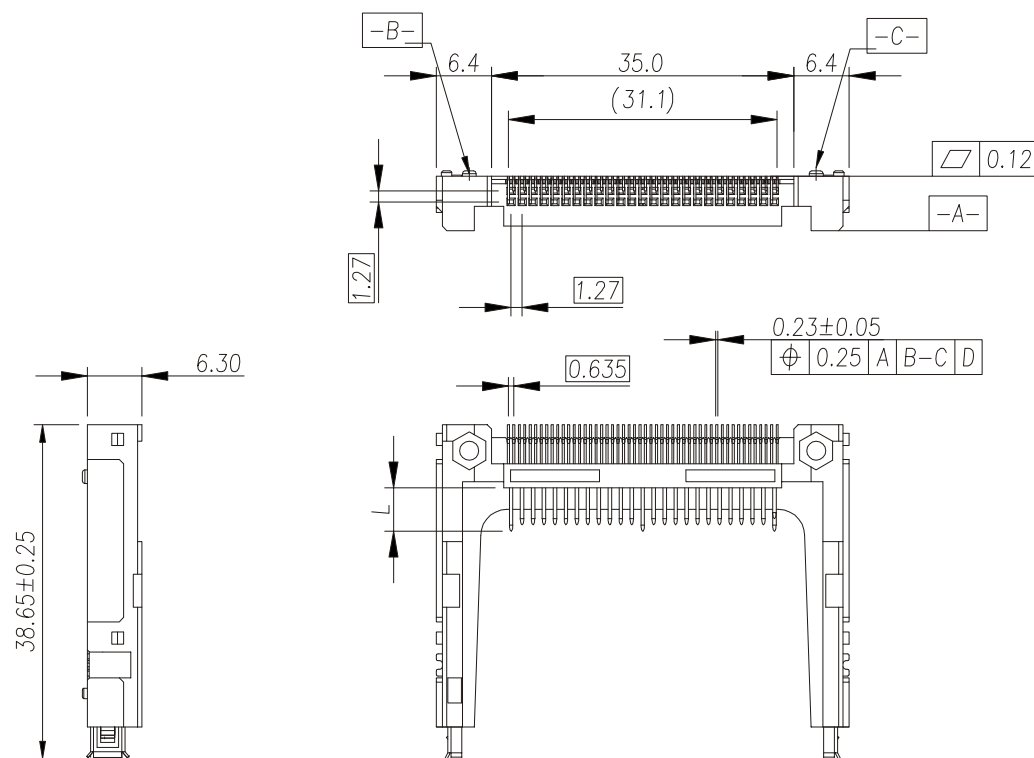

Pin Type	Interface Dim L	Pin Type
Detect	3.5 mm	25,26
General	4.25 mm	All Other Pins
Power	5.0 mm	1,13,38,50

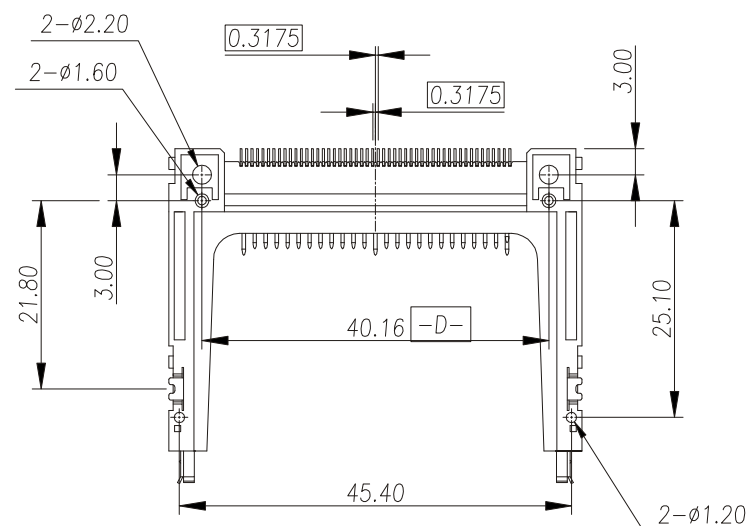

Ordering Information:

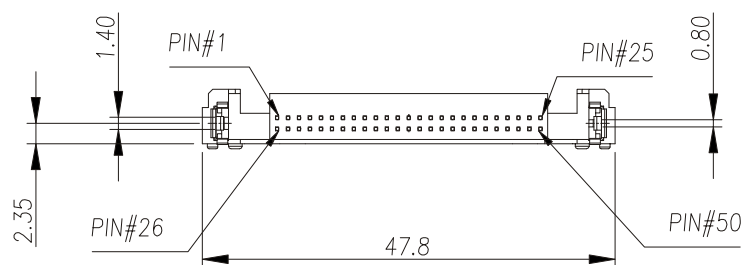

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION




ORDER INFORMATION


CFC-PW40CE201HRS-50-LF

SERIES MALE 90°SMT POST TO POST 40.16mm C TYPE TYPE 2 EAR HOOK NORMAL STANDOFF 0.0mm ST 50WAY LEADFREE RIGHT EJECTOR

DESCRIPTION: CF TYPE2 ,50PIN SMT NORMAL TYPE

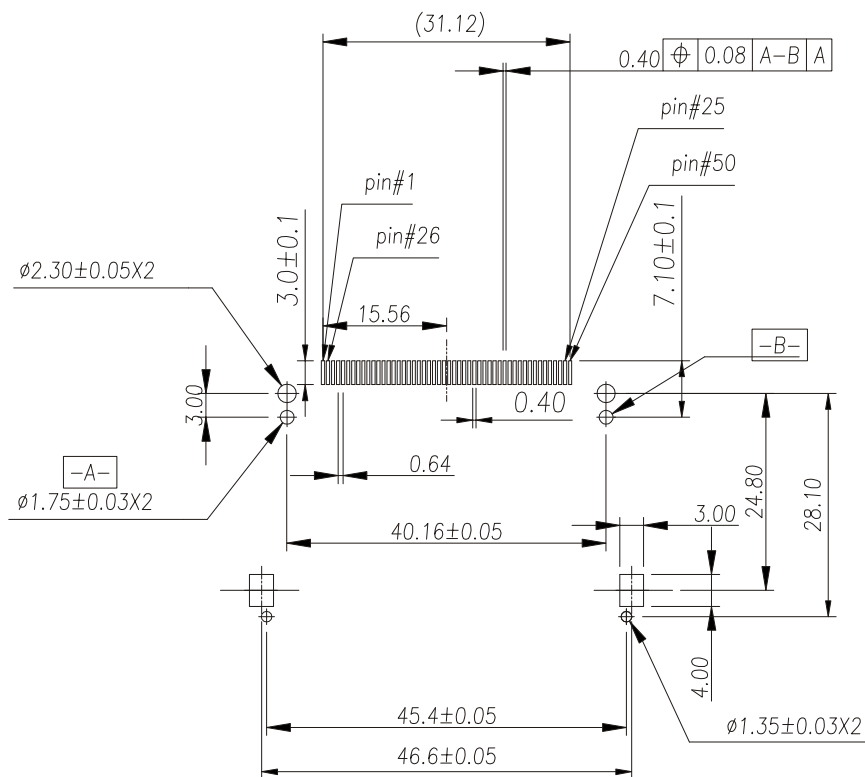

P.C.B Layout

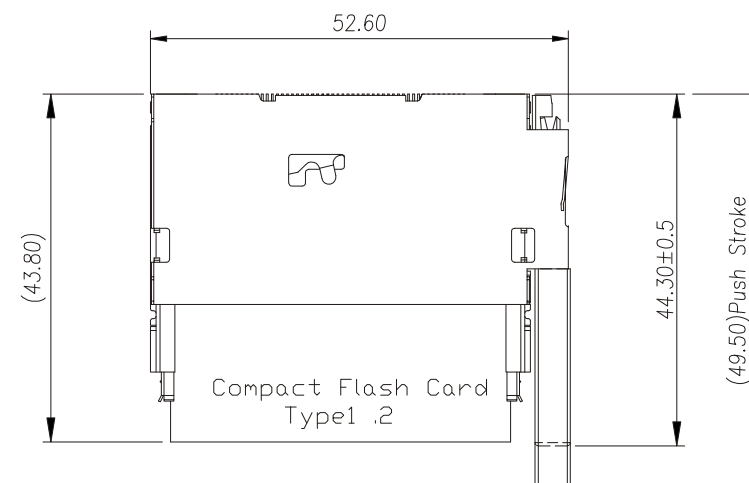

Header With Ejector

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0
 CONTACT : Copper Alloys
 VOLTAGE RATING : 100VAC
 CURRENT RATING : 0.5A
 CONTACT RESISTANCE: 40 m Ohm max.
 INSULATION RESISTANCE: 1000M Ohm min.
 DIELECTRIC STRENGTH : 500VAC/1min
 OPERATION TEMPERATURE : $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
 .X, $\pm$
 .XX, $\pm$
 .XXX, $\pm$
 ANG, $\pm$

PPOJECTION



ORDER INFORMATION

CFC-PW40CE201HRS-50-LF

SERIES MALE 90°SMT POST TO POST 40.16mm C TYPE TYPE 2 EAR HOOK NORMAL RIGHT EJECTOR ST 50WAY LEADFREE

DESCRIPTION: CF TYPE2 ,50PIN SMT NORMAL TYPE