

SPECIFICATION

MATERIAL

Insulator: Thermal Plastic UL94V-0

Contacts: Copper Alloy




Mount Ear: Copper Alloy

CONTACT PLATING


Underplate: 50u"~100u" Nickel

Contact Area: 1u"~30u" Selective Gold

Solder Tail Area: 100u"~200u" Tin/Lead Free(Brighten Tin/Matte Tin)

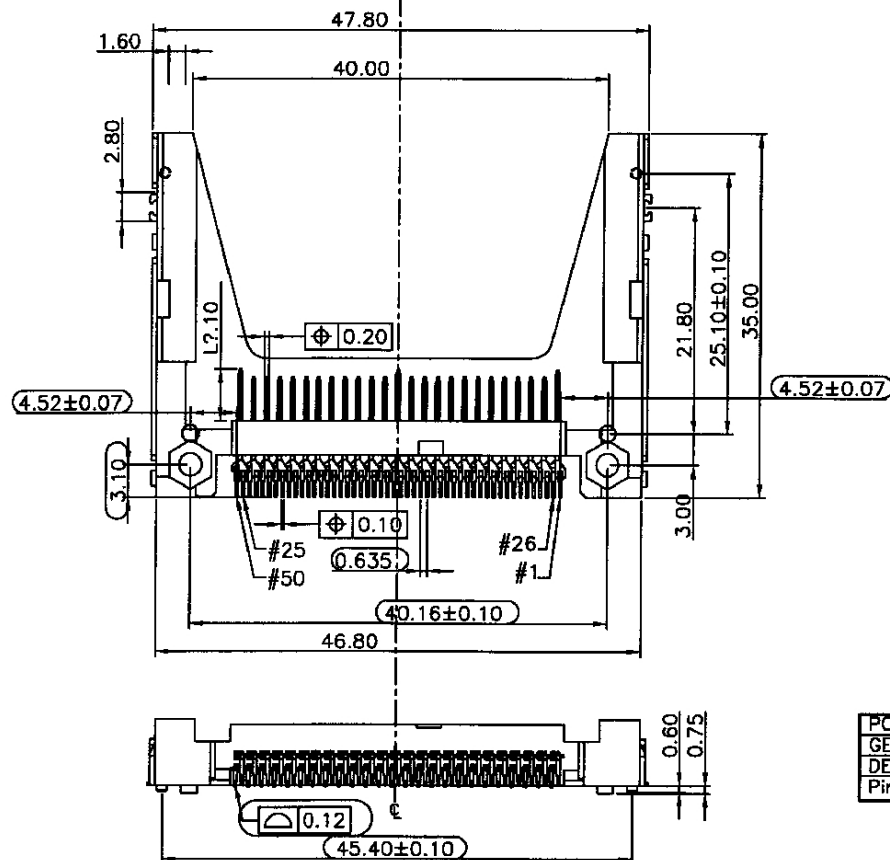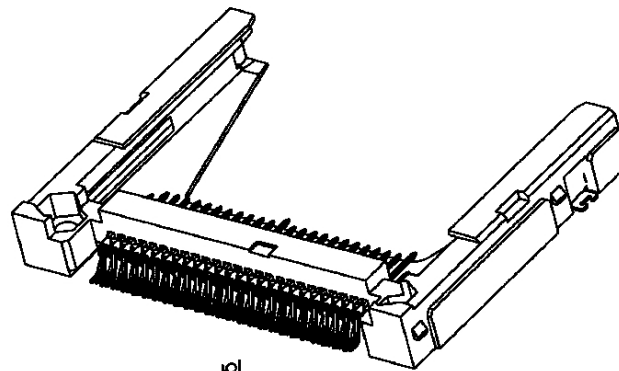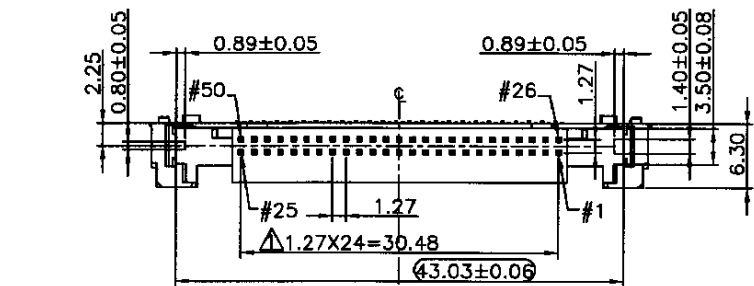

POWER	5.00mm	1,13,38,50
GENERAL	4.25mm	all other pins
DETECT	3.50mm	25,26
Pin type	Interface Dim. L	Pin No.

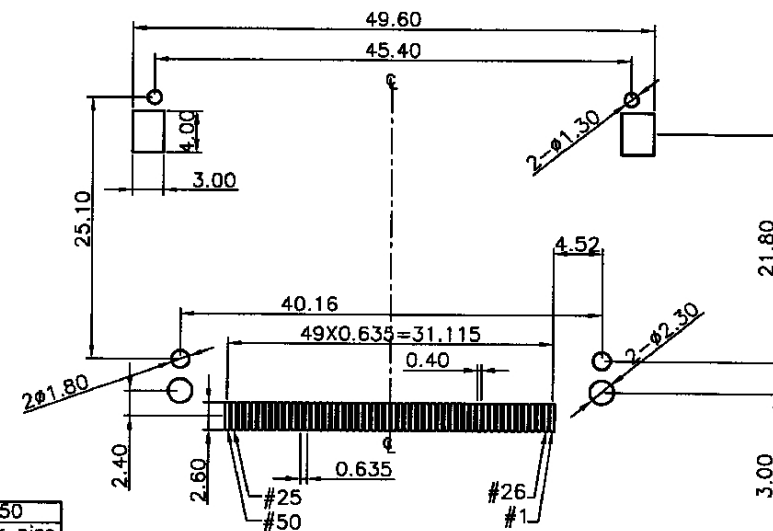

RECOMMENDED P.C.B. LAYOUT
TOLERANCES: ±0.05mm

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. CFC-PW40CE201RF-50

DWG NO. CFC-PW40CE201RF-50

FILE NO.

UNIT / mm

SCALE 1:1

RoHS Compliant

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIPTION:


AREA

REVISIONS




HK

DATE

煜倫股份有限公司

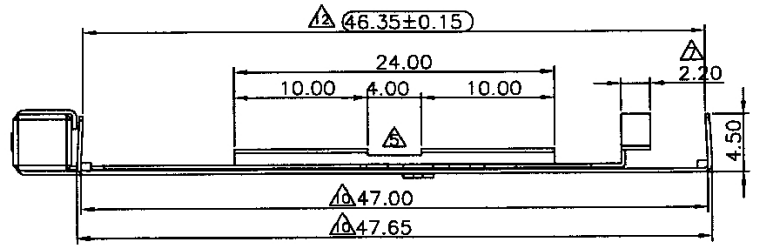

SPECIFICATION
MATERIAL
Push Button: Thermal Plastic UL94V-0
Cover: Stainless Steel
Pivot Shell: Stainless Steel
Rated Voltage: 35V/AC Max

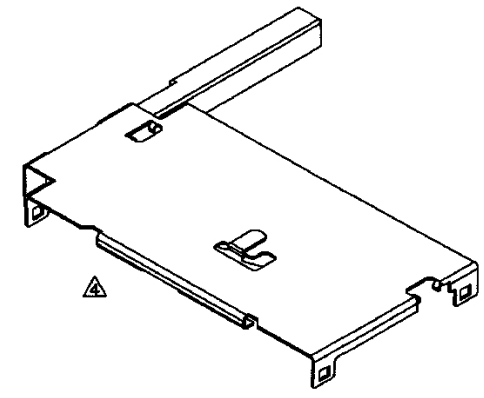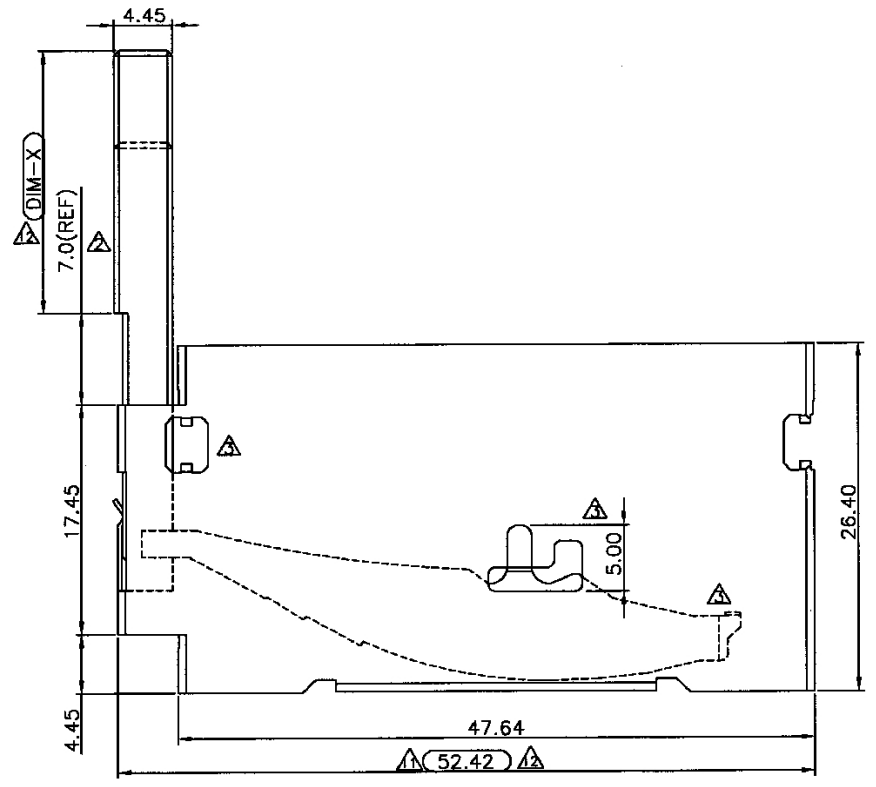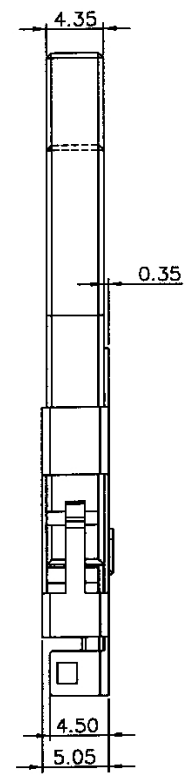

※ When assemble ejector shell to C.F Connector
one side snapped then other side

For SIP
For smk/cpk

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO.CFC-PW40CE201RF-50									
DWG NO. CFC-PW40CE201RF-50		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:				
FILE NO.		DRAWING BY							
UNIT / mm	SCALE 1 : 1	PROJECTION			AREA	REVISIONS	HK	DATE	

煜倫股份有限公司