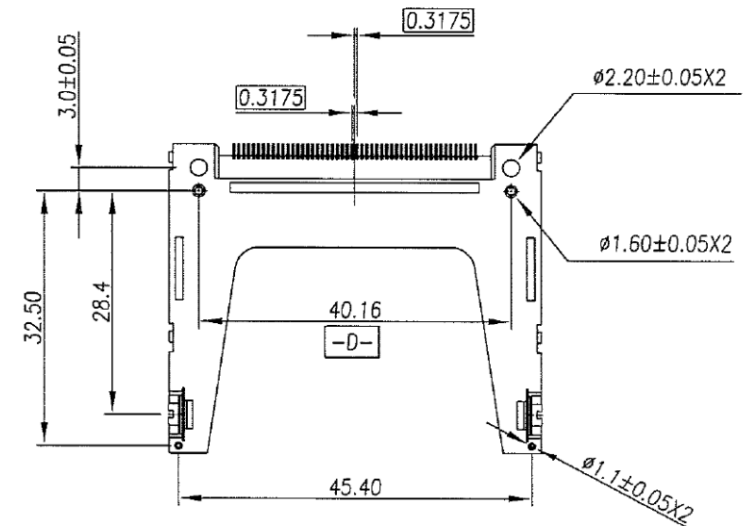
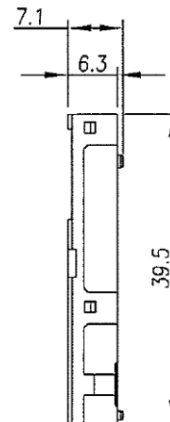
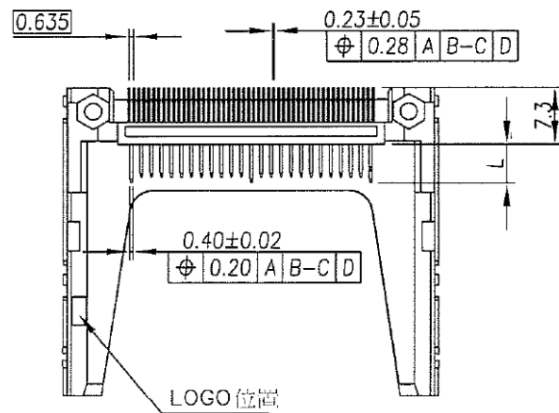
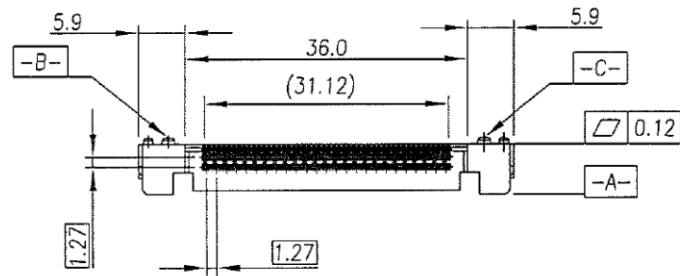


MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.3
.XX ± 0.2
.XXX ± 0.1
ANG ±

PPOJECTION


照片框

ORDER INFORMATION


CFC-PW40CE201RS-50-LF

SERIES MALE TYPE 2 RIGHT EJECTOR NORMAL
90°SMT EAR C TYPE
POST TO POST 40.16mm
ST 50WAY LEADFREE
STANDOFF 0.0mm

DESCRIPTION:

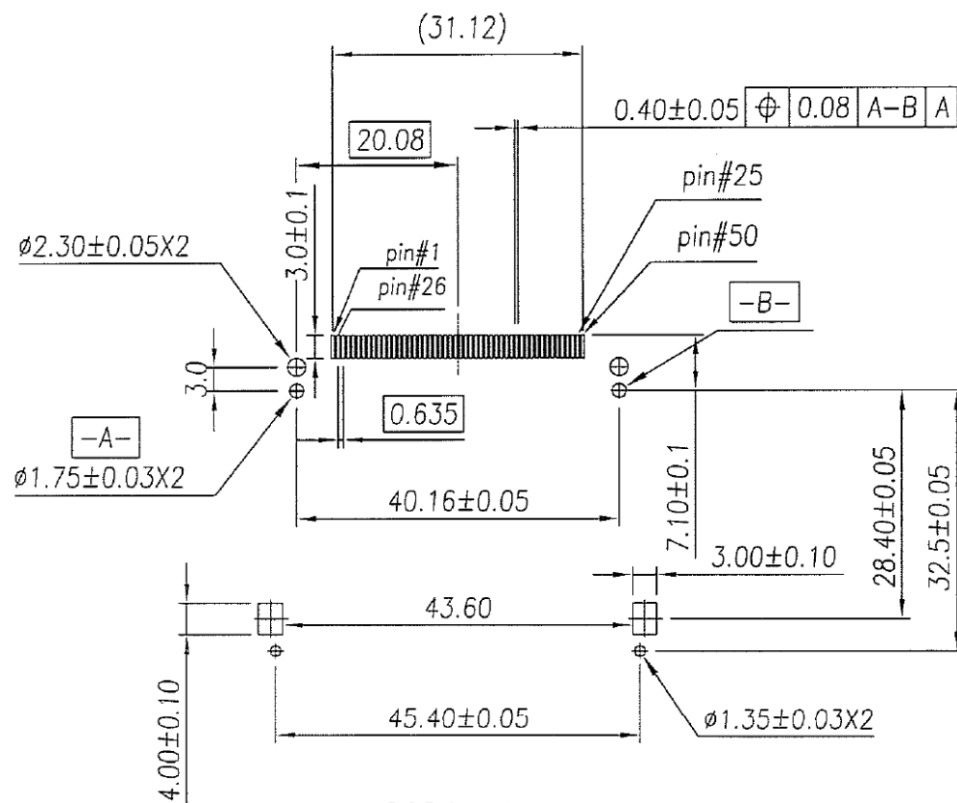

P.C.B Layout

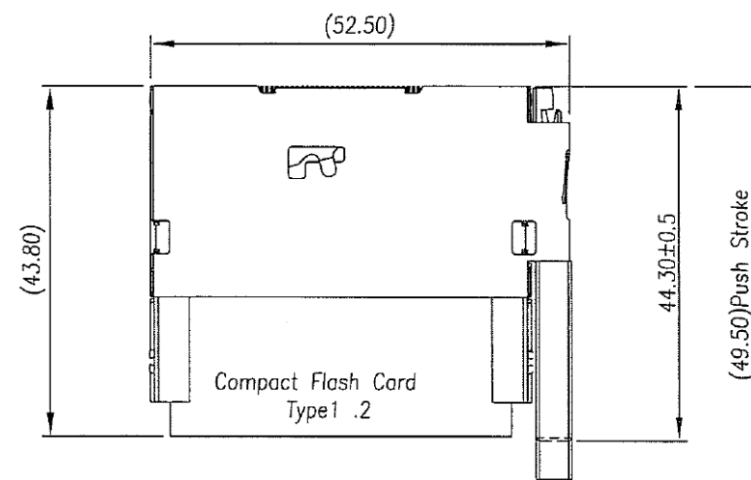

Header With Ejector

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0
 CONTACT : Copper Alloys
 VOLTAGE RATING : 100VAC
 CURRENT RATING : 0.5A
 CONTACT RESISTANCE:40m Ohm max.
 INSULATION RESISTANCE:1000M Ohm min.
 DIELECTRIC STRENGTH : 500VAC/1min
 OPERATION TEMPERATURE : -40°C~85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.3
 .XX ± 0.2
 .XXX ± 0.1
 ANG ±

照片框

ORDER INFORMATION

CFC-PW40CE201RS-50-LF
 SERIES MALE 90°SMT POST TO POST 40.16mm C TYPE TYPE 2 EAR ST 50WAY LEADFREE RIGHT EJECTOR NORMAL STANDOFF 0.0mm

DESCRIPTION: