


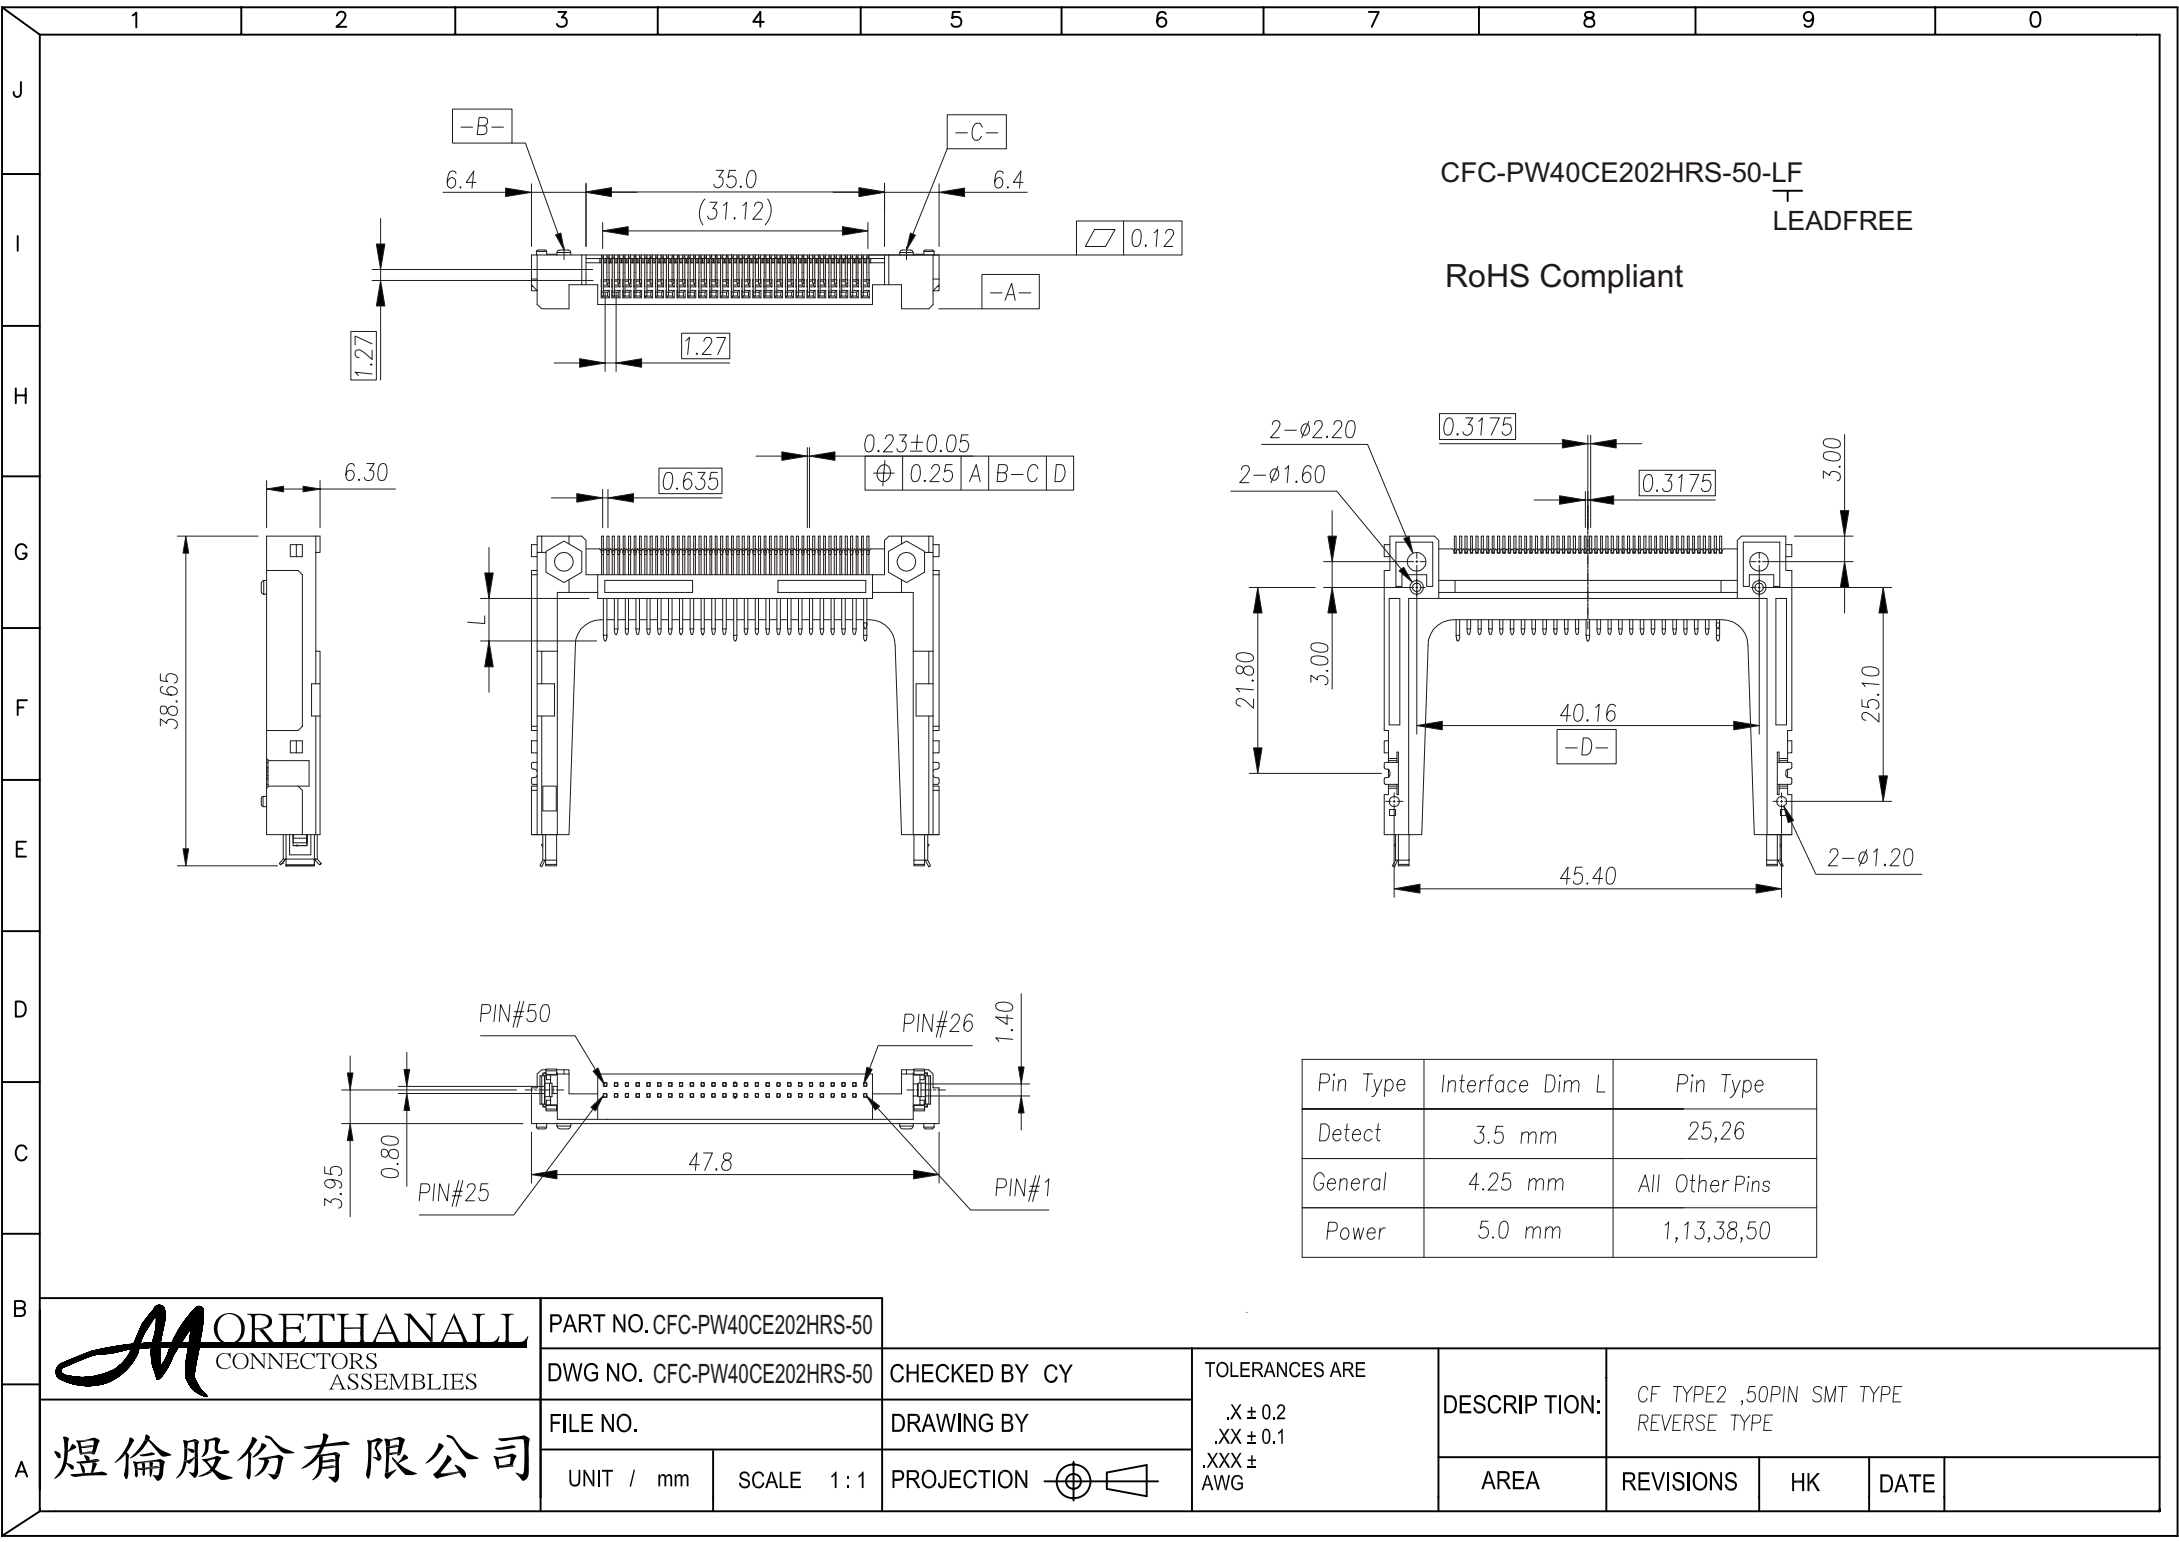

CFC-PW40CE202HRS-50-LF
LEADFREE

RoHS Compliant

Pin Type	Interface Dim L	Pin Type
Detect	3.5 mm	25,26
General	4.25 mm	All Other Pins
Power	5.0 mm	1,13,38,50

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. CFC-PW40CE202HRS-50

DWG NO. CFC-PW40CE202HRS-50

CHECKED BY CY

TOLERANCES ARE

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

DESCRIP TION: CF TYPE2 ,50PIN SMT TYPE
REVERSE TYPE

煜倫股份有限公司


FILE NO.

DRAWING BY

UNIT / mm

SCALE 1:1

PROJECTION




AREA

REVISIONS


HK

DATE

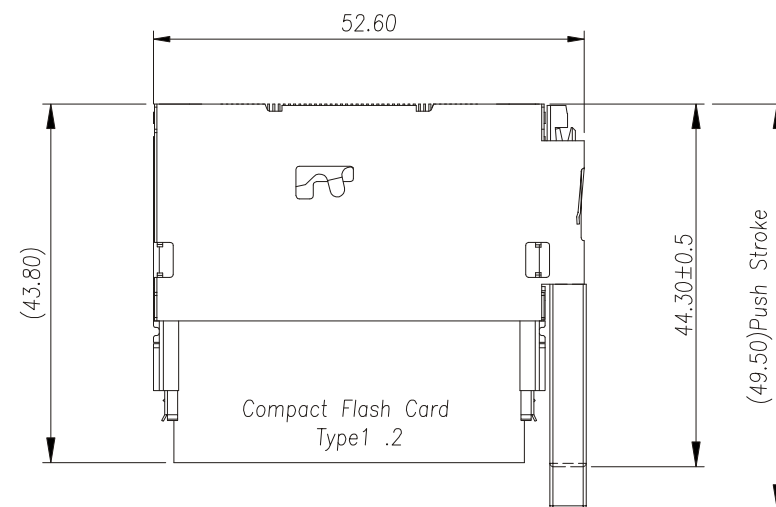


SPECIFICATIONS:

OPERATION TEMPERATURE : -40°C~85°C



PART NO. CFC-PW40CE202HRS-50											
DWG NO. CFC-PW40CE202HRS-50		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± AWG	DESCRIP TION:	CF TYPE2 ,50PIN SMT TYPE REVERSE TYPF						
FILE NO.		DRAWING BY									
UNIT / mm	SCALE 1 : 1	PROJECTION 			AREA	REVISIONS	HK	DATE			

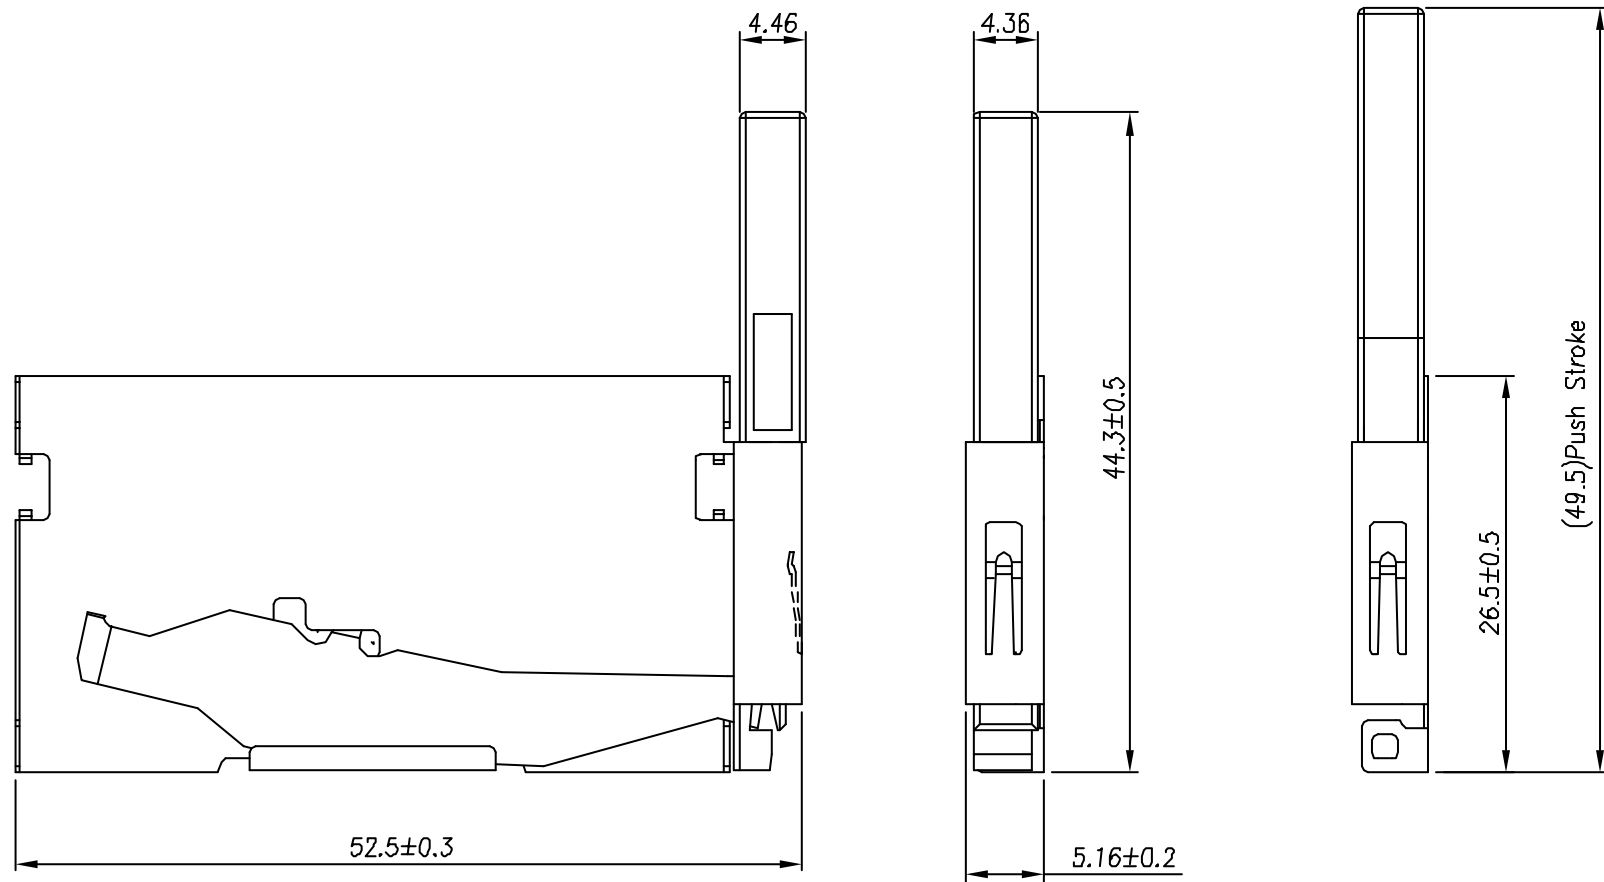

NOTES:

COVER: SUS 304, T=0.3mm

HEAVER: SUS 304, T=0.3mm

EJECTOR: High temperature plastic
UL94V-0 COLOR=BLACK

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. CFC-PW40CE202HRS-50

DWG NO. CFC-PW40CE202HRS-50

CHECKED BY CY

FILE NO.

DRAWING BY

TOLERANCES ARE

.X $\pm$ 0.2
.XX $\pm$ 0.1
.XXX $\pm$
AWG

DESCRIPTION:


CF Card Conn.
TYPE2 EJECTOR

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE