
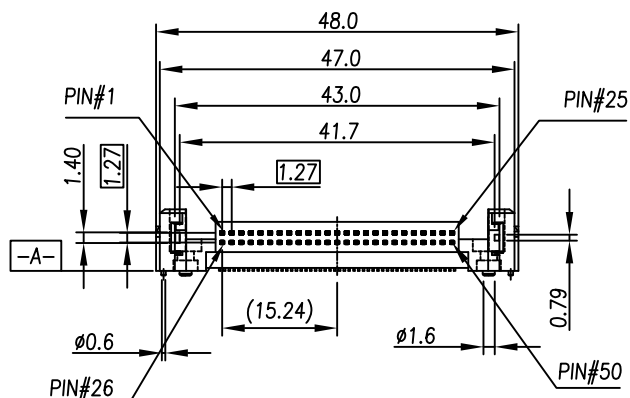
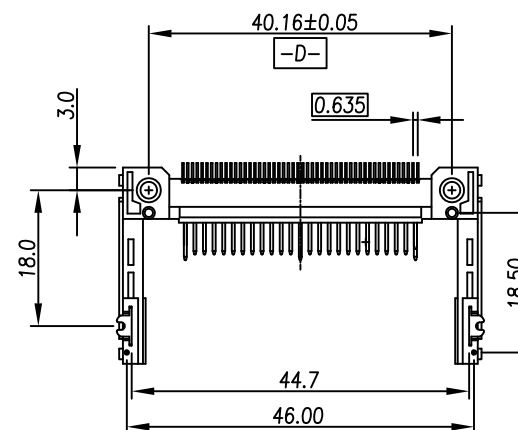



Pin Type	Interface Dim L	Pin Type	REV	MODIFICATION	DATE	DRAW
Detect	3.5 mm	25,26	B	EN-05-0810	2005/08/11	TONY
General	4.25 mm	All Other Pins	C	EN-10-0418	2010/04/09	TONY
Power	5.0 mm	1,13,38,50				

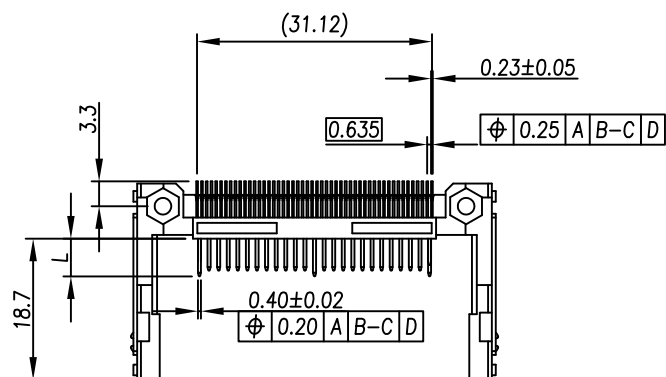

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±




ORDER INFORMATION

CFC-PW40CE221-50-LF

SERIES MALE 90°SMT TYPE 2 EAR C TYPE LEADFREE 50WAY NORMAL STANDOFF 2.0mm POST TO POST 40.16mm



DESCRIPTION: CF CARD CONN. TYPE1,2 STAND-OFF 2.0mm NORMAL TYPE

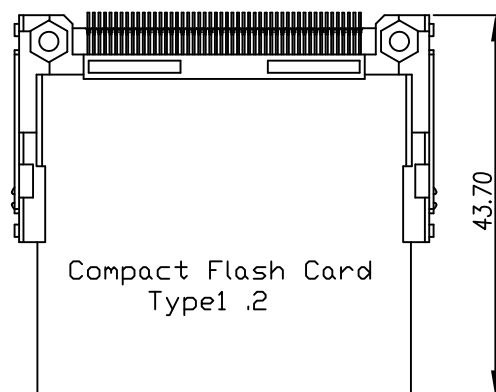

CARD INSERTION

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0
 CONTACT : Copper Alloys
 VOLTAGE RATING : 100VAC
 CURRENT RATING : 0.5A
 CONTACT RESISTANCE:40 mΩ max.
 INSULATION RESISTANCE:1000M Ω min.
 DIELECTRIC STRENGTH : 500VAC/1min
 OPERATION TEMPERATURE : -40°C~85°C

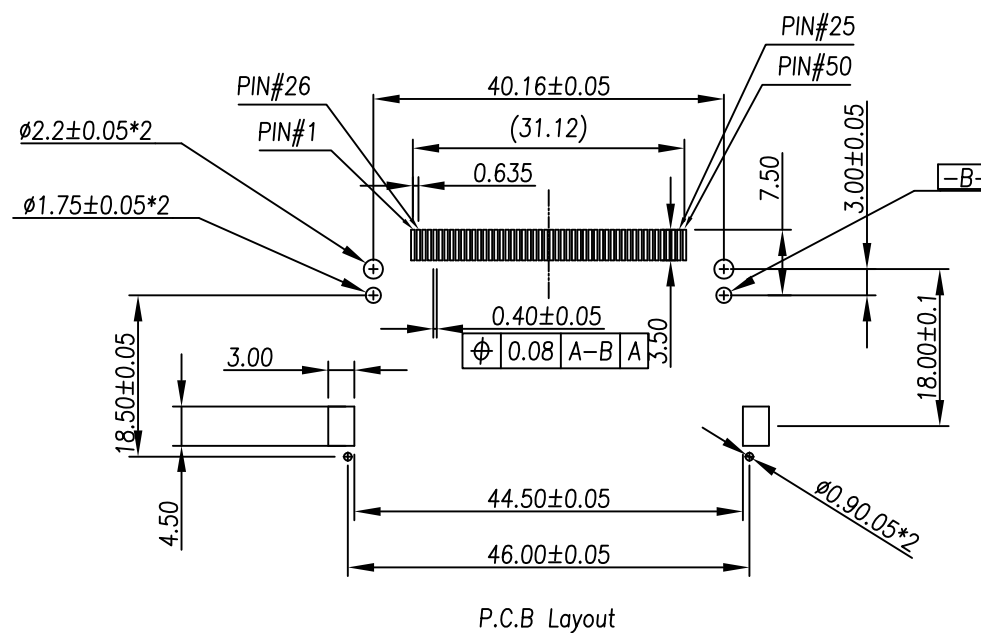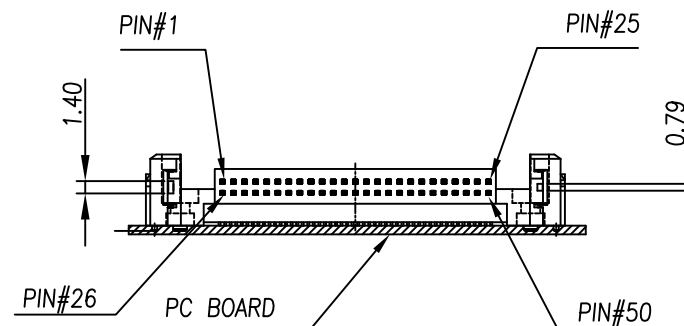

P.C.B Layout

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X.±
 .X±
 .XX±
 .XXX±
 ANG±

PPOJECTION



ORDER INFORMATION

CFC-PW40CE221-50-LF
 SERIES MALE TYPE 2 50WAY LEADFREE
 90°SMT EAR C TYPE NORMAL
 POST TO POST 40.16mm STANDOFF 2.0mm

DESCRIPTION: CF CARD CONN. TYPE1,2 STAND-OFF 2.0mm NORMAL TYPE