

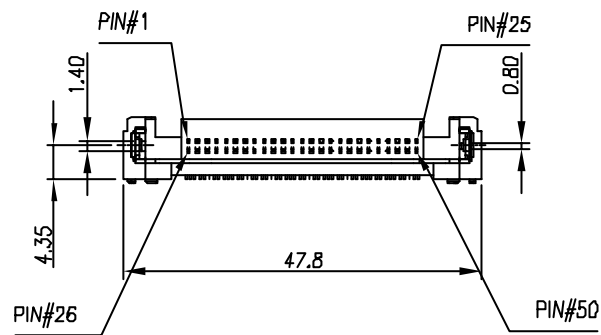
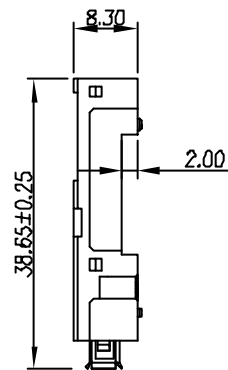
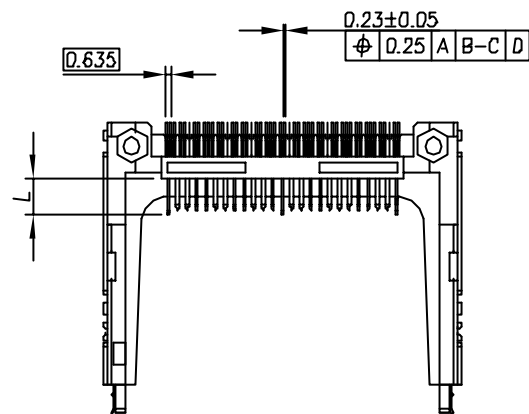


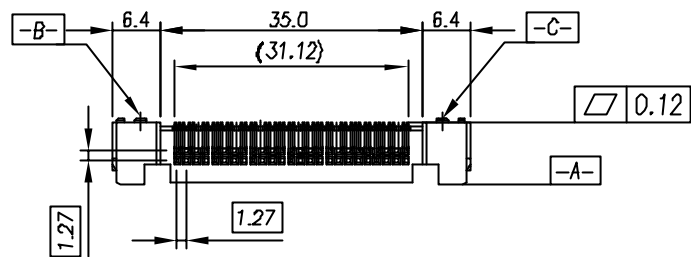

Pin Type	Interface Dim L	Pin Type
Detect	3.5 mm	25,26
General	4.25 mm	All Other Pins
Power	5.0 mm	1,13,38,50

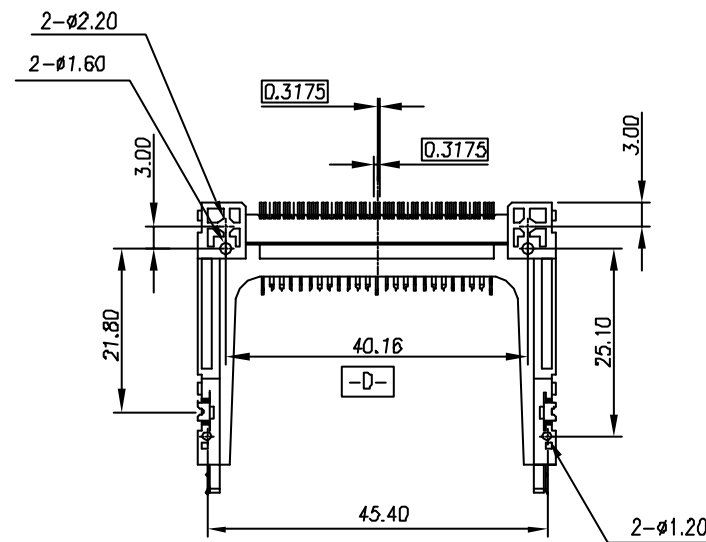

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. CFC-PW40CE221HRS-50

DWG NO. CFC-PW40CE221HRS-50

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION:

CF TYPE2 .50PIN SMT
NORMAL TYPE

AREA

REVISIONS

HK

DATE


煜倫股份有限公司

UNIT / mm


SCALE 1:1

PROJECTION



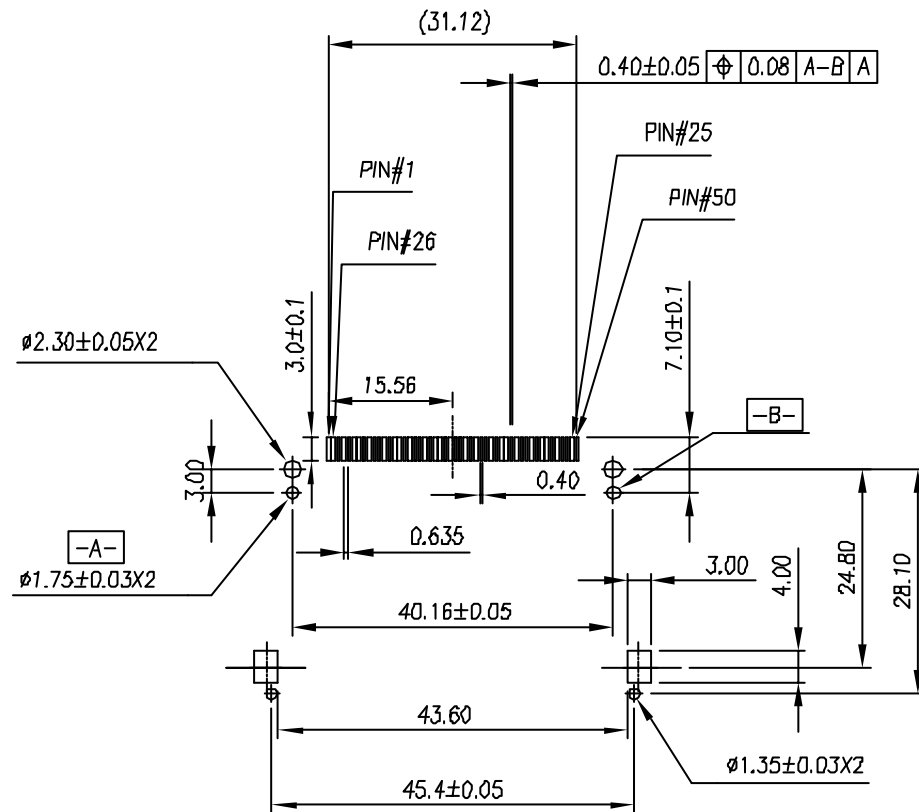

P.C.B Layout

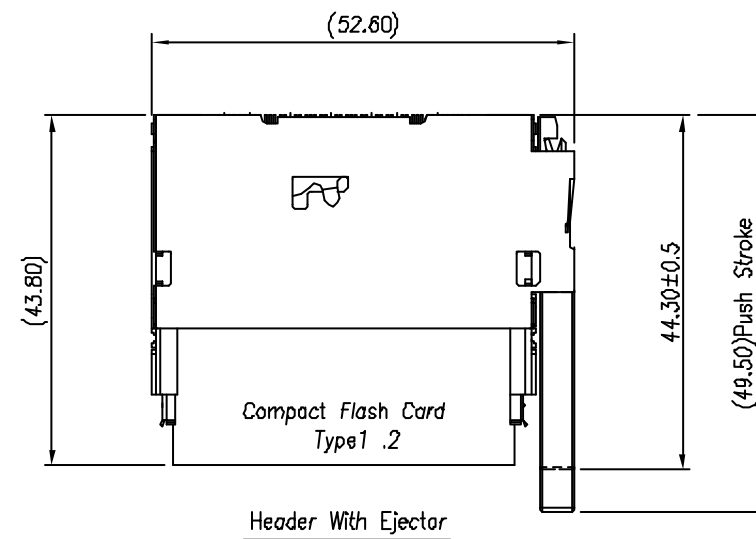

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0
 CONTACT : Copper Alloys
 VOLTAGE RATING : 100VAC
 CURRENT RATING : 0.5A
 CONTACT RESISTANCE:40 m Ohm max.
 INSULATION RESISTANCE:1000M Ohm min.
 DIELECTRIC STRENGTH : 500VAC/1min
 OPERATION TEMPERATURE : -40°C~85°C

MORETHANALL
 CONNECTORS
 ASSEMBLIES

PART NO.CFC-PW40CE221HRS-50

DWG NO. CFC-PW40CE221HRS-50

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司