
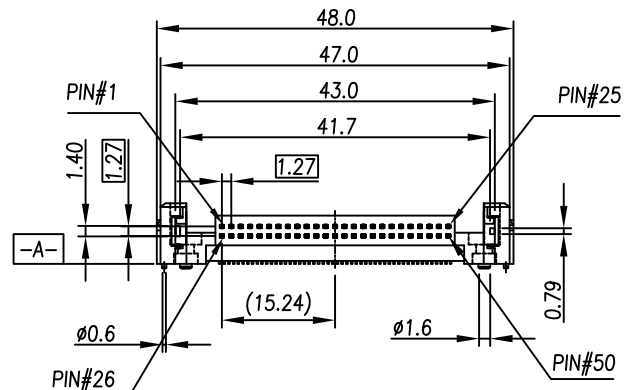
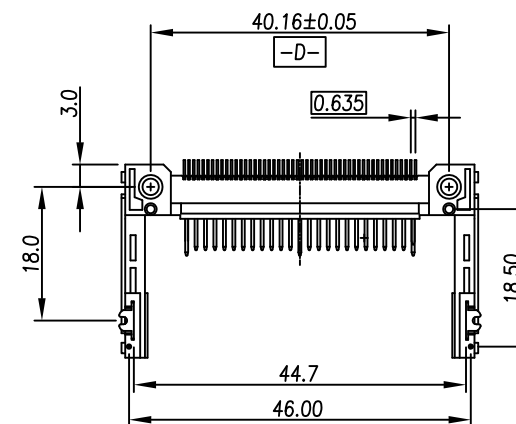



Pin Type	Interface Dim L	Pin Type	REV	MODIFICATION	DATE	DRAW
Detect	3.5 mm	25,26	B	EN-05-0810	2005/08/11	TONY
General	4.25 mm	All Other Pins	C	EN-10-0418	2010/04/09	TONY
Power	5.0 mm	1,13,38,50				

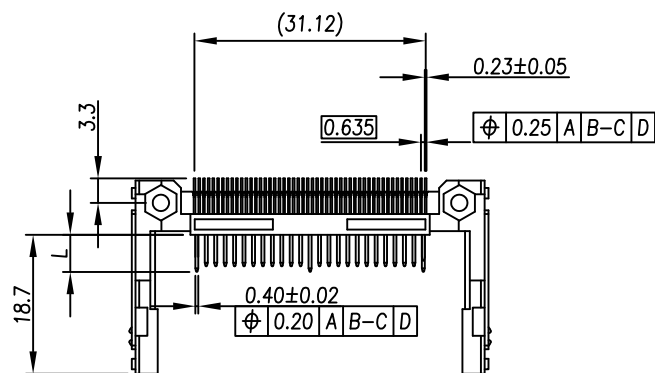

CFC-PW40CE221RS-50-LF
LEADFREE
RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. CFC-PW40CE221RS-50

DWG NO. CFC-PW40CE221RS-50

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION:

CF CARD CONN. TYPE1,2
STAND-OFF 2.0mm NORMAL TYPE


AREA

REVISIONS


HK

DATE


煜倫股份有限公司

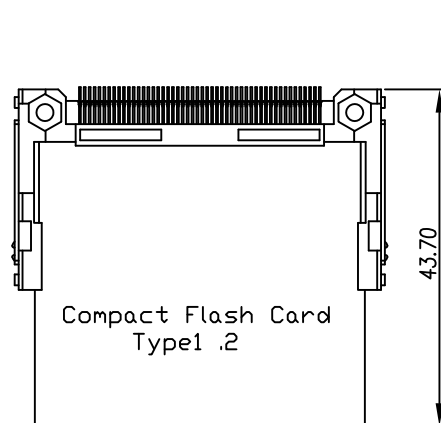

CARD INSERTION

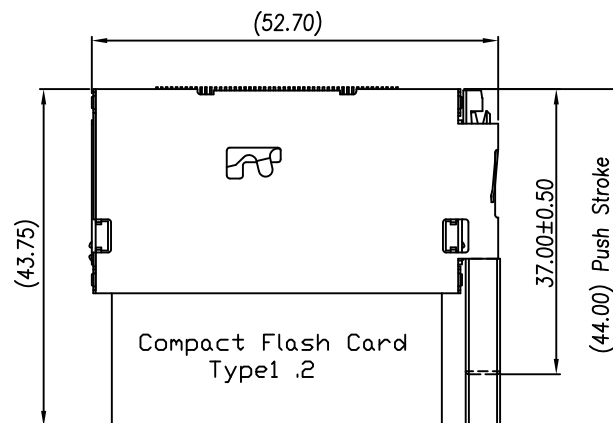


Header With Ejector

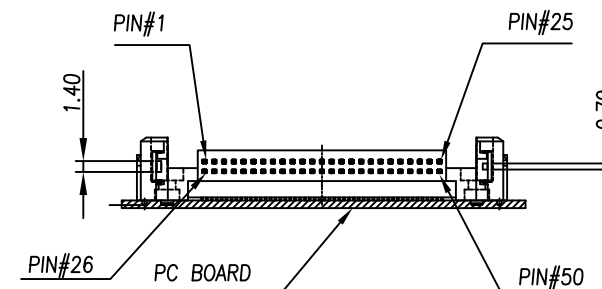

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0
 CONTACT : Copper Alloys
 VOLTAGE RATING : 100VAC
 CURRENT RATING : 0.5A
 CONTACT RESISTANCE:40 mΩ max.
 INSULATION RESISTANCE:1000M Ω min.
 DIELECTRIC STRENGTH : 500VAC/1min
 OPERATION TEMPERATURE : -40°C~85°C

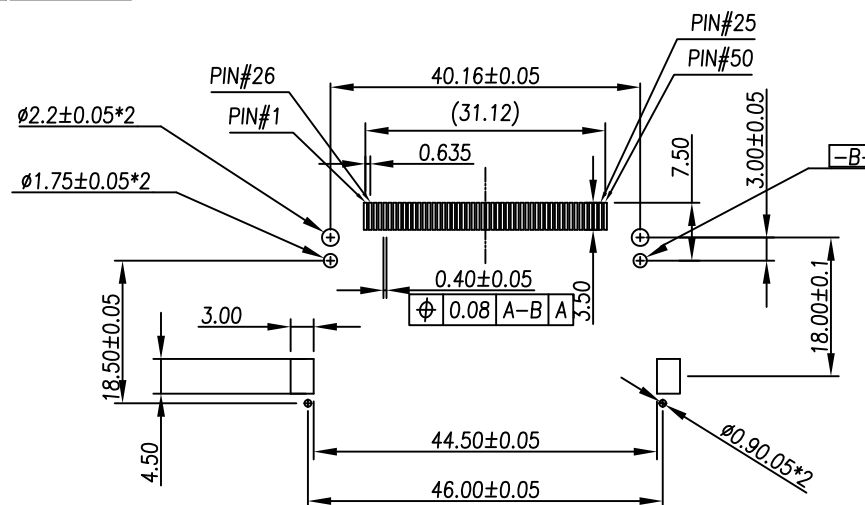

P.C.B Layout

MORETHANALL
 CONNECTORS
 ASSEMBLIES

PART NO. CFC-PW40CE221RS-50

DWG NO. CFC-PW40CE221RS-50

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司