

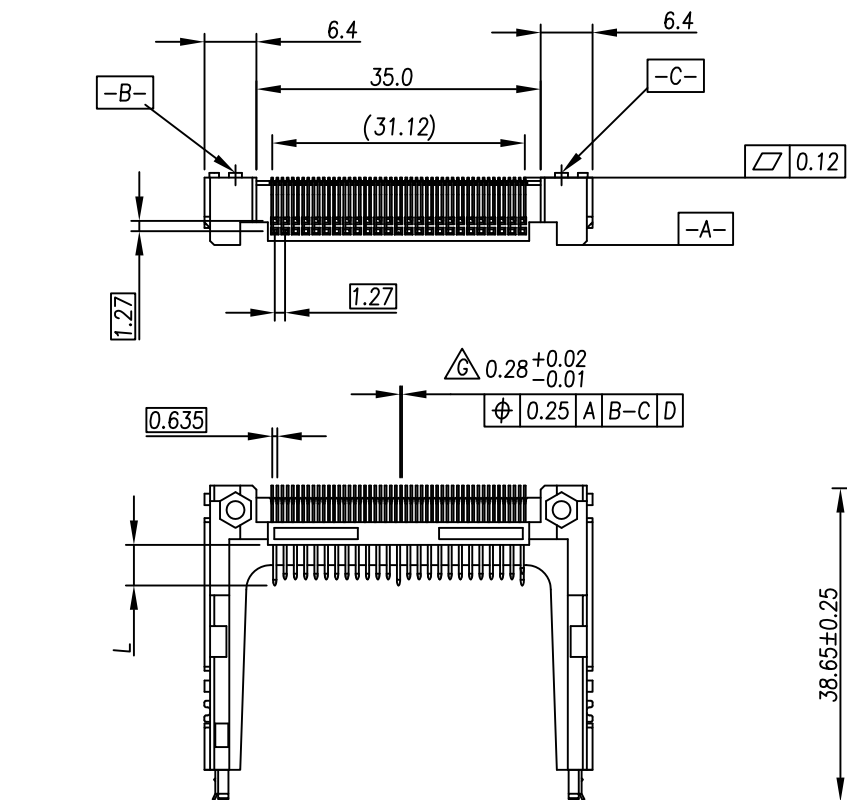


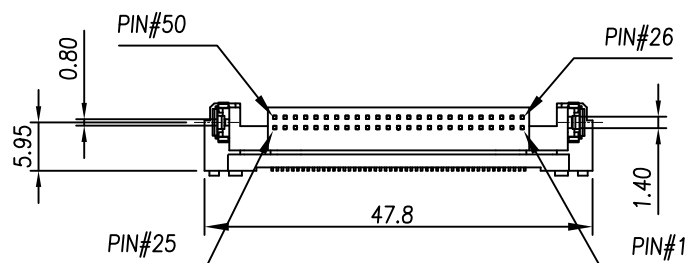

Pin Type	Interface Dim L	Pin Type
Detect	3.5 mm	25,26
General	4.25 mm	All Other Pins
Power	5.0 mm	1,13,38,50

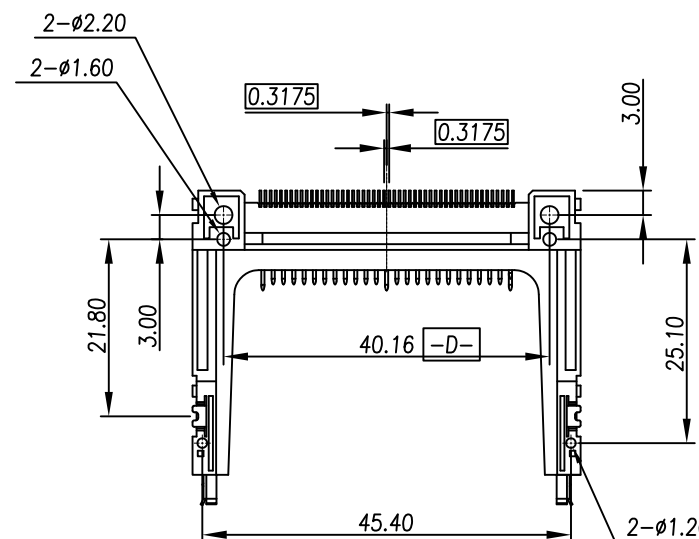

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

ORDER INFORMATION

CFC-PW40CE222HRS-50-LF

SERIES

MALE

90°SMT

POST TO POST 40.16mm C TYPE

TYPE 2

EAR

HOOK

RVS

STANDOFF 2.0mm




ST

RIGHT EJECTOR

LEADFREE

50WAY

DESCRIPTION: CF TYPE2 ,50PIN SMT REVERSE TYPE

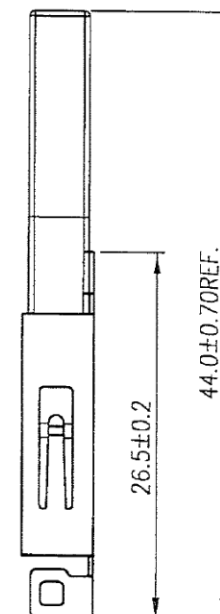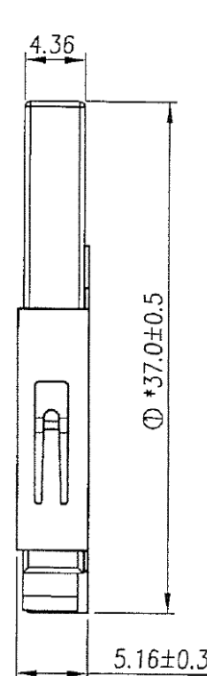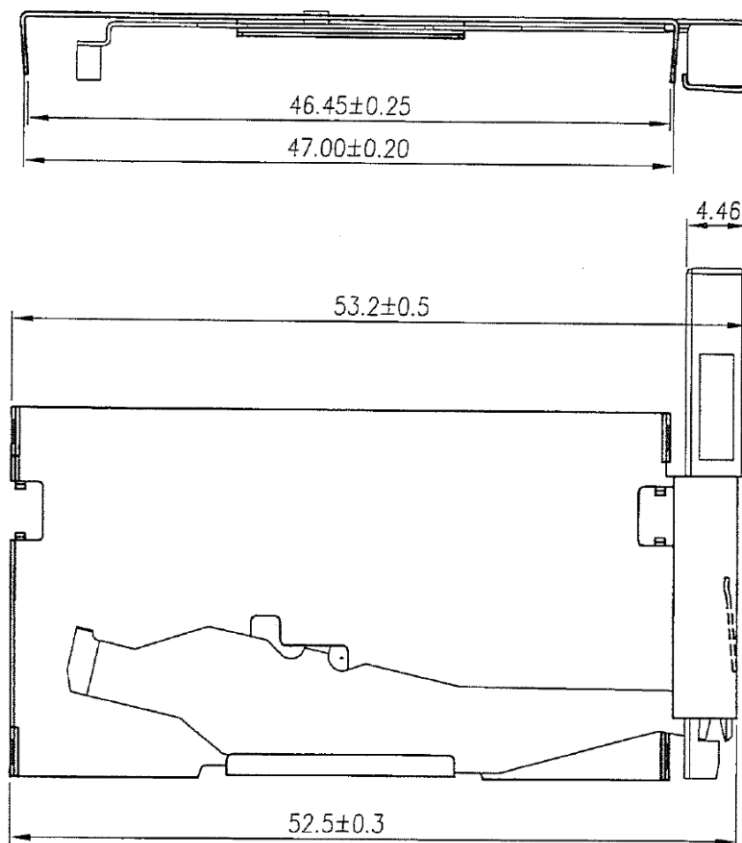

NOTES:

COVER: SUS 304,T=0.3mm

HEAVER:SUS304,T=0.3mm

EJECTOR:Hige temperature plastic COLOR=BLOCK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

CFC-PW40CE222HRS-50-LF

SERIES MALE 90°SMT TYPE 2 EAR RVS HOOK ST 50WAY LEADFREE
POST TO POST 40.16mm C TYPE STANDOFF 2.0mm RIGHT EJECTOR

DESCRIPTION: CF TYPE2 ,50PIN SMT REVERSE TYPE