
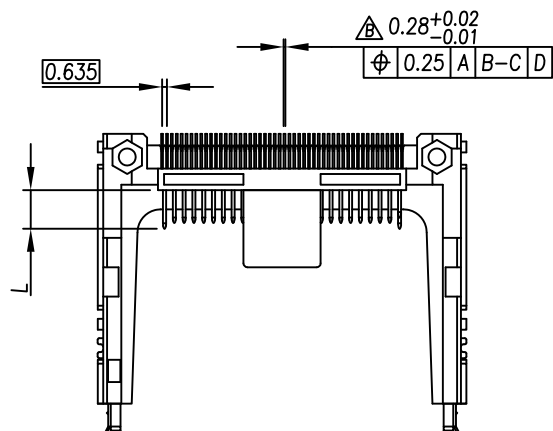
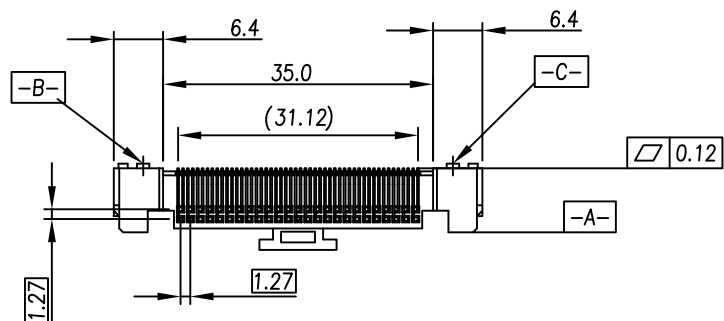
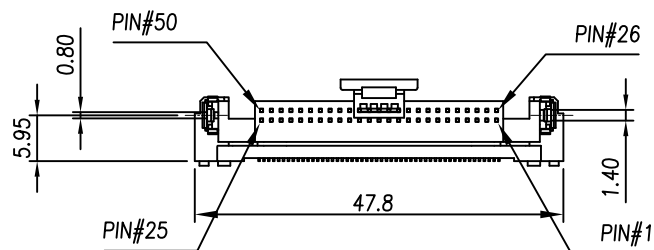


Pin lype	Interface Dim L	Pin lype
Detect	3.5 mm	25,26
General	4.25 mm	All Other Pins
Power	5.0 mm	1,13,38,50

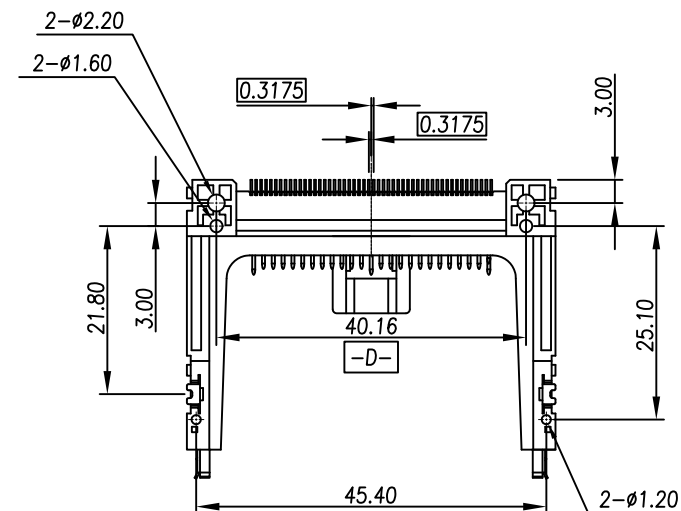

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ±

PPOJECTION




照片框

ORDER INFORMATION

CFC-PW40CE222HRSC-50-LF

SERIES
MALE
90°SMT
POST TO POST 40.16mm
C TYPE
EAR TYPE 2
ST
RIGHT EJECTOR
HOOK
RVS
STANDOFF 2.0mm
LEADFREE
50WAY
CAP

DESCRIPTION: CF TYPE2 , REVERSE TYPE STAND-OFF 2mm. WITH CAP

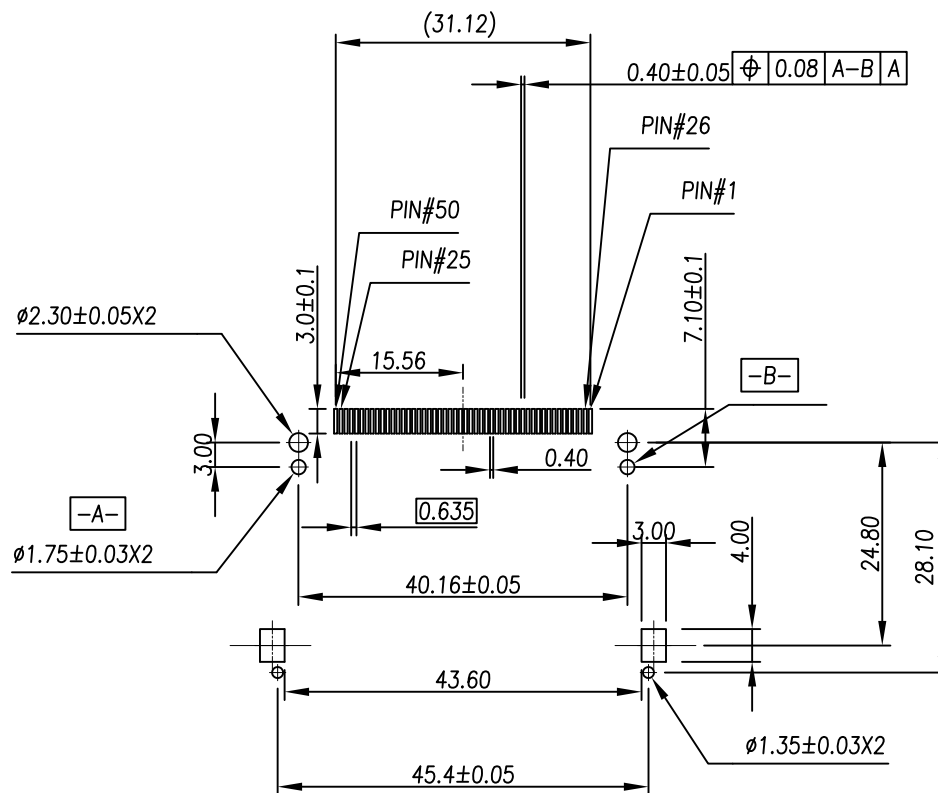

P.C.B Layout

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0
 CONTACT : Copper Alloys
 VOLTAGE RATING : 100VAC
 CURRENT RATING : 0.5A
 CONTACT RESISTANCE:40 m Ohm max.
 INSULATION RESISTANCE:1000M Ohm min.
 DIELECTRIC STRENGTH : 500VAC/1min
 OPERATION TEMPERATURE : -40°C~85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±




PPOJECTION

照片框

ORDER INFORMATION

CFC-PW40CE222HRSC-50-LF
 SERIES MALE 90°SMT POST TO POST 40.16mm C TYPE EAR TYPE 2
 ST RIGHT EJECTOR HOOK RVS STANDOFF 2.0mm
 LEADFREE 50WAY CAP

DESCRIPTION: CF TYPE2 , REVERSE TYPE STAND-OFF 2mm. WITH CAP

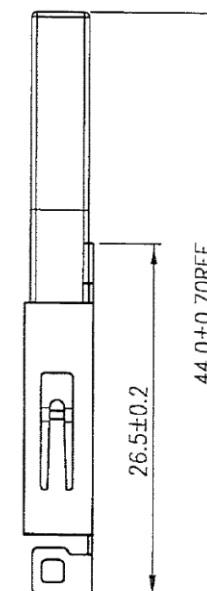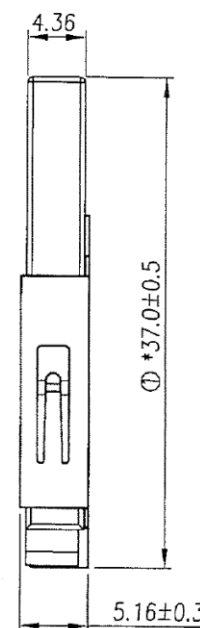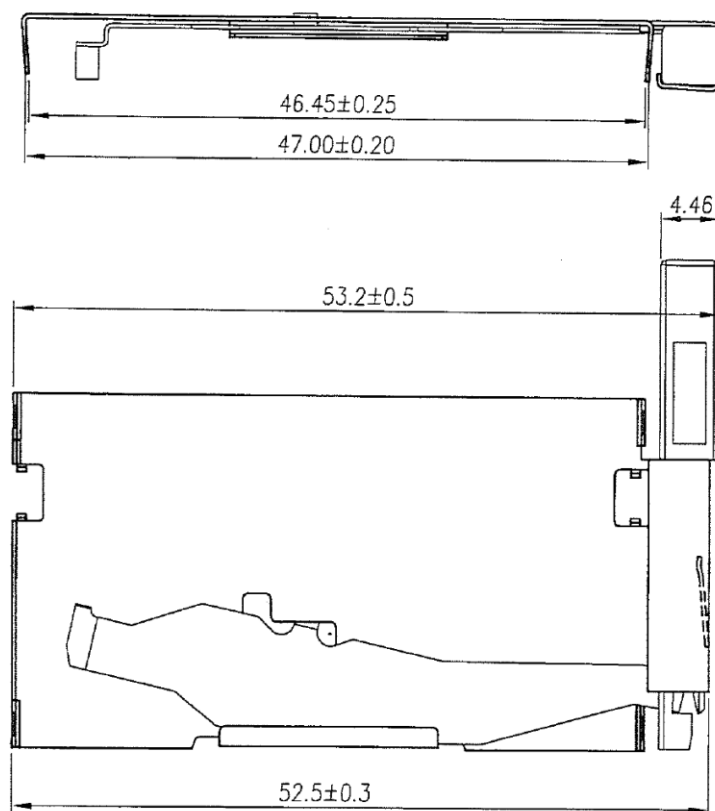

NOTES:

COVER: SUS 304,T=0.3mm

HEAVER:SUS304,T=0.3mm

EJECTOR:Hige temperature plastic COLOR=BLOCK

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

CFC-PW40CE222HRSC-50-LF

SERIES MALE 90°SMT POST TO POST 40.16mm C TYPE EAR TYPE 2 ST RIGHT EJECTOR HOOK RVS STANDOFF 2.0mm LEADFREE 50WAY CAP

DESCRIPTION: CF TYPE2 , REVERSE TYPE STAND-OFF 2mm. WITH CAP