
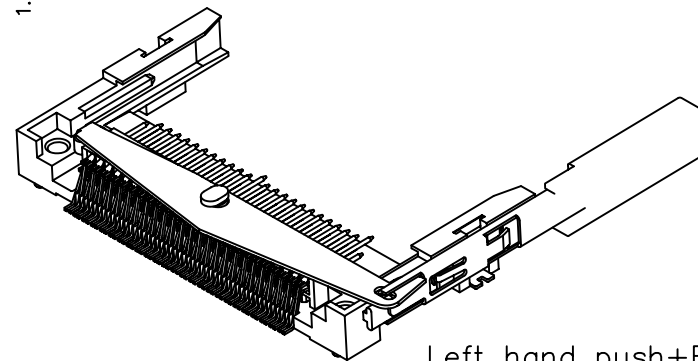


1. Contact : Underplating 50u" min Nickel,
Contant area 15u" AU over Nickel plated.
Solder tail 100u" min Sn/Pb over Nickel plated.
2. Ped : 100u" min Sn/Pb over 50u" min Nickel plated.

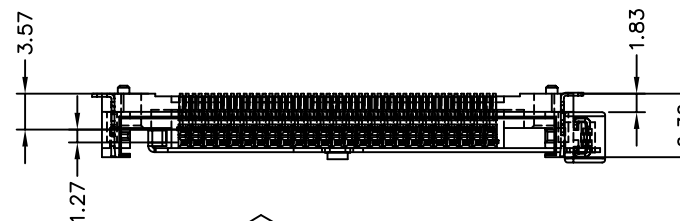

Pin type	n L Circuit No.	Dimensions mm
Detect	1,13,38,50	5.0 ± 0.1
General	2 to 12 , 14 to 24 27 to 37 , 39 to 49	4.25 ± 0.1
Power	25 , 26	3.5 ± 0.1

照片框

SERIES MALE 90°SMT POST 42.50mm B TYPE EAR TYPE 1 ST LEFT EJECTOR RVS STAND OFF 2.1mm 50WAY LEADFREE

DESCRIPTION: Compact Flash Card Socket SMT TYPE (Reverse type fit Type I CF Card)
Stand Off : 2.1mm & POST L=42.5mm