

1 2 3 4 5 6 7 8 9 0

J

I

H

G

F




E

D

C

B

A

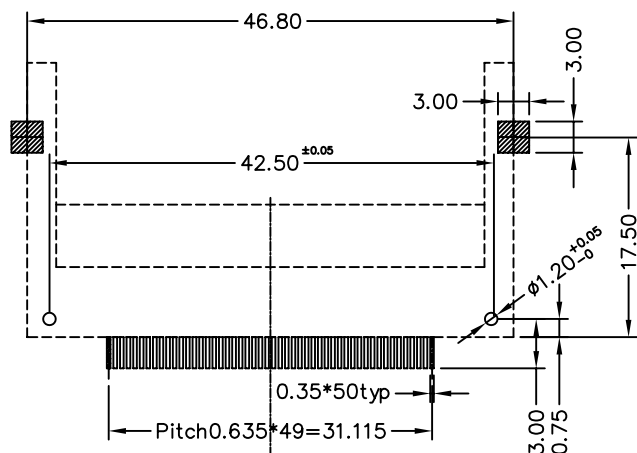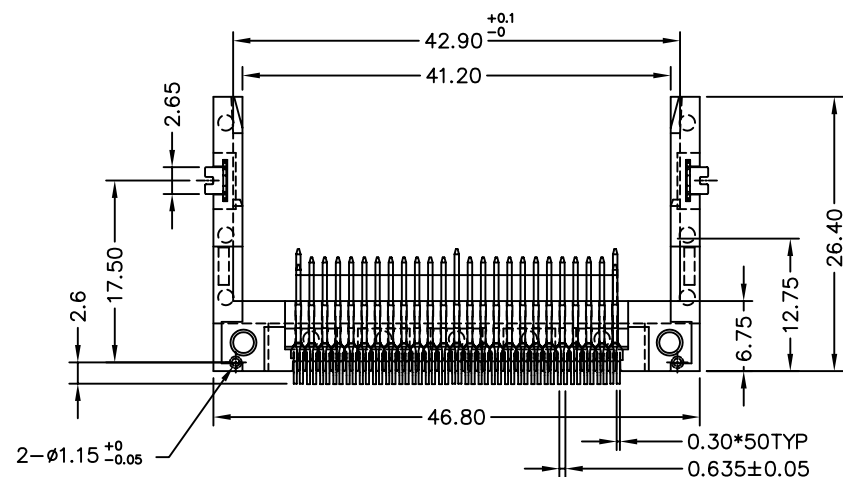

PCB Layout



### NOTE:

#### A. Material:

1. Housing : LCP 30% G.F. , UL94-V0 rated
2. Contact : Copper allpy
3. Pad : Brass

#### B. Plating

1. Contact : Underplating 50u" min Nickel,  
Contant area 15u" AU over Nickel plated.  
Solder tail 100u" min Sn/Pb over Nickel plated.
2. Ped : 100u" min Sn/Pb over 50u" min Nickel plated.

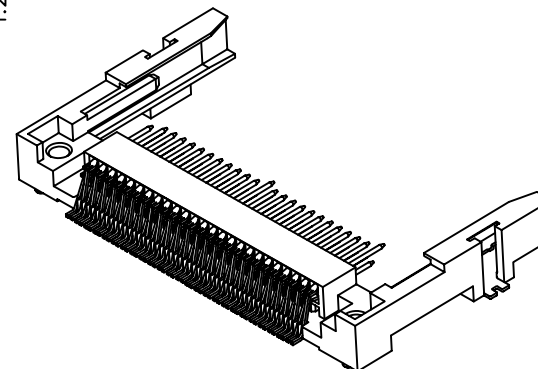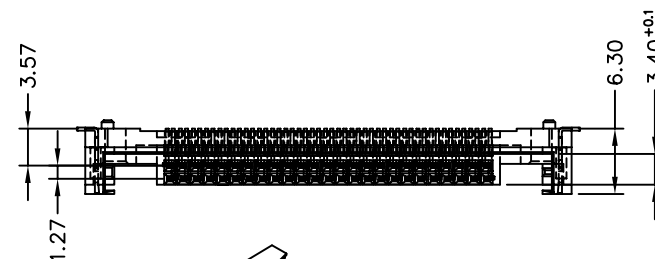

No push

Dimension L

| Pin type | Circuit No.                               | Dimensions mm |
|----------|-------------------------------------------|---------------|
| Detect   | 1,13,38,50                                | 5.0 ± 0.1     |
| General  | 2 to 12 , 14 to 24<br>27 to 37 , 39 to 49 | 4.25 ± 0.1    |
| Power    | 25 , 26                                   | 3.5 ± 0.1     |

CFC-PW43AX222-50-LF

LEADFREE

RoHS Compliant

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. CFC-PW43AX222-50

DWG NO. CFC-PW43AX222-50

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIP TION:

Compact Flash Card Socket SMT TYPE  
( Reverse type fit Type II CF Card)  
Stand Off : 2.1mm & POST L=42.5mm

AREA

REVISIONS

HK

DATE

煜倫股份有限公司