


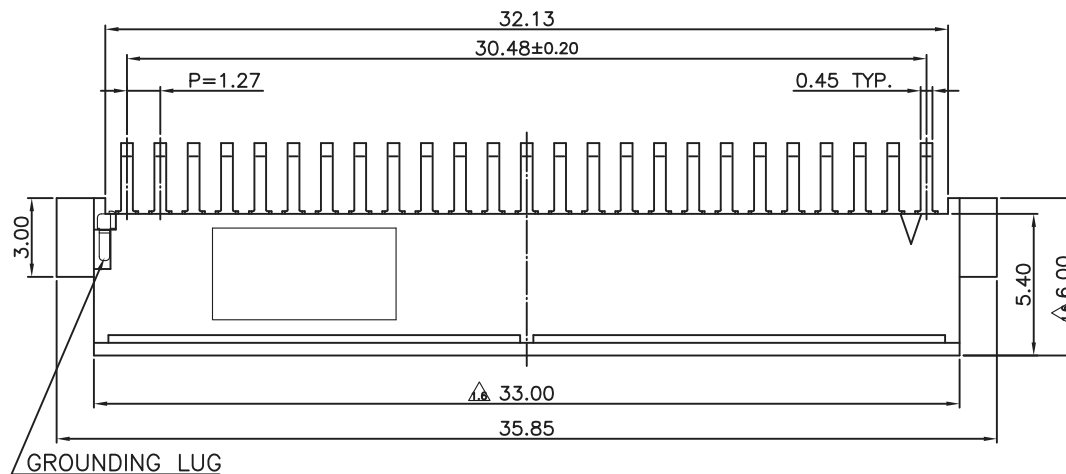

NOTES:

1. MATERIAL:

- (1) HOUSING:
THERMOPLASTIC; COLOR IN BLACK,
UL94V-0 RATED.
- (2) CONTACT AND GROUNDING LUG:
HIGH PERFORMANCE COPPER ALLOY.
THICKNESS=0.10mm.




2. CONTACT FINISH:

- (1) HALF-GOLD-TIN
(PLATING CODE: M,L,C,5,A,8,B,D)
UNDERPLATING NICKEL 50u" OVERALL.
SELECTED GOLD ON CONTACT AREA. (SEE TABLE A)
SELECTED LEAD FREE TIN 120u" ON SOLDER TAIL
- (2) FULL-GOLD
(PLATING CODE: P,E,F,G,H,I,J)
UNDERPLATING NICKEL 30u" OVERALL.
GOLD FLASH OVERALL.
SELECTED GOLD ON CONTACT AREA. (SEE TABLE A)

3. GROUNDING LUG FINISH:

- UNDERPLATING NICKEL 50u" OVERALL.
GOLD FLASH OVERALL.

4. PACKING: SEE TABLE A.

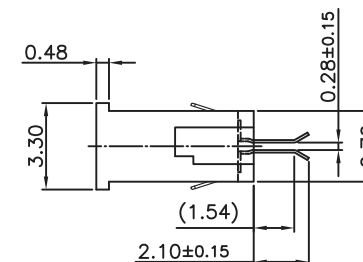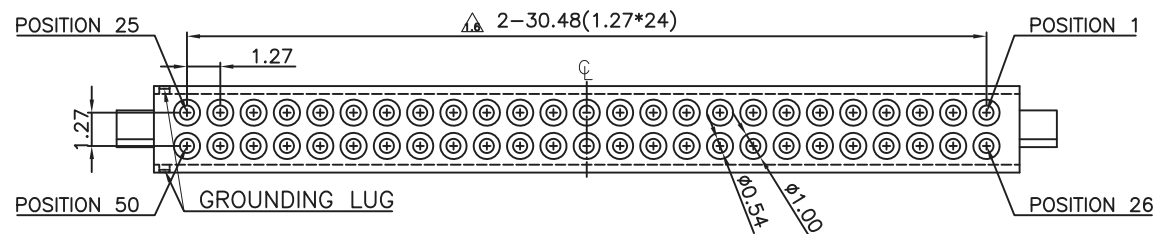

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

CFC-SE-50-LF
SERIES | T LEADFREE
50 WAY
EDGE CLIP
FEMALE

DESCRIPTION: 50 PIN CONN. , OFFSET 0.0mm STRADDLE MOUNT, W/GROUNDING LUG