


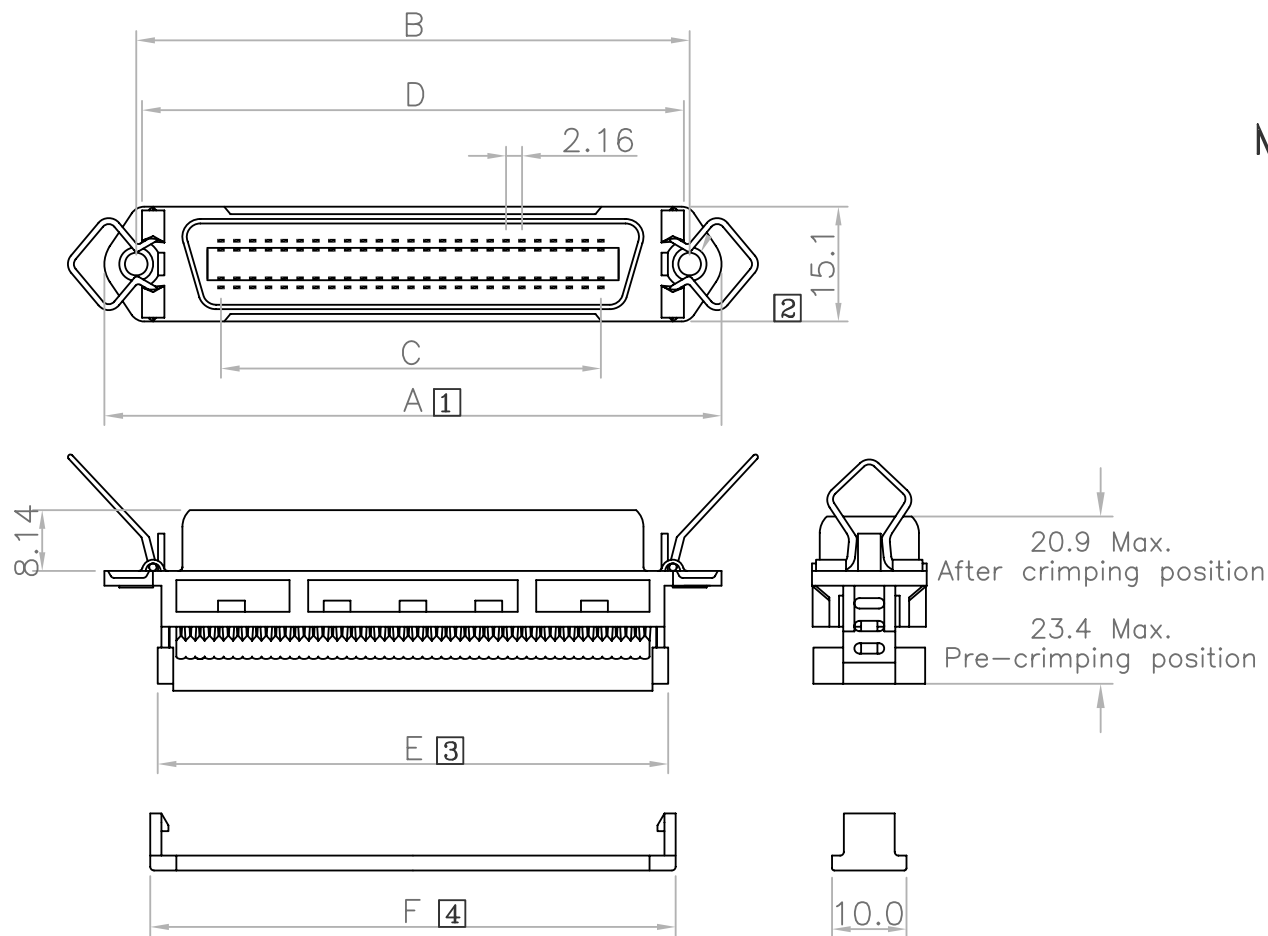

Δ Position

	A $\pm$ 0.25	B $\pm$ 0.13	C $\pm$ 0.13	D $\pm$ 0.20	E $\pm$ 0.25	F $\pm$ 0.25	G $\pm$ 0.25
24	54.70	46.78	23.76	45.68	35.50	37.50	45.88
36	67.80	59.74	36.72	58.65	51.50	53.75	58.85
50	82.80	74.85	51.84	73.75	68.50	70.90	73.95

Material & Finish

SHELL:

Steel
Zinc plated, Tin plated
or Nickel plated steel

PIN CONTACT:

Phosphor bronze or Brass

INSULATOR:

PBT & Glass-fibre reinforced
UL-94-V0

NUMBER OF CONTACT:

24,36,50

CURRENT RATING:

1 Amp

DIELECTRIC STRENGTH:

AC 500V Min.(for one minute)

INSULATOR RESISTANCE:

1000M Ω Min. (at 500V DC)

CONTACT RESISTANCE

25m Ω Max. mated

TEMPERATURE:

-25° C to +85° C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
X, $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION



ORDER INFORMATION

CFM-S-xx-LF
SERIES | T LEADFREE
24~50 WAY
FEMALE

DESCRIPTION: 57 I.D.C. FOR FLAT CABLE
FEMALE(METAL SHELL) (24 ~ 50)