



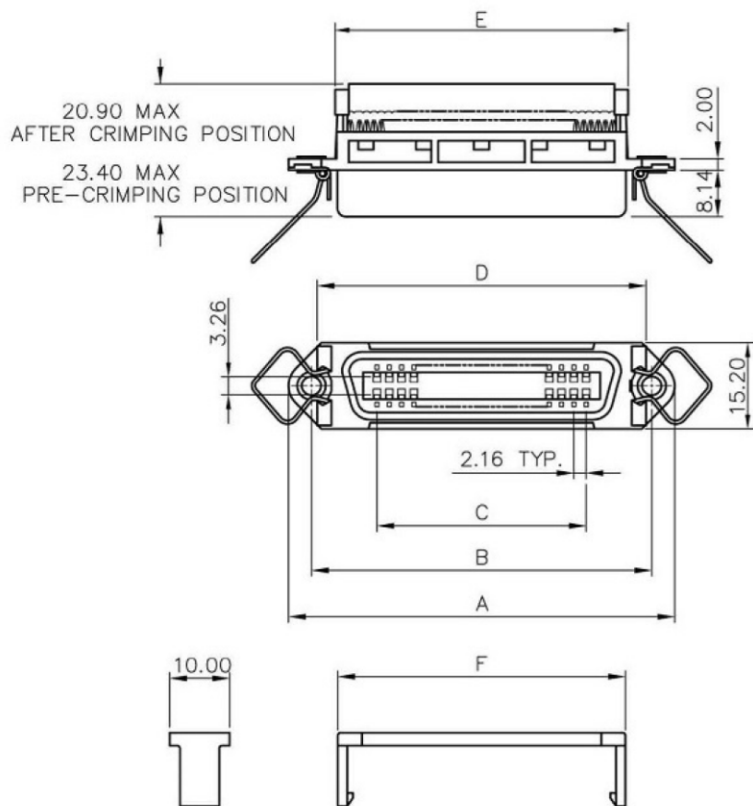


STRAIN RELIEF

SPECIFICATIONS:

- .Current rating : 1A : AWG28/1, 2A : AWG26
- .Insulation resistance : $\geq 1000 \text{ M}\Omega$
- .Dielectric withstanding volatge : 500V,at sea level
- .Operating temperature : $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$ (limited by cable)
- .Contact resistance : $\leq 20\text{m}\Omega$
- .Insulator material : polyster resin & glass reinforced,UL 94V-0
- .Contact material : phosphor bronze
- .Contact plating : gold over nickel
- .Wire size : AWG26 & AWG28 stranded, 1.27mm conductor center flat cable

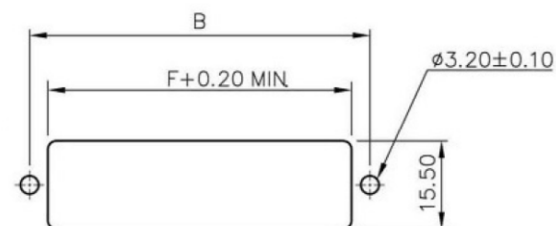


RECOMMEND FRONT MOUNT PANEL

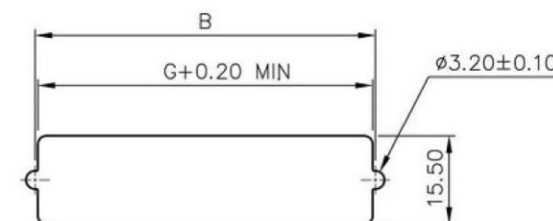

RECOMMEND REAR MOUNT PANEL

MOUNTING TYPE(OPTION)



73.95	70.90	68.50	73.75	51.84	74.85	82.80	CFM-SNM3-50
58.85	53.75	51.50	58.65	36.72	59.74	67.80	CFM-SNM3-36
45.88	37.50	35.50	45.68	23.76	46.78	54.70	CFM-SNM3-24
G+0.20	F±0.25	E±0.25	D±0.20	C±0.25	B±0.13	A±0.25	PART NO.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

CFM-SNM3-xx-LF
SERIES | T | LEADFREE
24.36.50WAY
NUT/M3*0.5
FEMALE

DESCRIPTION: