

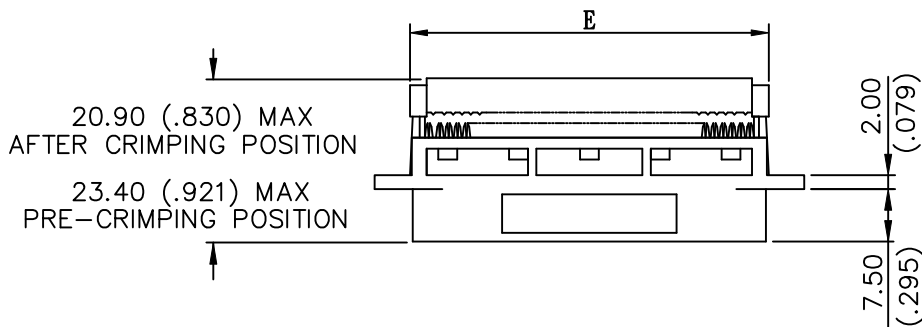


SPECIFICATIONS:

- .Current rating : 1A : AWG28/1, 2A : AWG26
- .Insulation resistance : $\geq 1000M\Omega$
- .Dielectric withstanding volatge : 500V,at sea level
- .Operating temperature : $-55^{\circ}C \sim 105^{\circ}C$ (limited by cable)
- .Contact resistance : $\leq 20m\Omega$
- .Insulator material : polyster resin & glass reinforced,UL 94V-0
- .Contact material : phosphor bronze
- .Contact plating : gold over nickel
- .Wire size : AWG26 & AWG28 stranded, 1.27mm conductor center flat cable

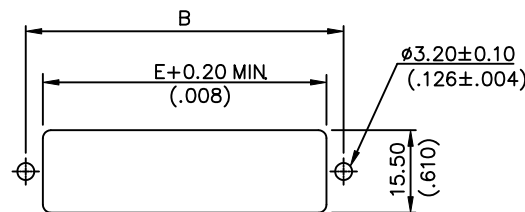

RECOMMEND FRONT MOUNT PANEL

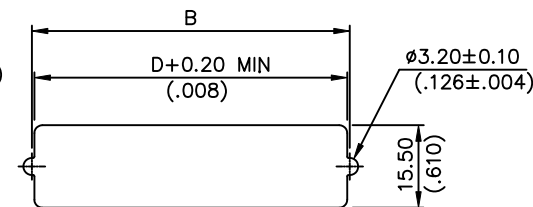

RECOMMEND REAR MOUNT PANEL

61.60 (2.425)	54.40 (2.142)	51.50 (2.027)	36.72 (1.446)	59.74 (2.352)	CFP-P-36
G ±0.25(.010)	F ±0.25(.010)	E ±0.25(.010)	C ±0.13(.005)	B ±0.13(.005)	PART NO.

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫有限公司

PART NO. CFP-P-36

DWG NO. CFP-P-36

FILE NO.


UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X
.XX
.XXX
AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE