

SPECIFICATIONS:

Current Rating:1A AWG#28/1,2A:AWG26

Contact Resistance:20 Milliohms Max.




Insulation Resistance:1000 Megohms Min.

Dielectric Withstanding voltage:500V AC AT Sea Level

Operating Temperature:-55° C TO +105°C (limited BY cABLE)

Insulator:Polyester Resin&Glass Reinforced(UL 94V-0)

Contact:Phosphor Bronze,Gold Plated Over Nickel

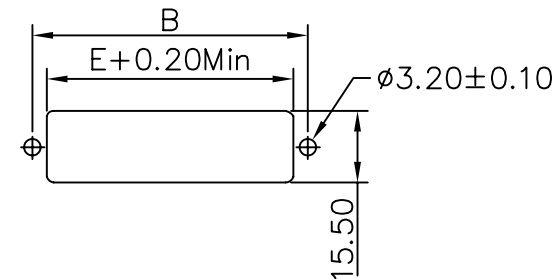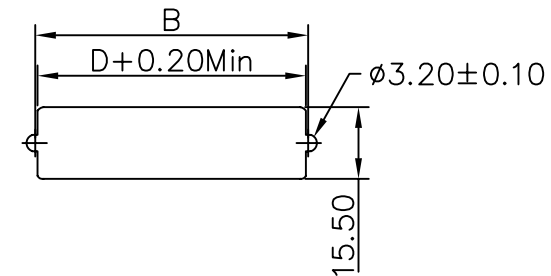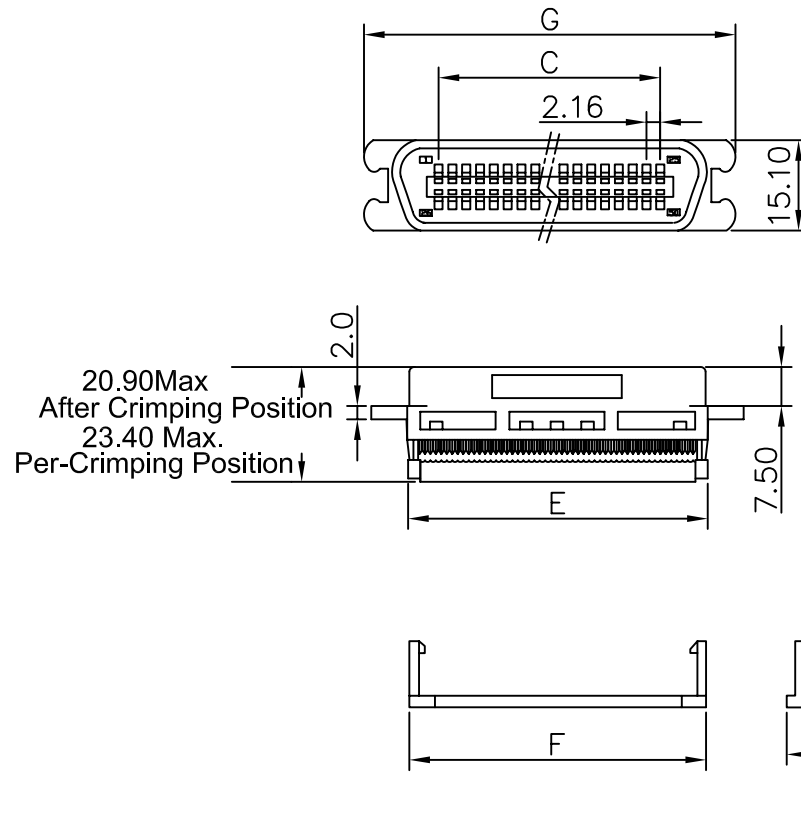

Number of Positions	A	B	C	D	E	G	F
36	±0.25	±0.13	±0.13	±0.25	±0.25	±0.25	±0.25
50		74.25	51.84	74.25	68.50	76.70	70.50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

CFP-P-xx-LF
SERIES T LEADFREE
36.50WAY
MALE

DESCRIPTION: